



# Low Loss TNC Male to TNC Female Bulkhead Cable RG174 Coax

The TNC male to TNC female bulkhead cable using RG174 coax, part number FMC00346, from Fairview Microwave is in-stock and ships same day. This Fairview TNC to TNC cable assembly has a male to female gender configuration with 50 ohm flexible RG174 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00346 TNC male to TNC female cable assembly operates to 1 GHz. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

# **Configuration:**

- TNC Male
- TNC Female Bulkhead
- RG174

#### **Features:**

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

# **Applications:**

- General Purpose
- · Laboratory Use

# **Electrical Specifications**

Description	Min	Т	ур Мах	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		ć	66	%
Capacitance	3	1.08	[101.97]	pF/ft [pF/m]

### **Performance by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.04	0.08	0.13	0.21	0.31	dB/ft
	0.13	0.26	0.43	0.69	1.02	dB/m

**Electrical Specification Notes:** 

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

#### **Mechanical Specifications**

#### **Cable Assembly**

Diameter 0.68 in [17.27 mm]

### Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Jacket Material
Jacket Diameter

RG174 50 Ohms Stranded Copper Clad Steel

1

Tinned Copper Braid PVC, Black

0.11 in [2.79 mm]

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Connectors**

Description	Connect	or 1	Connector 2		
Туре	TNC Male		TNC Female		
Mount Method			Bulkhead	_	
Specification			MIL-STD-348	MIL-STD-348	
Impedance	50 Ohr	ns	50 Ohms		
Contact Material & Plating	Brass, G	old	Phosphor Bronze, Gold		
Dielectric Type	PTFE		PTFE		
Outer Cond Material & Plati	ng		Brass, Nickel		
Body Material & Plating	Brass, Ni	ckel	Brass, Nickel		
Coupling Nut Material & Pla	ting Brass, Ni	ckel			
Hex Size			5/8 in		

#### **Environmental Specifications**

**Temperature** 


Operating Range -40 to +80 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

## **How to Order**

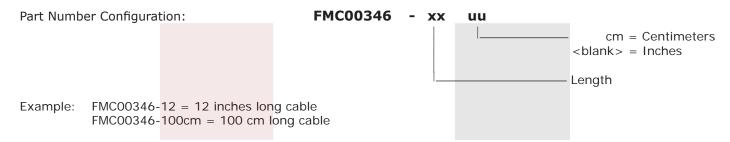

Low Loss TNC Male to TNC Female Bulkhead Cable RG174 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss TNC Male to TNC Female Bulkhead Cable RG174 Coax FMC00346

URL: https://www.fairviewmicrowave.com/low-loss-tnc-male-tnc-female-cable-rg174-coax-fmc00346-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





