

# FMC0101600LF DATA SHEET

# Low Loss N Male to N Male Cable LMR-600 Coax with Times Microwave Connectors with LF Solder

The type N male to type N male cable using LMR-600 coax, part number FMC0101600LF, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-600 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC0101600LF type N male to type N male cable assembly operates to 6 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### **Electrical Specifications**

Description	Min	Typ Max		Units			
Frequency Range	DC			6	GHz		
Velocity of Propagation		8	37		%		
RF Shielding	90				dB		
Capacitance		23.4 [	[76.77]		pF/ft [pF/m]		
Inductance		0.058	[0.19]		uH/ft [uH/m]		
DC Resistance Inner Conductor		0.53 [1.74]			<u>Ω/1000ft [Ω/Km]</u>		
DC Resistance Outer Conductor		1.2 [3.94]			Ω/1000ft [Ω/Km]		

#### **Mechanical Specifications**

#### **Cable Assembly**

Length\* Weight

#### Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter 0 in [0 mm] 0.389 lbs [176.45 g]

LMR-600 50 Ohms Solid Copper Clad Aluminum PE (F) 2 Tinned Copper Aluminum Tape PE, Black 0.59 in [14.99 mm]



## **Configuration:**

- N Male
- N Male
- LMR-600

#### **Features:**

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket

### **Applications:**

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave

an INFINIT<sup>©</sup> brand



#### Connectors

Description	Connector 1	Connector 2	-
Туре	N Male	N Male	-
Configuration	Straight	Straight	-
Impedance	50 Ohms	50 Ohms	-
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	-
Dielectric Type	PTFE	PTFE	_
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal	-
Coupling Nut Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal	-
nvironmental Specification Temperature Operating Range ompliance Certifications lotted and Other Data Notes:	-40 to	+85 deg C current document)	
ow to Order			
Part Number Configuration:	FMC01	.01600LF - xx ι	u   cm = Centimeters <blank> = Inches</blank>
	12 = 12 inches long ca 100cm = 100 cm long		Length

Low Loss N Male to N Male Cable LMR-600 Coax with Times Microwave Connectors with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss N Male to N Male Cable LMR-600 Coax with Times Microwave Connectors with LF Solder FMC0101600LF


URL: https://www.fairviewmicrowave.com/standard-n-male-n-male-cable-Imr600-coax-fmc0101600lf-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





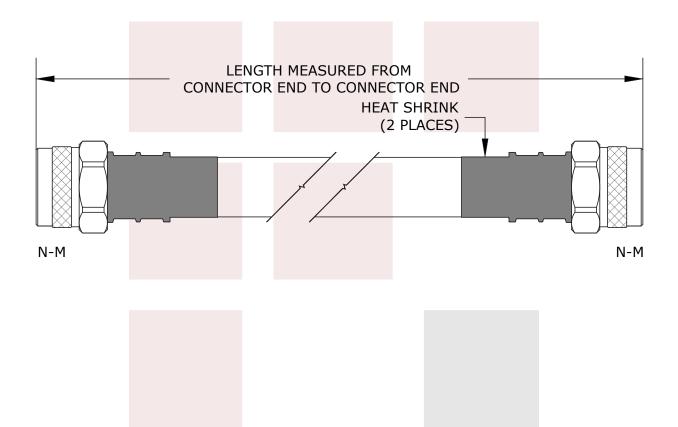

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE Low Loss N Male to N Male Cable LMR-600 Coax with Fimes Microwave Connectors with LF Solder	DWG NO FMC0101600LF			CAGE CODE 3FKR5		
	CAD FILE 101014	SHEET	SCALI	E N/A	SIZE A	5568

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689