

Low Loss RA TNC Male to RA TNC Male Cable LMR-195-UF Coax with LF Solder



FMCA100268

Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-195-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 3 MHz
- Shielding Effectivity > 90 dB
- 74% Phase Velocity
- Double Shielded
- TPE Jacket

Applications

- General Purpose
- Laboratory Use

Description

The RA TNC male to RA TNC male cable using LMR-195-UF coax, part number FMCA100268, from Fairview Microwave is in-stock and ships same day. This Fairview TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-195-UF coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100268 TNC male to TNC male cable assembly operates to 3 MHz. The right angle TNC interfaces on the LMR-195-UF cable allow for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.35:1	
Velocity of Propagation		74		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		9.5 [31.17]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			500	Vrms

Low Loss RA TNC Male to RA TNC Male Cable
LMR-195-UF Coax with LF Solder



FMCA100268

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			3,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency					MHz	
FMCA100268	Custom Lengths Available	Insertion Loss (Typ.)	0.042	0.068	0.097	0.132	0.246	dB/ft	
			0.14	0.23	0.32	0.44	0.81	dB/m	
FMCA100268-12	12 Inch	Insertion Loss (Typ.)	0.45	0.47	0.5	0.54	0.65	dB	0.145
FMCA100268-24	24 Inch	Insertion Loss (Typ.)	0.49	0.54	0.6	0.67	0.9	dB	0.166
FMCA100268-36	36 Inch	Insertion Loss (Typ.)	0.53	0.61	0.7	0.8	1.14	dB	0.187
FMCA100268-60	60 Inch	Insertion Loss (Typ.)	0.61	0.74	0.89	1.06	1.63	dB	0.229
FMCA100268-300	300 Inch	Insertion Loss (Typ.)	1.45	2.1	2.83	3.7	6.55	dB	0.649

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.145 pounds
Additional Weight per Inch:	0.00175 pounds

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.145 lbs [65.77 g]

Cable

Cable Type	LMR-195-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	Foam PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper
Jacket Material	TPE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Low Loss RA TNC Male to RA TNC Male Cable
LMR-195-UF Coax with LF Solder



FMCA100268

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	TNC Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Values at 25°C, sea level.


Low Loss RA TNC Male to RA TNC Male Cable
LMR-195-UF Coax with LF Solder



FMCA100268

Typical Performance Data

How to Order

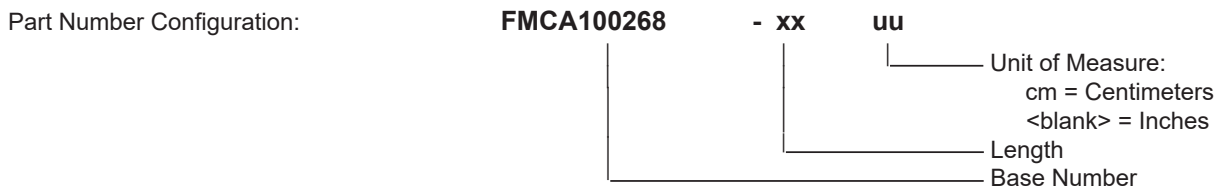

Example: FMCA100268-12 = 12 inches long cable
FMCA100268-100cm = 100 cm long cable

Low Loss RA TNC Male to RA TNC Male Cable LMR-195-UF Coax with LF Solder from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [Low Loss RA TNC Male to RA TNC Male Cable LMR-195-UF Coax with LF Solder FMCA100268](#)

URL: <https://www.fairviewmicrowave.com/low-loss-ra-tnc-male-to-ra-tnc-male-cable-lmr-195-uf-coax-with-lf-solder-fm-ca100268-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMCA100268 CAD Drawing

Low Loss RA TNC Male to RA TNC Male Cable LMR-195-UF Coax with LF Solder

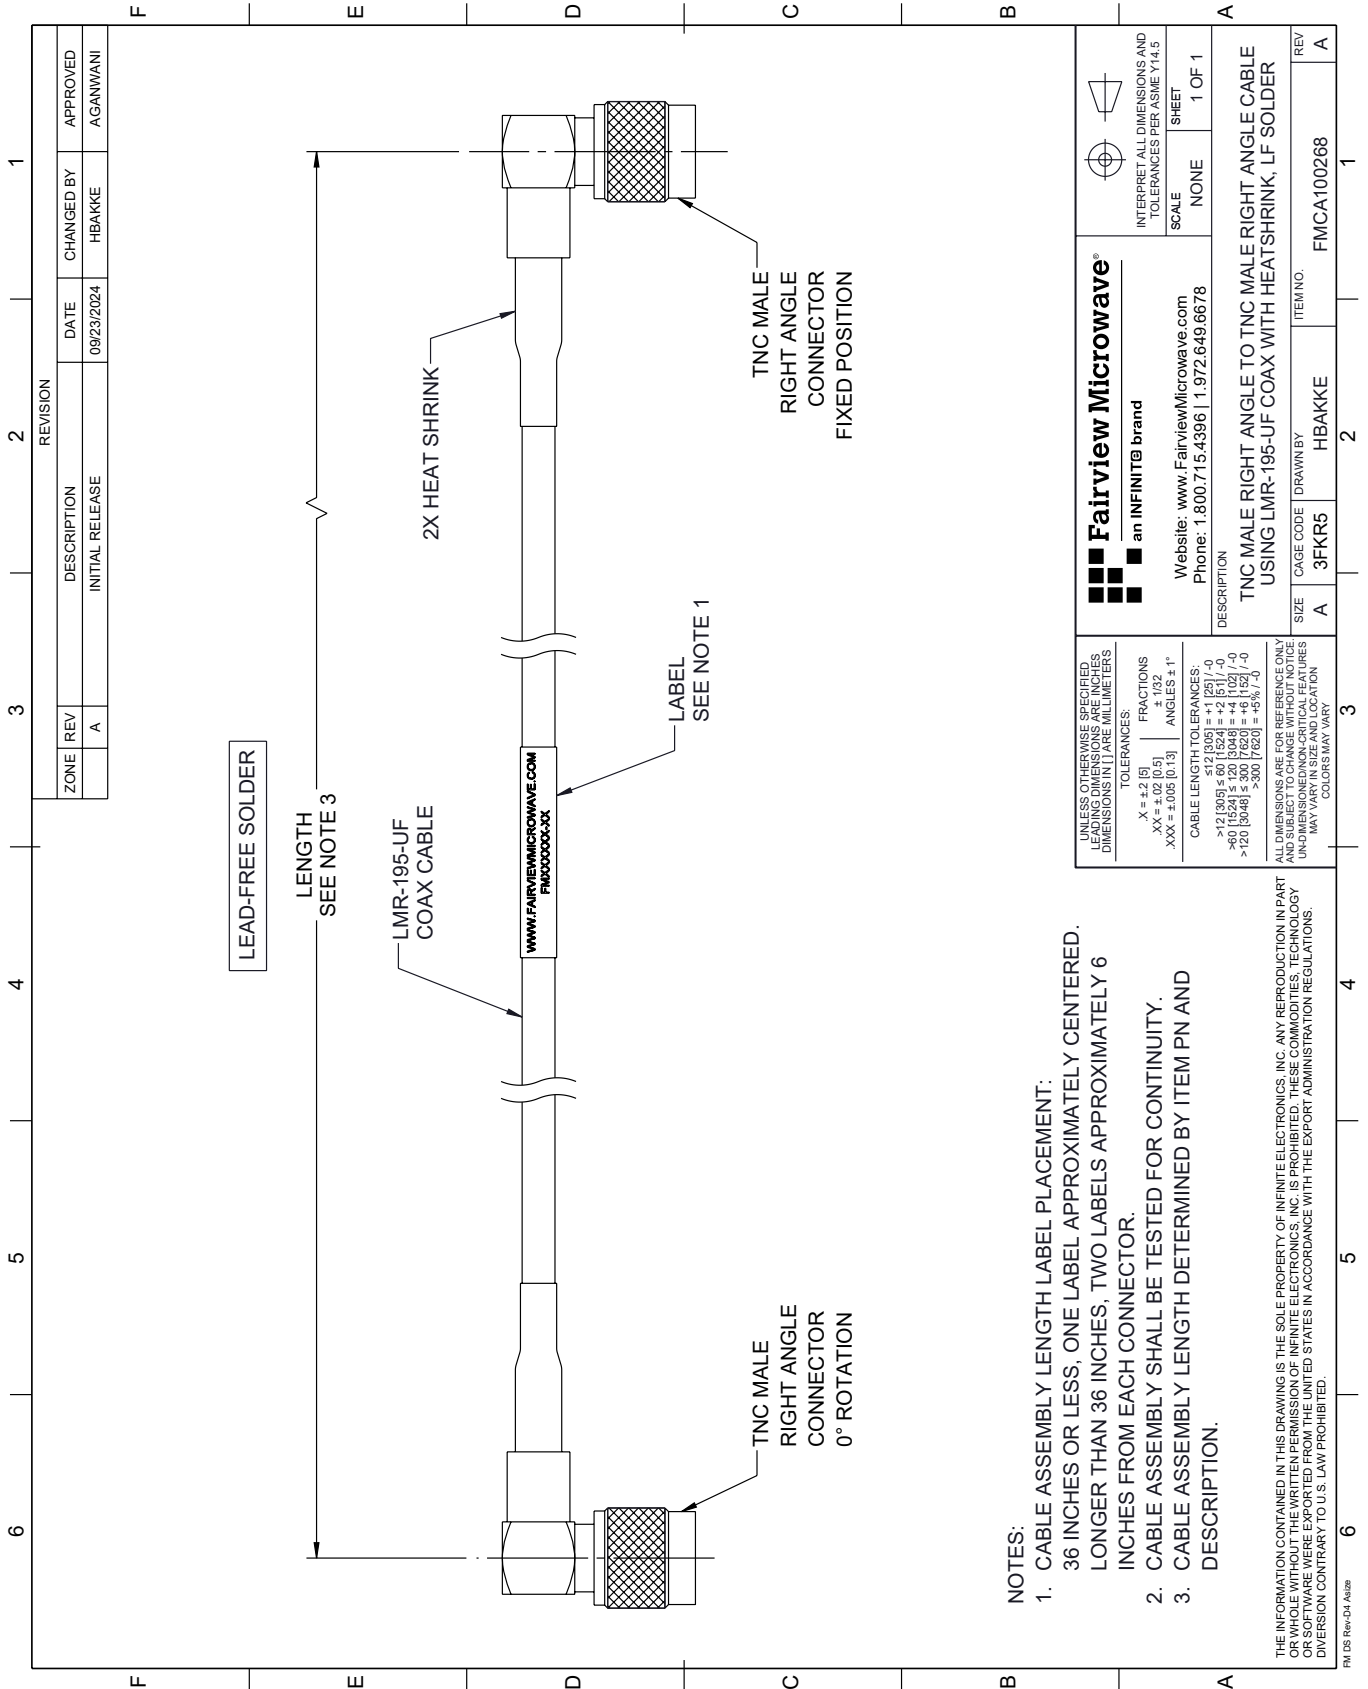

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

FM DS Rev-D4 Alt2b

<p>Fairview Microwave® an INFINIT® brand</p> <p>Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678</p>		<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
<p>UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, TRAILING DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCES:</p> <p>.X = ±.2 [5] FRACTIONS ± 1/32</p> <p>.XX = ±.02 [0.5] ANGLES ± 1°</p> <p>.XXX = ±.005 [0.13]</p> <p>CABLE LENGTH TOLERANCES:</p> <p><12 [305] ≤ 60 [1524] = ±.1 [25] / -0</p> <p>>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0</p> <p>>120 [3048] ≤ 300 [7620] = ±.6 [15] / -0</p> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.</p>		
<p>DESCRIPTION</p> <p>TNC MALE RIGHT ANGLE TO TNC MALE RIGHT ANGLE CABLE USING LMR-195-UF COAX WITH HEATSHRINK, LF SOLDER</p>	<p>SIZE</p> <p>A</p>	<p>ITEM NO.</p> <p>FMCA100268</p>
<p>DRAWN BY</p> <p>3FKR5</p>	<p>DRAWN BY</p> <p>HBAKKE</p>	<p>REV</p> <p>A</p>

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV			
	A	09/23/2024	HBAKKE	AGANWANI
DESCRIPTION				
INITIAL RELEASE				