

FMCA1050 DATA SHEET

N Female Bulkhead to N Male Cable FM141FLEX Coax

The type N female bulkhead to type N male cable using FM141FLEX coax, part number FMCA1050, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a female to male gender configuration with 50 ohm flexible FM141FLEX coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1050 type N female to type N male cable assembly operates to 18 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB. Our new series of flexible cables use high performance FM141FLEX coax and are terminated with a new low profile connector design. These high performance flexible cables are an ideal choice for many applications including in-rack RF devices where tight bends and continual flexure might be required. Our FM141FLEX is a flexible coax alternative to semi-rigid coax and has a solid PTFE resulting in a 69.5% phase velocity. This series features a smooth wall formed by the braid-over-sprial-ribbon design and has similar performance to a solid wall RG402 semi-rigid RG402 cable.

These FM141FLEX cables are similar to our existing SCA1814 cables. The heavier duty SCA1814 test cables have similar electrical performance, but include a heavy duty strain relief mechanism and extra booting material as well as a thick wall SMA connector to increase the ruggedness of the SCA1814 cables for use in more demanding test environments.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

-				
Description	Min	Тур	Мах	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Return Loss			-15.56	dB
Velocity of Propagation		69.5		%
RF Shielding	90			dB
Group Delay		1.44 [4.72]		ns/ft [ns/m]
Capacitance		29.4 [96.46]	pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms
Capacitance]	pF/ft [j

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	3	6	12	18		GHz
Insertion Loss (Max.)	0.45	0.65	0.95	1.19		dB/ft
	1.48	2.13	3.12	3.9		dB/m



Configuration:

- N Female Bulkhead
- N Male
 FM141FLEX

Features:

- Max Frequency 18 GHz
- Shielding Effectivity > 90 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

0.4 inch

- 500 Mating Cycles
- Typical N Type VSWR 1.31:1 to 18 GHz Shielding effectivity > 90dB One time minimum bend radius:

Applications:

- General Purpose
- Laboratory Use
- High Performance RF equipment interconnect
- Flexible in cabinet or in the rack requirements

Inside the box RF routing

General purpose lighter duty lab use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave

an INFINIT[®] brand



VSWR (Max.)	1.18:1	1.25:1	1.3:1	1.4:1	
Power Handling (Max	.) 215	150	105	88	W

Electrical Specification Notes:

Insertion Loss Max is based on cable and does not include connector loss

Mechanical Specifications

Cable Assembly Length*

0 in [0 mm]

Cable					
Cable Type		FM14	1FLEX		
Impedance		50 O	hms		
Inner Conductor Type		Solid			
Inner Conductor Materi	al and Plating	Copp	er Clad Steel, Silve	er	
Dielectric Type		PTFE			
Number of Shields		2			
Shield Layer 1		Silve	r Plated Copper Ta	ре	
Shield Layer 2		Silve	r Plated Copper Br	aid	
Jacket Material		FEP			
Jacket Diameter		0.16	3 in [4.14 mm]		
One Time Minimum Ber	nd Radius	0.39	in [9.91 mm]		
Repeated Minimum Ber	nd Radius	1.57	in [39.88 mm]		

Connectors

Description	Connector 1	Connector 2
Туре	N Female	N Male
Mount Method	Bulkhead	
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material & Plating	Beryllium Copper, Gol	d Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material & Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material & Pla	ting Brass, Nickel	Brass, Nickel
Hex Size		3/4 Inch

Environmental Specifications

Temperature Operating Range

-40 to +150 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





How to Order

Part Number Configuration:

FMCA1050 - xx



Example: FMCA1050-12 = 12 inches long cable FMCA1050-100 cm = 100 cm long cable

N Female Bulkhead to N Male Cable FM141FLEX Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: N Female Bulkhead to N Male Cable FM141FLEX Coax FMCA1050

URL: https://www.fairviewmicrowave.com/n-female-n-male-cable-fm141flex-coax-fmca1050-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





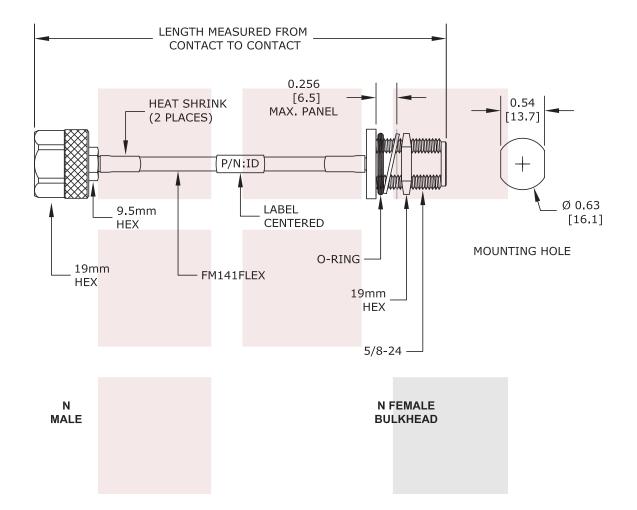

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
N Female Bulkhead to N Male Cable FM141FLEX Coax	DWG NO FMCA1050			CAGE CODE 3FKR5		
	CAD FILE 032715	SHEET	SCAL	E N/A	SIZE A	200

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689