



Low Loss SMA Female to SMA Female Cable LL142 Coax with LF Solder

The SMA female to SMA female cable using LL142 coax, part number FMCA1255, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a female to female gender configuration with 50 ohm flexible LL142 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1255 SMA female to SMA female cable assembly operates to 18 GHz. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 95 dB. Fairview High performance test cables boast 83% phase velocity and offer excellent low loss performance up to 18 GHz. The FMCA1255 cable assemblies use durable stainless steel connectors and an FEP jacket. The connector/cable interface has double heat-shrink booting which provides added strain relief while increasing the durability of the cable assembly. The low attenuation per foot in a 0.195 inch diameter cable creates a cable that has good flexibility while offering industry leading loss characteristics. All FMCA1255 cable assemblies are 100% RF tested to ensure the VSWR and insertion loss specifications meet or exceed Fairview's published electrical specifications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Тур	Тур Мах		
Frequency Range	DC		18	GHz	
VSWR			1.35:1		
Return Loss			16.54	dB	
Insertion Loss			0.4	dB	
			1.31	dB	
Velocity of Propagation		83		%	
RF Shielding	95			dB	
Capacitance		25 [82.02]	25 [82.02] pF/ft [pl		

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.1	0.14	0.2	0.29	0.4	dB/ft
	0.33	0.46	0.66	0.95	1.31	dB/m
Insertion Loss (Typ.)	0.07	0.1	0.16	0.23	0.33	dB/ft
	0.23	0.33	0.52	0.75	1.08	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.05dB x SQRT(Frequency GHz) per connector.



Configuration:

- SMA Female
- SMA Female
- LL142

Features:

- Max Frequency 18 GHz
- Shielding Effectivity > 95 dB
- 83% Phase Velocity
- Triple Shielded
- FEP Jacket
- 83% Velocity of Propagation (Vop)
- Shielding effectiveness >95 dB
- Maximum VSWR is < 1.35:1 to 18 GHz
- Minimum Bend Radius of 1 inch
- Operating Temperature range of -55 to +125°C
- 100% RF Tested
- Custom lengths available

Applications:

- General Purpose
- Laboratory Use
- Long Run coaxial cable applications
- Antenna testing
- Low loss system cables

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Mechanical Specifications

Cable Assembly

Length* 0 in [0 mm]

Cable

Cable Type LL142
Impedance 50 Ohms
Inner Conductor Type Solid

Inner Conductor Material and Plating Copper, Silver

Dielectric Type PTFE Number of Shields 3

Shield Layer 1 Silver Plated Copper Tape
Shield Layer 2 Aluminum Polyester

Shield Layer 3 Silver Plated Copper Wire

Jacket Material FEP, Green

Jacket Diameter 0.195 in [4.95 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2			
Туре	SMA Female	SMA Female			
Impedance	50 Ohms	50 Ohms			
Contact Material & Plating	Beryllium Copper, Go	old Beryllium Copper, Gold			
Contact Plating Spec.	ASTM-B488, 50μ In.	MinASTM-B488, 50μ In. Minimum			
Dielectric Type	PTFE	PTFE			
Outer Cond Material & Plati	ng Passivated Stainless S	Steel Passivated Stainless Steel			
Outer Cond Plating Spec.	SAE-AMS-2700	SAE-AMS-2700			
Body Material & Plating	Passivated Stainless S	Steel Passivated Stainless Steel			
Body Plating Spec.	SAE-AMS-2700	SAE-AMS-2700			

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

How to Order

Part Number Configuration:

FMCA1255 - xx uu

| cm = Centimeters
| clank > = Inches

Length

Example: FMCA1255-12 = 12 inches long cable

FMCA1255-100cm = 100 cm long cable





Low Loss SMA Female to SMA Female Cable LL142 Coax with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss SMA Female to SMA Female Cable LL142 Coax with LF Solder FMCA1255

The information contained in this document is accurate to the best of our knowledge and representative of the part


URL: https://www.fairviewmicrowave.com/low-loss-sma-female-sma-female-cable-II142-coax-fmca1255-p.aspx

described	herein. It may be necessar	y to make modi	fications to the part a	and/or t	he documentation of the part	t, in order
to impleme	ent improvements. Fairview	Microwave rese	rves the right to mak	e such	changes as required. Unless	otherwise
					resentation or warranty rega	
			lar purpose, and Fair	view Mi	crowave does not assume ar	ny liability
arising out	t of the use of any part or do	ocumentation.				

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





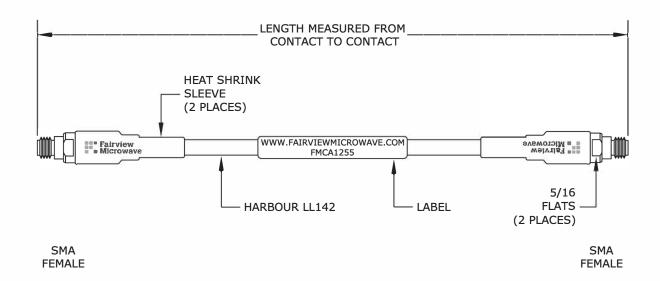

NOTE:

LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. LONGER THAN 48" WILL BE 6" AWAY FROM CONNECTOR.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Low Loss SMA Female to SMA Female Cable LL142	DWG NO FMCA1255			CAGE CODE 3FKR5		
Coax with LF Solder	CAD FILE 072216	SHEET	SCAL	E N/A	SIZE A	2233