



Low Loss Test N Male to N Female Cable LL335i Coax

The type N male to type N female cable using LL335i coax, part number FMCA1289, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to female gender configuration with 50 ohm flexible LL335i coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1289 type N male to type N female cable assembly operates to 18 GHz. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 95 dB. The FMCA1289 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All FMCA1289 cable assemblies are 100% continuity and RF tested to published specifications. Custom lengths are built to order and shipped same day.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Min	Min Typ		Units
DC		18	GHz
		1.4:1	
	83		%
95			dB
	25 [82.02]		pF/ft [pF/m]
	DC	DC 83	DC 18 1.4:1 83 95

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.06	0.08	0.12	0.18	0.26	dB/ft
	0.2	0.26	0.39	0.59	0.85	dB/m
Insertion Loss (Typ.)	0.05	0.07	0.1	0.15	0.22	dB/ft
Power Handling (Max.)	0.16 1,800	0.23 1,200	0.33 900	0.49 650	0.72 400	dB/m W

Electrical Specification Notes:

Power handling values are calculated based on Cable properties. Power handling will vary based on the actual VSWR of the cable assembly. Insertion Loss does not include the loss of the connectors, insertion loss is estimated as .1dB per connector.



Configuration:

- N Male
- N Female
- LL335i

Features:

- Max Frequency 18 GHz
- Shielding Effectivity > 95 dB
- 83% Phase Velocity
- Triple Shielded
- FEP Jacket
- 83% Velocity of Propagation
- Shielding effectiveness 95 Db
- Maximum VSWR is 1.40:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125°C
- Same day shipment of custom lengths
- 100% Continuity and RF tested

Applications:

- General Purpose
- Test & Measurement
- Laboratory Use
- General Purpose
- Test & Measurement
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (9)

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Mechanical Specifications

Cable Assembly

Length* 0 in [0 mm]

Weight 0.075 lbs [34.02 g]

Cable

Cable Type LL335i
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper, Silver

Dielectric Type PTFE Number of Shields 3

Shield Layer 1 Silver Plated Copper Tape
Shield Layer 2 Aluminum Polyester
Shield Layer 3 Silver Plated Copper Wire

Jacket MaterialFEP, GreenJacket Diameter0.3 in [7.62 mm]

Repeated Minimum Bend Radius 1.5 in [38.1 mm]

Connectors

Description	Connect	or 1	Connecto	or 2
Туре	N Mal	e	N Femal	е
Specification			MIL-STD-3	348
Impedance	50 Ohr	ns	50 Ohm	S
Mating Cycles	500			
Contact Material & Plating	Beryllium Copper, G	old ov	er NickelBeryllium Cop	per, Gold
Contact Plating Spec.	50 μin min	imum	ASTM-B488 50μ in	. minimun
Dielectric Type	PTFE		PEI	
Outer Cond Material & Plati	ng		Passivated Stain	less Steel
Outer Cond Plating Spec.			SAE-AMS-2	700
Body Material & Plating	Passivated Stair	nless S	Steel Passivated Stain	less Steel
Body Plating Spec.	SAE-AMS-	2700	SAE-AMS-2	700
Coupling Nut Material & Pla	iting Passivated Stair	nless S	iteel	
Coupling Nut Plating Spec.	SAE-AMS-	2700		
Hex Size	3/4 inc	ch		
Torque	19 in-lbs 2.	15 Nn	n	

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020 REV 1.2 Page 2 of 4





How to Order

Part Number Configuration:	FMCA1289 - x	cx uu	
		<u> </u>	<pre>cm = Centimeters <black> = Inches</black></pre>
			— Length

Example: FMCA1289-12 = 12 inches long cable

FMCA1289-100cm = 100 cm long cable

Low Loss Test N Male to N Female Cable LL335i Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss Test N Male to N Female Cable LL335i Coax FMCA1289


URL: https://www.fairviewmicrowave.com/low-loss-test-n-male-n-female-cable-II335i-coax-fmca1289-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





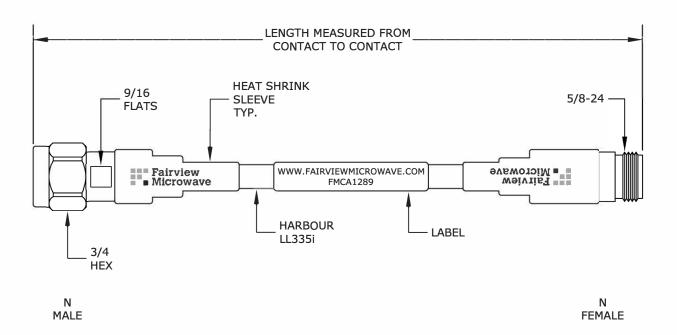

NOTE:

LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED . LONGER THAN 48" WILL BE 6" AWAY FROM CONNECTOR .

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Low Loss Test N Male to N Female Cable LL335i Coax	DWG NO FMCA1289			CAGE CODE 3FKR5		
	CAD FILE 122016	SHEET	SCAL	E N/A	SIZE A	2233