

FMCA1298 DATA SHEET

Low Loss Test RA SMA Male to N Female Cable LL335i Coax

The RA SMA male to type N female cable using LL335i coax, part number FMCA1298, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N cable assembly has a male to female gender configuration with 50 ohm flexible LL335i coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1298 SMA male to type N female cable assembly operates to 18 GHz. The right angle SMA interface on the LL335i cable allows for easier connections in tight spaces. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 95 dB. The FMCA1298 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All FMCA1298 cable assemblies are 100% continuity and RF tested to published specifications. Custom lengths are built to order and shipped same day.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.06	0.08	0.12	0.18	0.26	dB/ft
	0.2	0.26	0.39	0.59	0.85	dB/m
Insertion Loss (Typ.)	0.05	0.07	0.1	0.15	0.22	dB/ft
Power Handling (Max.)	0.16 1,800	0.23 1,200	0.33 900	0.49 650	0.72 400	dB/m W

Electrical Specification Notes:

Power handling values are calculated based on Cable properties. Power handling will vary based on the actual VSWR of the cable assembly. Insertion Loss does not include the loss of the connectors, insertion loss is estimated as .1dB per connector.



Configuration:

- SMA Male Right Angle
- N Female
- LL335i

Features:

- Max Frequency 18 GHz
- Shielding Effectivity > 95 dB
- 83% Phase Velocity
- Triple Shielded
- FEP Jacket
- 83% Velocity of Propagation
- Shielding effectiveness 95 Db
- Maximum VSWR is 1.40:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125°C
- Same day shipment of custom lengths
- 100% Continuity and RF tested

Applications:

- General Purpose
- Test & Measurement
- Laboratory Use
- General Purpose
- Test & Measurement
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tal: 1-800-715-4396 / (9

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Mechanical Specifications

Cable Assembly

Length* 0 in [0 mm]

Cable

Cable Type LL335i
Impedance 50 Ohms
Inner Conductor Type Solid

Inner Conductor Material and Plating Copper, Silver

Dielectric Type PTFE Number of Shields 3

Shield Layer 1 Silver Plated Copper Tape
Shield Layer 2 Aluminum Polyester

Shield Layer 3 Silver Plated Copper Wire

Jacket Material FEP, Green
Jacket Diameter 0.3 in [7.62 mm]

Repeated Minimum Bend Radius 1.5 in [38.1 mm]

Connectors

Description	Connector 1	L Connector	· 2
Туре	SMA Male	N Female	
Specification	MIL-STD-348	MIL-STD-34	18
Impedance	50 Ohms	50 Ohms	
Contact Material & Plating	Beryllium Copper,	Gold Beryllium Coppe	r, Gold
Contact Plating Spec.	ASTM-B488 50µ	In. ASTM-B488 50μ in.	minimum
Dielectric Type	PTFE	PEI	
Outer Cond Material & Plati	ing	Passivated Stainle	ss Steel
Outer Cond Plating Spec.		SAE-AMS-27	00
Body Material & Plating	Passivated Stainless	Steel Passivated Stainle	ss Steel
Body Plating Spec.	SAE-AMS-2700	SAE-AMS-27	00
Coupling Nut Material & Pla	nting Passivated Stainless	Steel	
Coupling Nut Plating Spec.	SAE-AMS-2700)	
Hex Size	5/16 Inch		
Torque	8 in-lbs 0.9 Nr	n	

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020 REV 1.0 Page 2 of 4





How to Order

Part Number Configuration:	FMCA1298	- xx	uu	
			<u> </u>	<pre>- cm = Centimeters <black> = Inches</black></pre>
				— Length

Example: FMCA1298-12 = 12 inches long cable

FMCA1298-100cm = 100 cm long cable

Low Loss Test RA SMA Male to N Female Cable LL335i Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss Test RA SMA Male to N Female Cable LL335i Coax FMCA1298


URL: https://www.fairviewmicrowave.com/low-loss-test-ra-sma-male-n-female-cable-II335i-coax-fmca1298-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





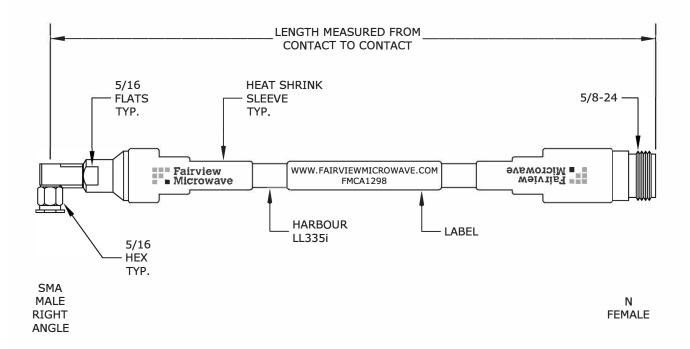

NOTE:

LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED . LONGER THAN 48" WILL BE 6" AWAY FROM CONNECTOR .

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Low Loss Test RA SMA Male to N Female Cable LL335i Coax	DWG NO FMCA1298			CAGE CODE 3FKR5		
	CAD FILE 122016	SHEET	SCALE	E N/A	SIZE A	2233