

Low Loss Test SMA Male to RA N Male Cable LL335i Coax

The SMA male to RA type N male cable using LL335i coax, part number FMCA1299, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible LL335i coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1299 SMA male to type N male cable assembly operates to 18 GHz. The right angle type N interface on the LL335i cable allows for easier connections in tight spaces. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 95 dB. The FMCA1299 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All FMCA1299 cable assemblies are 100% continuity and RF tested to published specifications. Custom lengths are built to order and shipped same day.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.06	0.08	0.12	0.18	0.26	dB/ft
	0.2	0.26	0.39	0.59	0.85	dB/m
Insertion Loss (Typ.)	0.05	0.07	0.1	0.15	0.22	dB/ft
	0.16	0.23	0.33	0.49	0.72	dB/m
Power Handling (Max.)	1,800	1,200	900	650	400	W

Electrical Specification Notes:

Power handling values are calculated based on Cable properties. Power handling will vary based on the actual VSWR of the cable assembly. Insertion Loss does not include the loss of the connectors, insertion loss is estimated as .1dB per connector.



FMCA1299



Configuration:

- SMA Male
- N Male Right Angle
- LL335i

Features:

- Max Frequency 18 GHz
- Shielding Effectivity > 95 dB
- 83% Phase Velocity
- Triple Shielded
- FEP Jacket
- 83% Velocity of Propagation
- Shielding effectiveness 95 Db
- Maximum VSWR is 1.40:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125°C
- Same day shipment of custom lengths
- 100% Continuity and RF tested

Applications:

- General Purpose
- Test & Measurement
- Laboratory Use
- General Purpose
- Test & Measurement
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



FMCA1299 DATA SHEET

Mechanical Specifications

Cable Assembly Length* Weight

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 Shield Layer 3 Jacket Material Jacket Diameter 0 in [0 mm] 0.28 lbs [127.01 g]

LL335i 50 Ohms Solid Copper, Silver PTFE 3 Silver Plated Copper Tape Aluminum Polyester Silver Plated Copper Wire FEP, Green 0.3 in [7.62 mm] 1.5 in [38.1 mm]

Repeated Minimum Bend Radius

Connectors

Description	Cor	Connector 1		Connector 2		
Туре	S	MA Male		N Male		
Specification	MIL	-STD-348				
Impedance	5	0 Ohms		50 Ohms	s	
Contact Material & Plating	Berylliu	<mark>m Cop</mark> per, G	old	Beryllium Coppe	er, Gold	
Contact Plating Spec.	ASTM-	•B488 50µ Ir	۱.	ASTM-B48	38	
Dielectric Type		PTFE		PTFE		
Body Material & Plating	Passivate	d Stainless S	Steel	Passivated Stainle	ess Steel	
Body Plating Spec.	SAE	-AMS-2700		SAE-AMS-2	700	
Coupling Nut Material & Pla	iting Passivate	d Stainless S	Steel	Passivated Stainle	ess Steel	
Coupling Nut Plating Spec.	SAE	-AMS-2700		SAE-AMS-2	700	
Hex Size	5,	/16 Inch				
Torque	8 in-	<mark>lbs 0.</mark> 9 Nm				

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





How to Order

Part Number Configuration:

FMCA1299 - xx



Example: FMCA1299-12 = 12 inches long cable FMCA1299-100 cm = 100 cm long cable

Low Loss Test SMA Male to RA N Male Cable LL335i Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss Test SMA Male to RA N Male Cable LL335i Coax FMCA1299


URL: https://www.fairviewmicrowave.com/low-loss-test-sma-male-ra-n-male-cable-II335i-coax-fmca1299-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





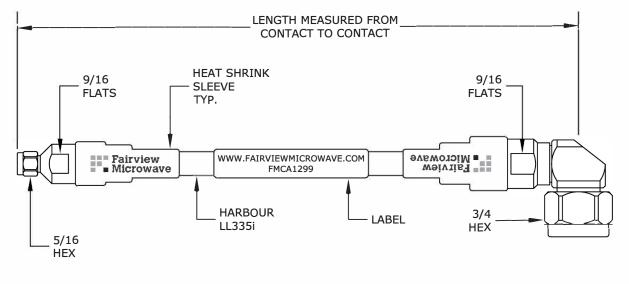

SMA MALE N MALE RIGHT ANGLE

NOTE:

LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED . LONGER THAN 48" WILL BE 6" AWAY FROM CONNECTOR .

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE Low Loss Test SMA Male to RA N Male Cable LL335i Coax	DWG NO FMCA1299			CAGE CODE 3FKR5		
	CAD FILE 122016	SHEET	SCAL	.e n/a	SIZE A	2233

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689