

FMCA1424-24 DATA SHEET

Snap-On RA MMBX Plug to N Female Bulkhead Cable RG316 Coax in 24 Inch

Fairview Microwave's MMBX cable assemblies are part of our full line of RF interconnects available for same-day shipping. These MMBX cable assemblies are designed for test applications or connection of your MMBX system components. With a high frequency range up to 3 GHz, this family of MMBX cables can also be used to connect your panels to PCB's with between series options like MMBX-to-SMA, MMBX-to-N or MMBX-to-TNC assemblies. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This MMBX cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many MMBX cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide an I/O for a board design or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

Min	Т	ур	Мах	Units
DC			3	GHz
			1.4:1	
	-15	5.56		dB
	6	59		%
			2,000	Vrms
		DC -15		DC 3 1.4:1 -15.56 69

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.42	0.54	0.68	0.96	1.36	dB

Mechanical Specifications

Cable Assembly Length*

Diameter

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Jacket Material Jacket Diameter 24 in [609.6 mm] 0.807 in [20.5 mm]

RG316 50 Ohms Stranded Copper Clad Steel, Silver PTFE 1 Silver Plated Copper Braid FEP, Tan 0.098 in [2.49 mm]



Configuration:

- Snap-On MMBX Plug Right Angle
- N Female Bulkhead
- RG316


Features:

- Max. Operating Frequency of 3 GHz
- Snap-On mating

Applications:

- General Purpose MMBX Test
- PCB Testing
- Low Profile MMBX Cable Jumpers
- PCB-to-Panel Connection

Cable Diagram:



Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

REV 1.0 Page 1 of 4 Copyright © 2017





Connectors

Description	Connector 1	Connector 2
Туре	MMBX Plug	N Female
Mount Method		Bulkhead
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Connection Method	Snap-On	
Mating Cycles	100	100
Contact Material & Plating	Beryllium Copper, Gol	ld Brass, Gold
Contact Plating Spec.		30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Cond Material & Plating	Brass, Gold	
Body Material & Plating	Brass, Gold	Brass, Nickel
Body Plating Spec.		100 µin minimum

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature **Operating Range**

-55 to +155 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMCA1424 - xx



Example: FMCA1424-12 = 12 inches long cable FMCA1424-100cm = 100 cm long cable






Snap-On RA MMBX Plug to N Female Bulkhead Cable RG316 Coax in 24 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Snap-On RA MMBX Plug to N Female Bulkhead Cable RG316 Coax in 24 Inch FMCA1424-24


URL: https://www.fairviewmicrowave.com/ra-mmbx-plug-n-female-cable-rg316u-coax-fmca1424-24-p.aspx

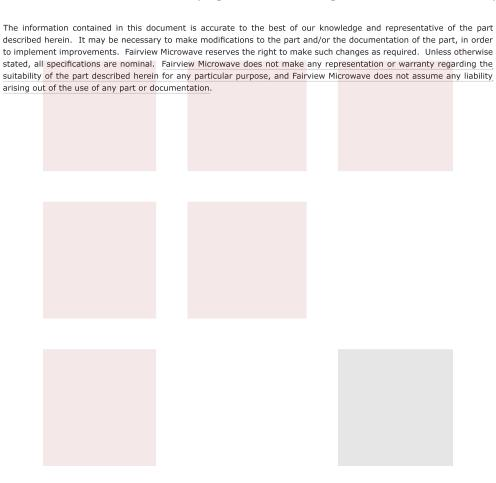

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





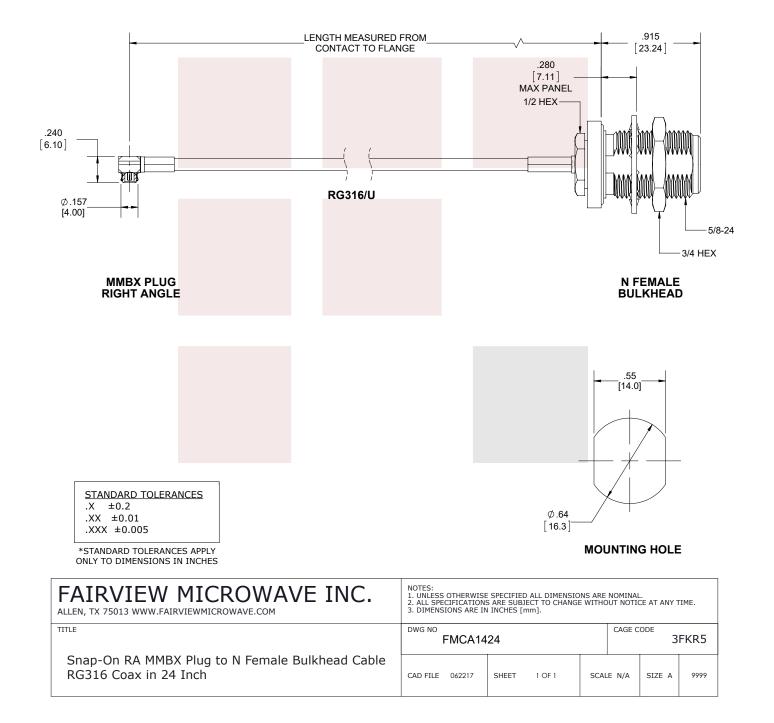

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689