

FMCA1447 DATA SHEET

Snap-On RA MMBX Plug to SMA Female Cable RG174 Coax

Fairview Microwave's MMBX cable assemblies are part of our full line of RF interconnects available for same-day shipping. These MMBX cable assemblies are designed for test applications or connection of your MMBX system components. With a high frequency range up to 3 GHz, this family of MMBX cables can also be used to connect your panels to PCB's with between series options like MMBX-to-SMA, MMBX-to-N or MMBX-to-TNC assemblies. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This MMBX cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many MMBX cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide an I/O for a board design or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

Min	Т	ур	Max	Units
DC			1,000	MHz
			1.4:1	
	-15	5.56		dB
	e	6		%
31.1 [102.03]			pF/ft [pF/m]	
	DC	DC -15	DC -15.56 66	DC 1,000 1.4:1 -15.56 66

Performance by Frequency

	-	-				
Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Max.)	0.06	0.08	0.14	0.22	0.32	dB/ft
	0.2	0.26	0.46	0.72	1.05	dB/m
						dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1dB per connector.

Mechanical Specifications

Cable Assembly Diameter

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields 0.312 in [7.92 mm]

RG174 50 Ohms Stranded Copper Clad Steel, Silver PE 1



Configuration:

- Snap-On MMBX Plug Right Angle
- SMA Female
- RG174


Features:

- Max. Operating Frequency of 1 GHz
- Snap-On mating

Applications:

- General Purpose MMBX Test
- PCB Testing
- Low Profile MMBX Cable Jumpers
- PCB-to-Panel Connection

Cable Diagram:



Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

REV 1.0 Page 1 of 4 Copyright © 2017





Shield	Layer 1
Jacket	Material
Jacket	Diameter

Tinned Copper Braid PVC, Black 0.11 in [2.79 mm]

Connectors

Description	Connector 1	Connector 2		
Туре	MMBX Plug	SMA Female		
Specification		MIL-STD-348		
Impedance	50 Ohms	50 Ohms		
Connection Method	Snap-On			
Mating Cycles	100	100		
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold		
Contact Plating Spec.		ASTM-B488		
Dielectric Type	PTFE	PTFE		
Outer Cond Material & Plati	ng Brass, Gold			
Body Material & Plating	Brass, Gold	Brass, Nickel		
Body Plating Spec.		ASTM-B689		

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8''$, whichever is greater.

. Ε

Environmental Specifi Temperature	cations			
Operating Range		-40 to +80 deg C		
Compliance Certificati	ons (see product pa	age for current docume	nt)	
Plotted and Other Dat Notes:	а			
How to Order				
Part Number Configura	tion:	FMCA1447 -	xx uu	
				cm = Centimeters <blank> = Inches</blank>
				— Length

Example: FMCA1447-12 = 12 inches long cable FMCA1447-100cm = 100 cm long cable






Snap-On RA MMBX Plug to SMA Female Cable RG174 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Snap-On RA MMBX Plug to SMA Female Cable RG174 Coax FMCA1447


URL: https://www.fairviewmicrowave.com/ra-mmbx-plug-sma-female-cable-rg174-coax-fmca1447-p.aspx

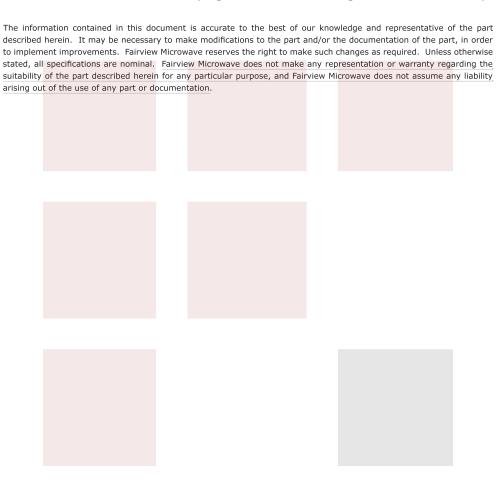





*

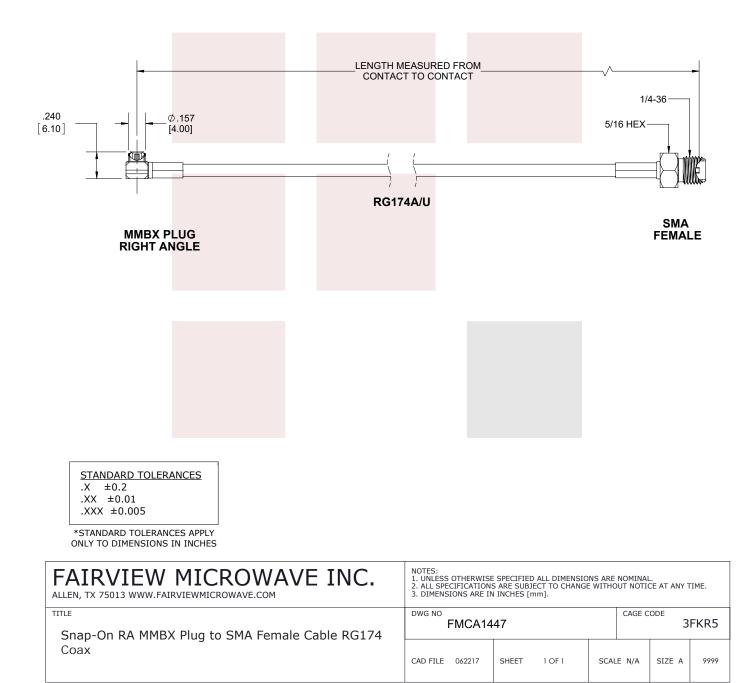

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689