

FMCA1469-72 DATA SHEET

SMA Female to RA SSMC Plug Cable RG316 Coax in 72 Inch

Fairview Microwave's SSMC cable assemblies are part of our full line of RF interconnects available for same-day shipping. These SSMC cable assemblies are designed for test applications or connection of your SSMC system components. With a high frequency range up to 12.4 GHz, this family of SSMC cables can also be used to connect your data acquisition system or SSMC connections on your A/D converters. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This SSMC cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many SSMC cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide low loss SSMC I/O for digital receivers or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

Min	Т	ур	Max	Units
DC			3	GHz
			1.6:1	
	6	59		%
			250	Vrms
			2,000	Vrms
		DC		DC 3 1.6:1 69 250

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.05	0.1	0.4	1	3	GHz
Insertion Loss (Typ.)	0.65	0.86	1.46	2.48	3.68	dB

Mechanical Specifications

Cable Assembly Length*

Diameter

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Jacket Material Jacket Diameter 72 in [182.88 cm] 0.312 in [7.92 mm]

RG316 50 Ohms Stranded Copper Clad Steel, Silver PTFE 1 Silver Plated Copper Braid FEP, Tan 0.098 in [2.49 mm]



Configuration:

- SMA Female
- SSMC Plug Right Angle
- RG316

Features:

- Reliable threaded SSMC cable connection
- Max. Operating Frequency of 3 GHz
- Small form factor (SSMC connection is 50% smaller than SMA)
- In stock and ready to ship

Applications:

- Software Defined Radio (SDR)
- Data acquisition systems with SSMC connections
- Digital Wideband Receivers
- SSMC patch panels
- A/D Conversion

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connector	1	Connector 2	
Туре	SMA Femal	е	SSMC Plug	
Specification	MIL-STD-34	8		
Impedance	50 Ohms		50 Ohms	
Mating Cycles	100		500	
Contact Material & Plating	Beryllium Copper	, Gold	Beryllium Copper, Gold	
Contact Plating Spec.	ASTM-B488	3	MIL-G-45204	
Dielectric Type	PTFE		Teflon	
Body Material & Plating	Brass, Nicke	el 🛛	Brass, Gold	
Body Plating Spec.	ASTM-B689)	MIL-G-45204	
Coupling Nut Material & Plat	ing		Beryllium Copper, Gold	
Coupling Nut Plating Spec.			MIL-G-45204	
Torque			1.75 in-lbs [0.2 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature **Operating Range**

-55 to +165 deg C

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMCA1469 - xx



Example: FMCA1469-12 = 12 inches long cable FMCA1469-100cm = 100 cm long cable






SMA Female to RA SSMC Plug Cable RG316 Coax in 72 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: SMA Female to RA SSMC Plug Cable RG316 Coax in 72 Inch FMCA1469-72

URL: https://www.fairviewmicrowave.com/sma-female-ra-ssmc-plug-cable-rg316u-coax-fmca1469-72-p.aspx

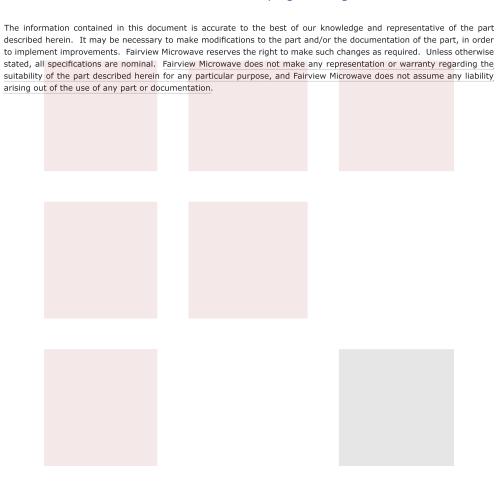





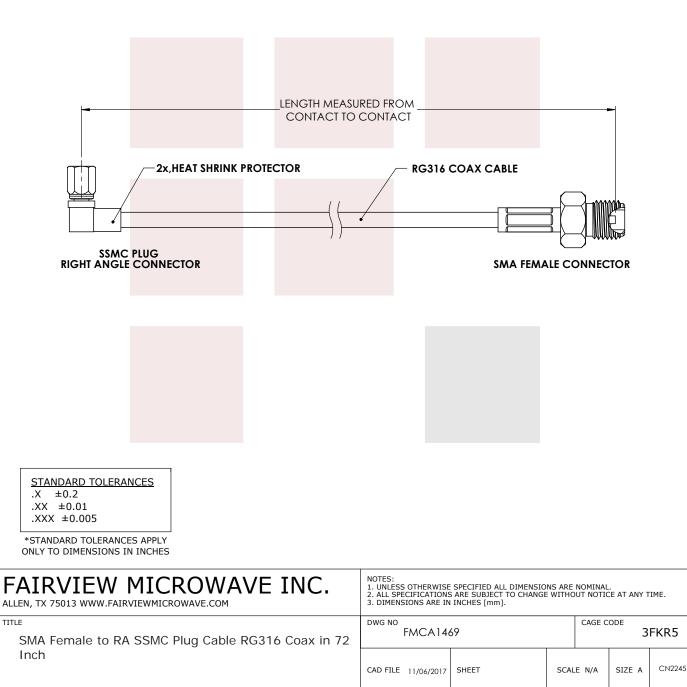

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689