



SMA Female Bulkhead to RA SSMC Plug Cable LMR-100 Coax

Fairview Microwave's SSMC cable assemblies are part of our full line of RF interconnects available for same-day shipping. These SSMC cable assemblies are designed for test applications or connection of your SSMC system components. With a high frequency range up to 12.4 GHz, this family of SSMC cables can also be used to connect your data acquisition system or SSMC connections on your A/D converters. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This SSMC cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many SSMC cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide low loss SSMC I/O for digital receivers or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

Description	Min	Т	ур	Max	ι	Jnits		
Frequency Range	DC			5.8		GHz		
VSWR				1.6:1				
Velocity of Propagation		6	66			%		
RF Shielding	90					dB		
Group Delay		1.54	[5.05]		ns/f	t [ns/m]		
Capacitance			30.8 [101.05]			pF/ft [pF/m]		
Inductance			0.077 [0.25]			uH/ft [uH/m]		
DC Resistance Inner Conductor			81 [265.75]			Ω/1000ft [Ω/Km]		
DC Resistance Outer Conductor			31.17]		Ω/100	Oft [Ω/Km]		
Jacket Spark				2,000	\	/rms		

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
						dB/m
Insertion Loss (Typ.)	0.12	0.17	0.24	0.4	0.64	dB/ft
	0.39	0.56	0.79	1.31	2.1	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Diameter

0.312 in [7.92 mm]



Configuration:

- SMA Female Bulkhead
- SSMC Plug Right Angle
- LMR-100A

Features:

- Reliable threaded SSMC cable connection
- Max. Operating Frequency of 5.8 GHz
- Small form factor (SSMC connection is 50% smaller than SMA)
- In stock and ready to ship

Applications:

- Software Defined Radio (SDR)
- Data acquisition systems with SSMC connections
- Digital Wideband Receivers
- · SSMC patch panels
- A/D Conversion

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Cable

Cable Type LMR-100A Impedance 50 Ohms Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel

Dielectric Type PE Number of Shields 2

Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid

Jacket Material PVC, Black

Jacket Diameter 0.11 in [2.79 mm]

One Time Minimum Bend Radius 0.25 in [6.35 mm]
Repeated Minimum Bend Radius 1 in [25.4 mm]

Bending Moment 0.1 lbs-ft [0.14 N-m]
Flat Plate Crush 10 lbs/in [0.18 Kg/mm]

Tensile Strength 15 lbs [6.8 Kg]

Connectors

Description	Connect	ctor 1 Connector 2					
Туре	SMA Fem	nale	SSMC Plug				
Mount Method	Bulkhea	ad					
Specification	MIL-STD-	348					
Impedance	50 Ohn	าร	50 Ohms				
Mating Cycles			500				
Contact Material & Plating	Gold		Beryllium Copper, Gold				
Contact Plating Spec.	MIL-G-45	204	MIL-G-45204				
Dielectric Type		Teflon					
Body Material & Plating Brass, N			ickel Brass, Gold				
Body Plating Spec.	QQ-N-29	90	MIL-G-45204				
Coupling Nut Material & Plating			Beryllium Copper, Gold				
Coupling Nut Plating Spec.		MIL-G-45204					
Torque		1.75 in-lbs [0.2 Nm					

Mechanical Specification Notes:

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMCA1488 - xx uu

cm = Centimeters
<black> = Inches

Length

Example: FMCA1488-12 = 12 inches long cable

FMCA1488-100cm = 100 cm long cable

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.





SMA Female Bulkhead to RA SSMC Plug Cable LMR-100 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Female Bulkhead to RA SSMC Plug Cable LMR-100 Coax FMCA1488


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/sma-female-ra-ssmc-plug-cable-lmr100-coax-fmca1488-p.aspx

to implem	nent improvem	ents. Fairview	Microw	ave reserv	es the righ	nt to mal	ke such	changes	as req	uired. l	Inless	otherwise
stated, al	l specifications	are nominal.	Fairvie	w Microwa	ve does n	ot make	any re	presentat	ion or	warrant	y rega	arding the
suitability	of the part de	escribed hereir	for any	particular	purpose,	and Fai	rview M	1icrowave	does i	not assu	ıme aı	ny liability
arising ou	t of the use of	any part or do	cument	ation.								





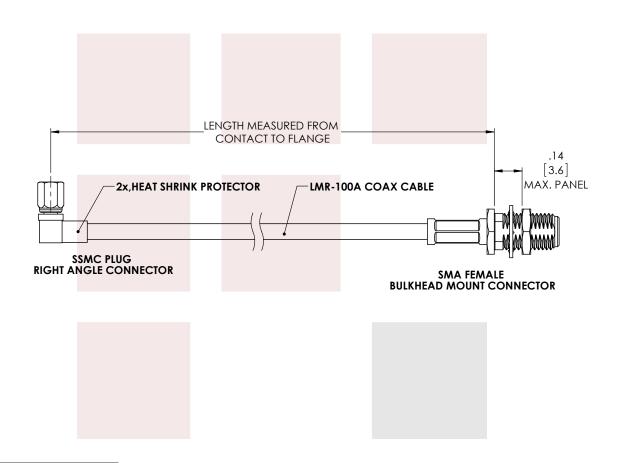

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
SMA Female Bulkhead to RA SSMC Plug Cable LMR-	DWG NO FMCA1488				CAGE CODE 3FKR5		
100 Coax	CAD FILE 11/06/2017	SHEET	SCAL	E N/A	SIZE A	CN2245	