

FMCA1505-48 DATA SHEET

SSMC Plug to SSMC Jack Bulkhead Cable FM-SR086TBJ Coax in 48 Inch

Fairview Microwave's SSMC cable assemblies are part of our full line of RF interconnects available for same-day shipping. These SSMC cable assemblies are designed for test applications or connection of your SSMC system components. With a high frequency range up to 12.4 GHz, this family of SSMC cables can also be used to connect your data acquisition system or SSMC connections on your A/D converters. There are hundreds of possible cable assembly configurations to choose from, all available same day.

This SSMC cable assembly datasheet PDF contains specifications, CAD drawing and dimensions that are shown below. Fairview Microwave not only has many SSMC cable assembly options, but also a wide selection of RF, microwave and millimeter wave cable assemblies which allows RF designers to customize their configurations to whatever is required. Whether the need is to provide low loss SSMC I/O for digital receivers or simply create a custom cable assembly configuration, Fairview Microwave has the right cable assemblies for the job. Fairview can also expertly build your custom RF cable assemblies for you and ship same day.

Electrical Specifications

| Description | Min | Typ Max | | Units | | |
|-------------------------------|-------------------------|-------------|---------------|--------------|-----------------|------|
| Frequency Range | DC | | | 12.4 | | GHz |
| VSWR | | | | 1.4:1 | | |
| Velocity of Propagation | | 69.5 | | | % | |
| RF Shielding | 100 | | | | | dB |
| Group Delay | | 1.43 [4.69] | | ns/ft [ns/m] | | |
| Capacitance | | | 29 [95.14] | | pF/ft [pF/m] | |
| DC Resistance Inner Conductor | | | 65.7 [215.55] | | Ω/1000ft [Ω/Km] | |
| DC Resistance Outer Cor | istance Outer Conductor | | 10.2 [33.46] | | Ω/1000ft [Ω/Km] | |
| Operating Voltage (AC) | | | | 250 | V | /rms |

| Performance by Frequency |
|--------------------------|
|--------------------------|

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-----|-----|-----|------|------|-------|
| Frequency | 0.5 | 1 | 5 | 10 | 12.4 | GHz |
| Insertion Loss (Max.) | 0.8 | 1.1 | 2.4 | 3.45 | 3.84 | dB |

Mechanical Specifications

Cable Assembly

Length* Diameter

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Outer Conductor Material and Plating 48 in [121.92 cm] 0.156 in [3.96 mm]

FM-SR086TBJ 50 Ohms Solid Copper Clad Steel, Silver PTFE 1 Tinned Copper Composite Braid



Configuration:

- SSMC Plug
- SSMC Jack Bulkhead
- FM-SR086TBJ

Features:

- Reliable threaded SSMC cable connection
- Max. Operating Frequency of 12.4 GHz
- Small form factor (SSMC connection is 50% smaller than SMA)
- In stock and ready to ship

Applications:

- Software Defined Radio (SDR)
- Data acquisition systems with SSMC connections
- Digital Wideband Receivers
- SSMC patch panels
- A/D Conversion

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





| Jacket Material | FEP, Black |
|------------------------------|---------------------|
| Jacket Diameter | 0.105 in [2.67 mm] |
| One Time Minimum Bend Radius | 0.5 in [12.7 mm] |
| Repeated Minimum Bend Radius | 0.787 in [19.99 mm] |

Connectors

| Description | Connecto | Connector 1 | | Connector 2 | | |
|-----------------------------|----------------------|-------------------------|------------------|------------------------|--|--|
| Туре | SSMC PI | ug | SSMC Jack | | | |
| Mount Method | | | Bulkhead | d | | |
| Impedance | 50 Ohm | าร | 50 Ohm | S | | |
| Mating Cycles | 500 | | 500 | | | |
| Contact Material & Plating | Beryllium Copp | per, G <mark>old</mark> | l Beryllium Copp | er, Go <mark>ld</mark> | | |
| Contact Plating Spec. | MIL-G-452 | 204 | MIL-G-452 | 04 | | |
| Dielectric Type | Teflon | | Teflon | | | |
| Outer Cond Material & Plati | ng | | Beryllium Copp | er, Go <mark>ld</mark> | | |
| Outer Cond Plating Spec. | | | MIL-G-452 | 04 | | |
| Body Material & Plating | Beryllium Copp | per, Gold | l Beryllium Copp | er, Gold | | |
| Body Plating Spec. | MIL-G-452 | 204 | MIL-G-452 | 04 | | |
| Coupling Nut Material & Pla | iting Beryllium Copp | per, G <mark>old</mark> | | | | |
| Coupling Nut Plating Spec. | MIL-G-452 | 204 | | | | |
| Torque | 1.75 in-lbs [0 |).2 N <mark>m]</mark> | 1.75 in-lbs [0 | 2 Nm] | | |
| | | | | | | |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

| Tempera | ture |
|-----------|-------|
| Operating | Range |

-55 to +125 deg C


Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

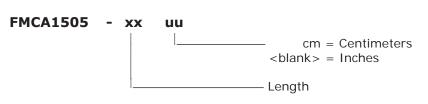

Example: FMCA1505-12 = 12 inches long cable FMCA1505-100cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689






SSMC Plug to SSMC Jack Bulkhead Cable FM-SR086TBJ Coax in 48 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SSMC Plug to SSMC Jack Bulkhead Cable FM-SR086TBJ Coax in 48 Inch FMCA1505-48


URL: https://www.fairviewmicrowave.com/ssmc-plug-ssmc-jack-cable-rg405-type-.086-coax-fmca1505-48-p.aspx

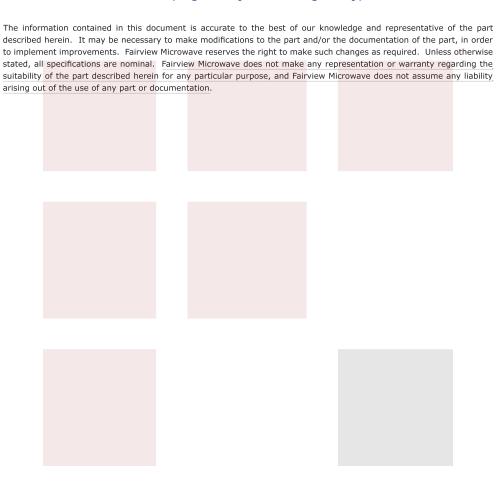

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





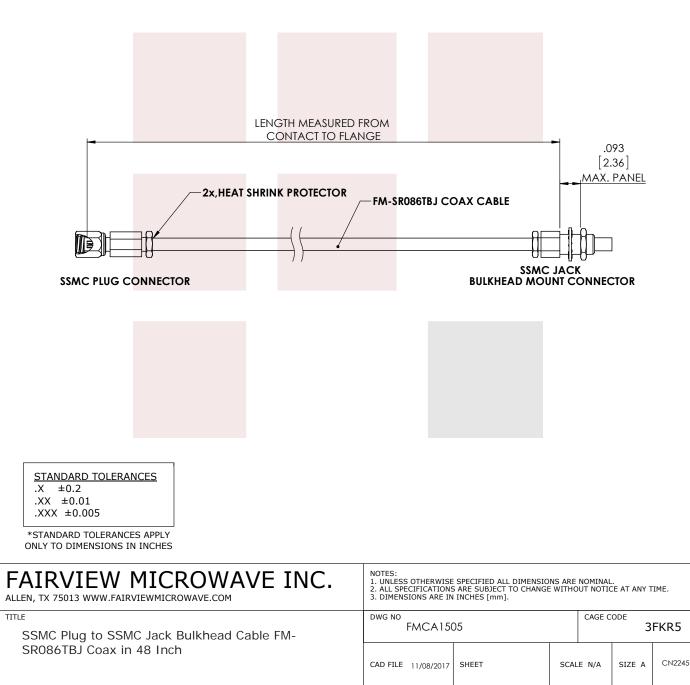

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689