

FMCA1659 DATA SHEET

Slide-On BMA Plug Bulkhead to N Male Cable RG-316 Coax

The BMA plug slide-on bulkhead to type N male cable using RG-316 coax, part number FMCA1659, from Fairview Microwave is in-stock and ships same day. This Fairview BMA to type N cable assembly has a plug to male gender configuration with 50 ohm flexible RG316 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1659 BMA plug to type N male cable assembly operates to 3 GHz. Our RF cable assembly with BMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | Тур | Max | Units |
|-------------------------|-----|-----|-------|-------|
| Frequency Range | DC | | 3 | GHz |
| VSWR | | | 1.4:1 | |
| Return Loss | | | 15.56 | dB |
| Velocity of Propagation | | 69 | | % |
| Operating Voltage (AC) | | | 250 | Vrms |
| Jacket Spark | | | 2,000 | Vrms |
| | | | | |

AIT VIEW MICROWAVE

Configuration:

- Slide-On BMA Plug Bulkhead
- N Male
- RG316

Features:

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

Applications:

- General Purpose
- Laboratory Use
- Rack and Panel
- BMA Cable RF Backplanes
- Phased Array Interconnects
- High Speed Switching Networks
- Blind Mate BMA Test

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 3 | GHz |
| Insertion Loss (Typ.) | 0.11 | 0.15 | 0.27 | 0.38 | 0.58 | dB/ft |
| | 0.36 | 0.49 | 0.89 | 1.25 | 1.9 | dB/m |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly Diameter

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 0.8 in [20.32 mm]

RG316 50 Ohms Stranded Copper Clad Steel, Silver PTFE 1 Silver Plated Copper Braid Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Jacket Material Jacket Diameter FEP, Tan 0.098 in [2.49 mm]

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------|--------------------------|---------------------|
| Туре | BMA Plug | N Male |
| Mount Method | Bulkhead | |
| Specification | | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Connection Method | Slide-On | |
| Contact Material & Plating | Beryllium Copper, | Gold Brass, Gold |
| Contact Plating Spec. | 51.18µ in. minim | um 30 µin minimum |
| Dielectric Type | PTFE | PTFE |
| Outer Cond Material & Plati | ing Passivated Stainless | Steel |
| Body Material & Plating | Passivated Stainless | Steel Brass, Nickel |
| Body Plating Spec. | | 100 µin minimum |
| Coupling Nut Material & Pla | ating | Brass, Nickel |
| Coupling Nut Plating Spec. | | 100 µin minimum |
| Hex Size | 8 mm | |
| | | |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:





Typical Performance Data

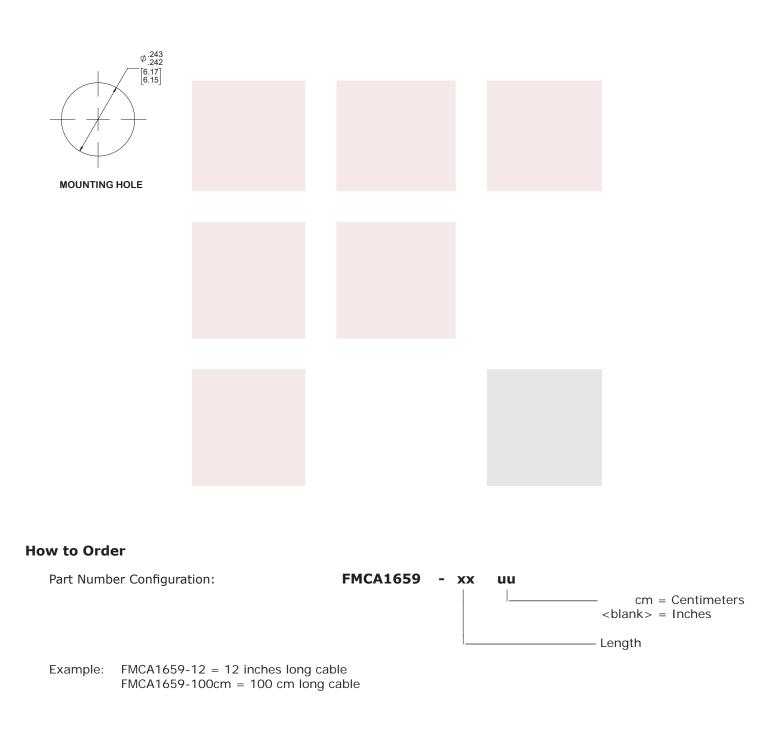

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





Slide-On BMA Plug Bulkhead to N Male Cable RG-316 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: Slide-On BMA Plug Bulkhead to N Male Cable RG-316 Coax FMCA1659

URL: https://www.fairviewmicrowave.com/bma-plug-n-male-cable-rg316-coax-fmca1659-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave necessary to make any representation or warraty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





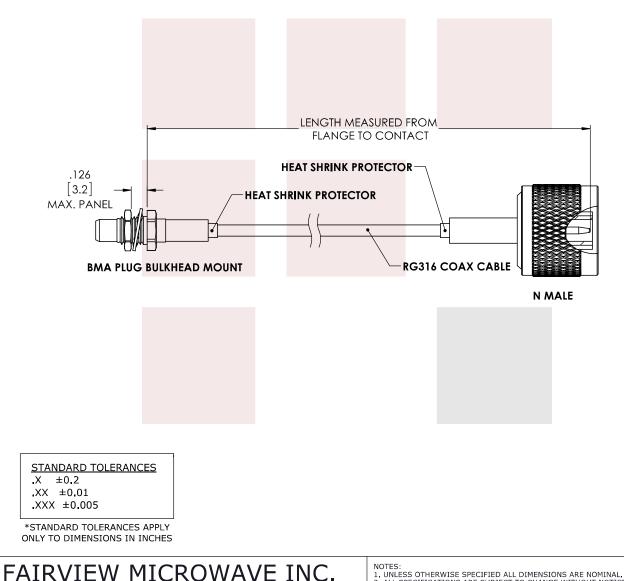

| ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | |
|--|-----------------------------------|-------|------|-----------------|--------|--|
| TLE Slide-On BMA Plug Bulkhead to N Male Cable RG-316 Coax | dwg no FMCA1659 | | | CAGE CODE 3FKR5 | | |
| COUX | CAD FILE 01/02/18 | SHEET | SCAL | .e n/a size a | CN2245 | |

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689