

NEX10 Male to NEX10 Male Low PIM Cable  
12 Inch Length Using TFT-5G-402 Coax Using  
Times Microwave Components



**FMCA2353-12**

**Configuration**

- Connector 1: NEX10 Male
- Connector 2: NEX10 Male
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

**Features**

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket
- 100 Mating Cycles

**Applications**

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

**Description**

The NEX10 male to NEX10 male 12 inch cable using TFT-5G-402 coax, part number FMCA2353-12, from Fairview Microwave is in-stock and ships same day. This Fairview NEX10 to NEX10 cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. Our low PIM design offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The FMCA2353-12 NEX10 male to NEX10 male cable assembly operates to 5.8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-160	dBc
IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz				

NEX10 Male to NEX10 Male Low PIM Cable  
12 Inch Length Using TFT-5G-402 Coax Using  
Times Microwave Components



**FMCA2353-12**

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Capacitance		26.7 [87.6]		pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.17	0.23	0.31	0.52	0.79	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1\*SQRT(FGHz) dB per connector.

**Mechanical Specifications**

**Cable Assembly**

Length	12 in [304.8 mm]
Width/Diameter	0.472 in [11.99 mm]

**Cable**

Cable Type	TFT-5G-402
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Number of Shields	2
Jacket Material	FEP, Blue
Jacket Diameter	0.16 in [4.06 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]

NEX10 Male to NEX10 Male Low PIM Cable  
12 Inch Length Using TFT-5G-402 Coax Using  
Times Microwave Components



**FMCA2353-12**

**Connectors**

Description	Connector 1	Connector 2
Type	NEX10 Male	NEX10 Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	100	100
Contact Material and Plating	Brass, Silver	Brass, Silver
Contact Plating Specification	100 µin	100 µin
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Silver
Body Plating Specification	100 µin	100 µin
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 µin	100 µin
Torque	9 in-lbs 1.02 Nm	9 in-lbs 1.02 Nm

**Environmental Specifications**

Operating Range Temperature -40 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

NEX10 Male to NEX10 Male Low PIM Cable  
12 Inch Length Using TFT-5G-402 Coax Using  
Times Microwave Components




**FMCA2353-12**

**Typical Performance Data**

**How to Order**

Part Number Configuration:

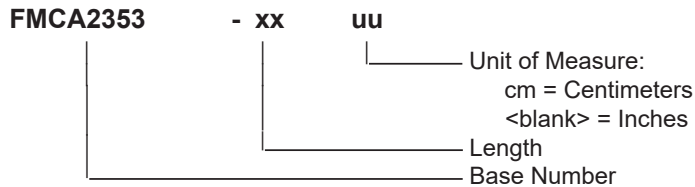

Example: FMCA2353-12 = 12 inches long cable  
FMCA2353-100cm = 100 cm long cable

NEX10 Male to NEX10 Male Low PIM Cable 12 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [NEX10 Male to NEX10 Male Low PIM Cable 12 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components FMCA2353-12](https://www.fairviewmicrowave.com/low-pim-nex10-male-to-nex10-male-cable-tft-5g-402-coax-in-12-inch-using-times-microwave-components-fmca2353-12)

URL: <https://www.fairviewmicrowave.com/low-pim-nex10-male-to-nex10-male-cable-tft-5g-402-coax-in-12-inch-using-times-microwave-components-fmca2353-12-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCA2353-12 CAD Drawing

NEX10 Male to NEX10 Male Low PIM Cable 12 Inch Length Using TFT-5G-402 Coax Using Times Microwave Components

