

FMCA2363 DATA SHEET

Low PIM 2.2-5 Male to RA 4.3-10 Male Cable 1/4 inch Superflexible Coax

The 2.2-5 male to RA 4.3-10 male cable using 1/4 inch superflexible coax, part number FMCA2363, from Fairview Microwave is in-stock and ships same day. This Fairview 2.2-5 to 4.3-10 cable assembly has a male to male gender configuration with 50 ohm corrugated 1/4" superflexible coax. Fairview Microwave's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. Our low PIM design offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The FMCA2363 2.2-5 male to 4.3-10 male cable assembly operates to 6 GHz. The right angle 4.3-10 interface on the 1/4" Superflexible cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур	Max	U	Inits
Frequency Range	DC			6		GHz
VSWR				1.4:1		
Velocity of Propagation		3	32			%
RF Shielding	120					dB
Passive Intermodulation				-160		dBc

Capacitance		24.4 [80.05]	pF/ft [pF/m]
Inductance		0.059 [0.19]	uH/ft [uH/m]
DC Resistance Inner Cor	nductor	3.2 [10.5]	Ω/1000ft [Ω/Km]
DC Resistance Outer Cor	nductor	2.53 [8.3]	Ω/1000ft [Ω/Km]
Jacket Spark		2,000	Vrms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.01	0.02	0.03	0.05	0.1	dB/ft
	0.03	0.07	0.1	0.16	0.33	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.25dB connector loss.

Mechanical Specifications

Cable Assembly

CableCable Type
Impedance

1/4" Superflexible 50 Ohms



Configuration:

- 2.2-5 Male
- 4.3-10 Male Right Angle
- 1/4" Superflexible

Features:

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

Applications:

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- PIM Testing

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Inner Conductor Type

Inner Conductor Material and Plating

Dielectric Type Number of Shields

Shield Layer 1

Jacket Material

Jacket Diameter

One Time Minimum Bend Radius Repeated Minimum Bend Radius

Typical Flex Cycles

Tensile Strength

Solid

Copper Clad Aluminum

PE (F) 1

Helically Corrugated Copper Tube

PE, Black

0.303 in [7.7 mm]

0.5 in [12.7 mm] 1 in [25.4 mm]

20

79 lbs [35.83 Kg]

Connectors

Description	Connector 1	Connector 2
Туре	2.2-5 Male	4.3-10 Male
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material & Pla	ting Brass, Tri-Metal	Brass, Tri-Metal

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMCA2363 - xx uu | cm = Centimeters | chlank> = Inches | Length

Example: FMCA2363-12 = 12 inches long cable

FMCA2363-100cm = 100 cm long cable





Low PIM 2.2-5 Male to RA 4.3-10 Male Cable 1/4 inch Superflexible Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low PIM 2.2-5 Male to RA 4.3-10 Male Cable 1/4 inch Superflexible Coax FMCA2363


URL: https://www.fairviewmicrowave.com/low-pim-2.2-5-male-ra-4.3-10-male-cable-fm-1-4-sfhc-coax-fmca2363-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

to implem	ent improven	nents. Fairview	Microw	ave reserv	es the righ	nt to mak	ke such	changes	as req	uired. l	Jnless (otherwise
stated, al	l specification	s are nominal.	Fairvie	w Microwa	ve does n	ot make	any re	presentat	ion or	warrant	y rega	rding the
suitability	of the part d	lescribed hereir	for any	particular	purpose,	and Fair	rview M	licrowave	does	not assu	ıme an	y liability
arising ou	t of the use o	of any part or do	cument	ation.								





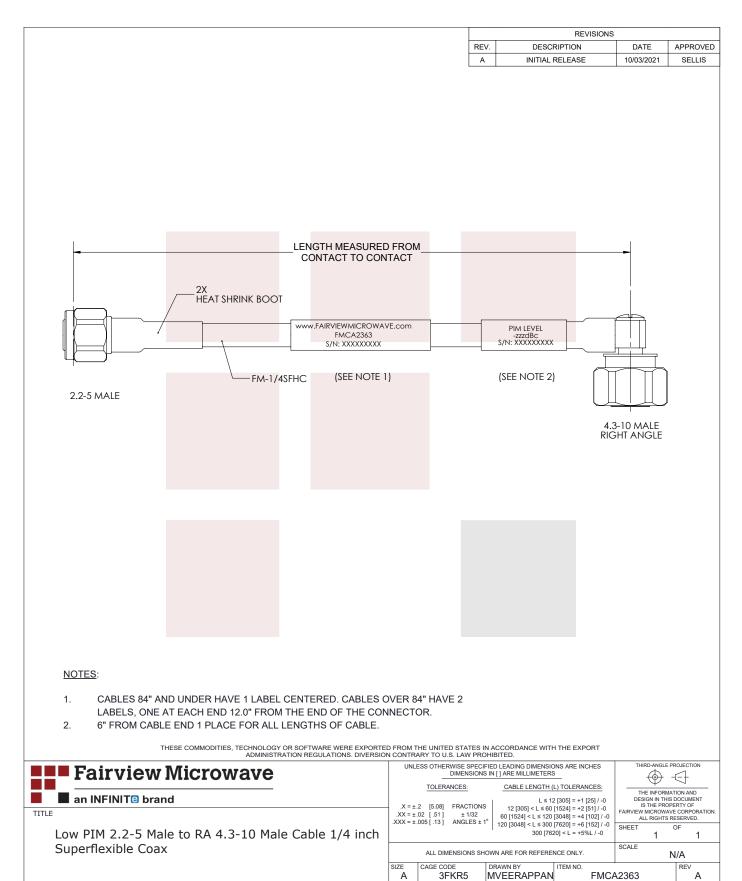

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689