

FMCA2367-100CM DATA SHEET

Low PIM 2.2-5 Female to 4.3-10 Male Cable 1/4 inch Superflexible Coax in 100 CM

The 2.2-5 female to 4.3-10 male 100 cm cable using 1/4 inch superflexible coax, part number FMCA2367-100CM, from Fairview Microwave is in-stock and ships same day. This Fairview 2.2-5 to 4.3-10 cable assembly has a female to male gender configuration with 50 ohm corrugated 1/4" superflexible coax. Fairview Microwave's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. Our low PIM design offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The FMCA2367-100CM 2.2-5 female to 4.3-10 male cable assembly operates to 6 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

-						
Description	Min	Т	ур	Мах	ι	Jnits
Frequency Range	DC			6		GHz
VSWR				1.4:1		
Velocity of Propagation		8	32			%
RF Shielding	120					dB
Passive Intermodulation				-160		dBc
Capacitance		24.4	[80.05]]	pF/f	t [pF/m]
Inductance		0.059	[0.19]		uH/f	t [uH/m]
DC Resistance Inner Cor	ductor	3.2	[10.5]		Ω/100	0ft [Ω/Km]
DC Resistance Outer Cor	nductor	2.53	8 [8.3]		Ω/100	0ft [Ω/Km]
Jacket Spark				2,000	١	/rms

Performance by	Freque	ncy				
Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.24	0.27	0.3	0.37	0.53	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector loss.

Mechanical Specifications

Cable Assembly

Length* Diameter 39.37 in [100 cm] 0.94 in [23.88 mm]



Configuration:

- 2.2-5 Female
- 4.3-10 Male
- 1/4" Superflexible

Features:

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

Applications:

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- PIM Testing

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave






Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Jacket Material
Jacket Diameter

One Time Minimum Bend Radius Repeated Minimum Bend Radius Typical Flex Cycles Tensile Strength

Connectors

Description	Connector 1	Connector 2		
Туре	2.2-5 Female	4.3-10 Ma	4.3-10 Male	
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Bronze, Silver	Brass, Silver		
Dielectric Type	PTFE	PTFE		
Outer Cond Material & Plat	ing Bronze, Silver			
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-M	etal	
Coupling Nut Material & Pla	ating	Brass, Tri-M	etal	
			-	

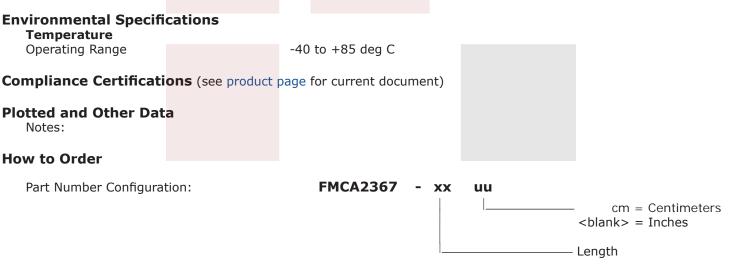

1/4" Superflexible

Copper Clad Aluminum

0.303 in [7.7 mm]

0.5 in [12.7 mm]

79 lbs [35.83 Kg]

1 in [25.4 mm]

Helically Corrugated Copper Tube

50 Ohms Solid

PE, Black

PE (F) 1

20

Example: FMCA2367-12 = 12 inches long cable FMCA2367-100 cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689






Low PIM 2.2-5 Female to 4.3-10 Male Cable 1/4 inch Superflexible Coax in 100 CM from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low PIM 2.2-5 Female to 4.3-10 Male Cable 1/4 inch Superflexible Coax in 100 CM FMCA2367-100CM


URL: https://www.fairviewmicrowave.com/low-pim-2.2-5-female-4.3-10-male-cable-fm-1-4-sfhc-coax-fmca2367-100cmp.aspx

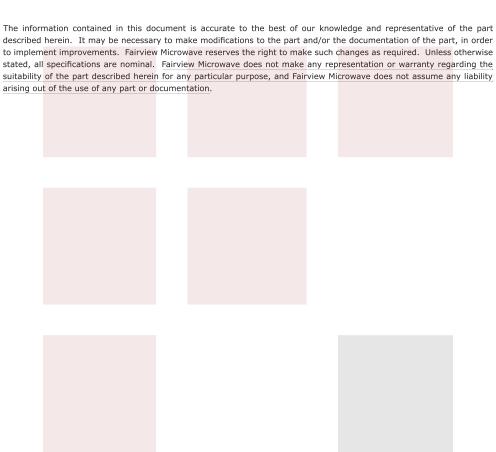

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

an INFINIT© brand



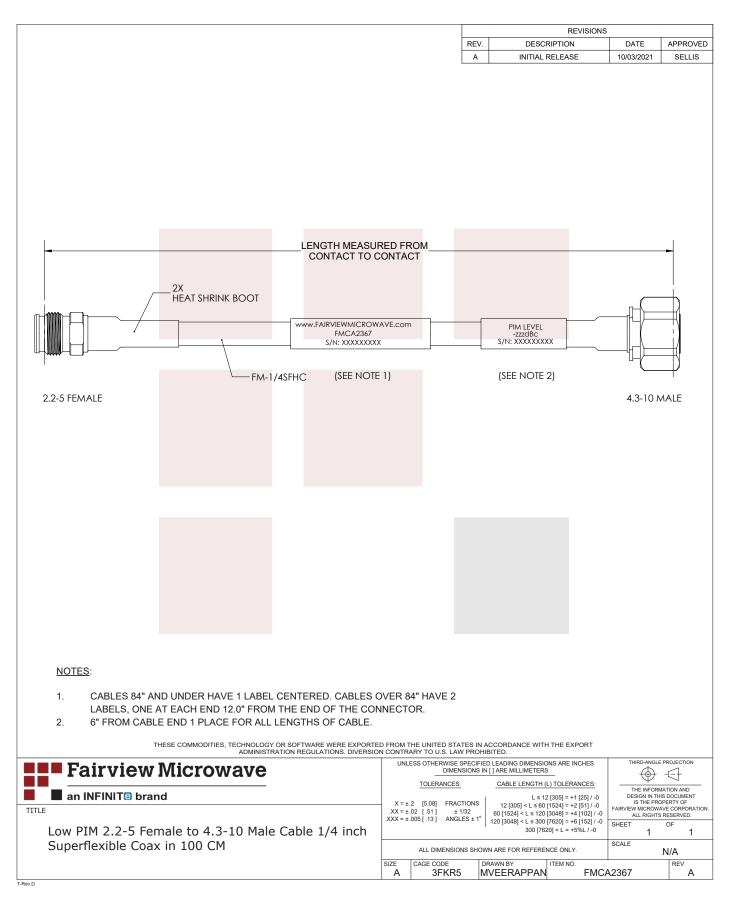

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689