

Low PIM 4.1/9.5 Mini DIN Female to 7/16 DIN Male Cable TFT-402-LF Coax Using Times Microwave Components

The 4.1/9.5 Mini DIN female to 7/16 DIN male cable using TFT-402-LF coax, part number FMCA2468, from Fairview Microwave is in-stock and ships same day. This Fairview 4.1/9.5 Mini DIN to 7/16 DIN cable assembly has a female to male gender configuration with 50 ohm flexible TFT-402-LF coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. Our low PIM design offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The FMCA2468 4.1/9.5 Mini DIN female to 7/16 DIN male cable assembly operates to 5.8 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | Typ | Max | Units |
|-------------------------|-----|-------------|-------|--------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 76 | | % |
| RF Shielding | 80 | | | dB |
| Passive Intermodulation | | | -160 | dBc |
| Capacitance | | 26.7 [87.6] | | pF/ft [pF/m] |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|-------|-------|------|-------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Typ.) | 0.057 | 0.083 | 0.117 | 0.19 | 0.295 | dB/ft |
| | 0.19 | 0.27 | 0.38 | 0.62 | 0.97 | dB/m |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as $0.1 \cdot \sqrt{\text{FGHz}}$ dB for the female connector and 0.1 dB for the male connector.

Mechanical Specifications

Cable Assembly

Diameter 1.25 in [31.75 mm]

Cable

Cable Type TFT-402-LF
 Impedance 50 Ohms
 Inner Conductor Type Solid



Configuration:

- 4.1/9.5 Mini DIN Female
- 7/16 DIN Male
- TFT-402-LF

Features:

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

Applications:

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

| | |
|--------------------------------------|--------------------|
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PTFE |
| Number of Shields | 2 |
| Jacket Material | FEP, Blue |
| Jacket Diameter | 0.16 in [4.06 mm] |
| One Time Minimum Bend Radius | 0.75 in [19.05 mm] |

Connectors

| Description | Connector 1 | Connector 2 |
|---------------------------------|-------------------------|------------------------|
| Type | 4.1/9.5 Mini DIN Female | 7/16 DIN Male |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | 500 | |
| Contact Material & Plating | Phosphor Bronze, Silver | Brass, Silver |
| Contact Plating Spec. | 200 µin | 5 µm |
| Dielectric Type | PTFE | PTFE |
| Outer Cond Material & Plating | Brass, Tri-Metal | |
| Outer Cond Plating Spec. | 80 µin | |
| Body Material & Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Spec. | 80 µin | 3 µm |
| Coupling Nut Material & Plating | | Brass, Tri-Metal |
| Coupling Nut Plating Spec. | | 3 µm |
| Torque | | 22.083 ft-lbs 29.95 Nm |

Environmental Specifications
Temperature

Operating Range -55 to +85 deg C


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

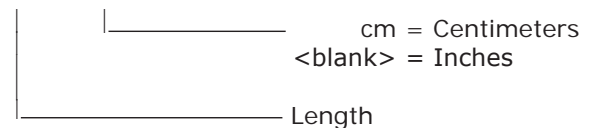FMCA2468 - xx uu

 Example: FMCA2468-12 = 12 inches long cable
 FMCA2468-100cm = 100 cm long cable

Low PIM 4.1/9.5 Mini DIN Female to 7/16 DIN Male Cable TFT-402-LF Coax Using Times Microwave Components from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: [Low PIM 4.1/9.5 Mini DIN Female to 7/16 DIN Male Cable TFT-402-LF Coax Using Times Microwave Components FMCA2468](#)

URL: <https://www.fairviewmicrowave.com/low-pim-4.1-9.5-mini-din-female-7-16-din-male-cable-tft-402-lf-coax-fm-ca2468-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



| REVISIONS | | | |
|-----------|-----------------|------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 06/04/2021 | AGANWANI |

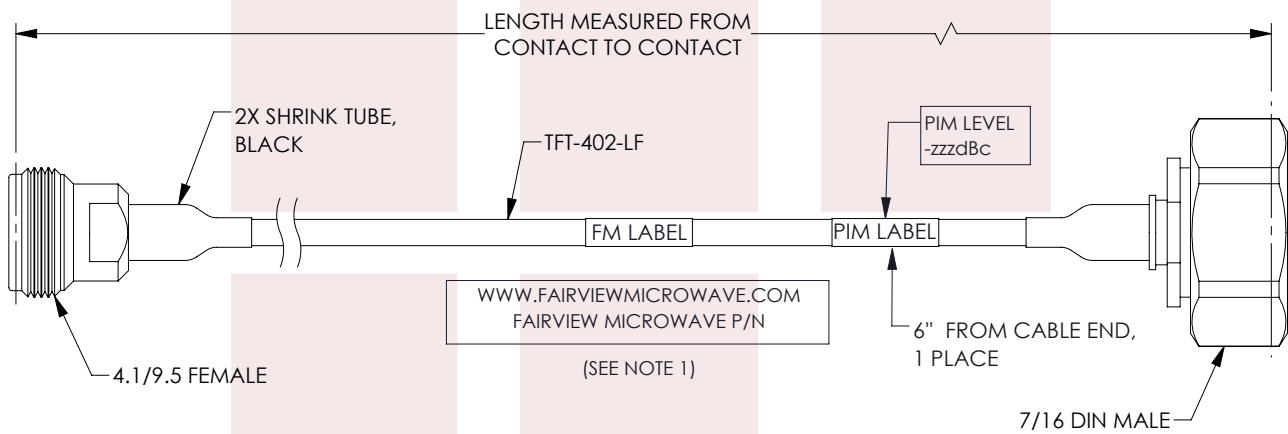

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | | | | | | |
|--|--|---------------|--|----------------------------|--------------------------|--------------|
| <p>Fairview Microwave an INFINIT® brand</p> | <p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES: CABLE LENGTH (L) TOLERANCES:</p> <p>.X = ±.2 [.508] FRACTIONS L ≤ 12 [305] = +1 [25] / -0 .XX = ±.02 [.51] ± 1/32 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 .XXX = ±.005 [.13] ANGLES ± 1° 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0</p> | | <p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.</p> | | | |
| | <p>TITLE</p> <p>Low PIM 4.1/9.5 Mini DIN Female to 7/16 DIN Male Cable TFT-402-LF Coax Using Times Microwave Components</p> | | <p>SHEET 1 OF 1</p> <p>SCALE N/A</p> | | | |
| <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> | | <p>SIZE A</p> | <p>CAGE CODE 3FKR5</p> | <p>DRAWN BY MVEERAPPAN</p> | <p>ITEM NO. FMCA2468</p> | <p>REV A</p> |

T-Rev.D