

N Male to Reverse Polarity SMA Male Cable in 100 CM Length Using RG223 Coax

The type N male to RP SMA male cable using RG223 coax, part number FMCA2785-100CM, from Fairview Microwave is in-stock and ships same day. This Fairview type N to reverse polarity SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | Typ | Max | Units |
|-------------------------|-----|---------------|-----|--------------|
| Velocity of Propagation | | 66 | | % |
| Capacitance | | 30.8 [101.05] | | pF/ft [pF/m] |

Mechanical Specifications

Cable Assembly

| | |
|---------|----------------------|
| Length* | 39.37 in [100 cm] |
| Weight | 0.1478 lbs [67.04 g] |

Cable

| | |
|--------------------------------------|----------------------------|
| Cable Type | RG223 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper, Silver |
| Dielectric Type | PE |
| Number of Shields | 2 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Shield Layer 2 | Silver Plated Copper Braid |
| Jacket Material | PVC, Black |
| Jacket Diameter | 0.209 in [5.31 mm] |

| | |
|------------------------------|----------------|
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |
|------------------------------|----------------|



Configuration:

- N Male
- SMA Male Reverse Polarity
- RG223

Features:

- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Connectors

| Description | Connector 1 | Connector 2 |
|---------------------------------|------------------|------------------|
| Type | N Male | SMA Male |
| Polarity | | Reverse Polarity |
| Specification | MIL-STD-348A | MIL-STD-348 |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material & Plating | Brass, Gold | Gold |
| Contact Plating Spec. | 30 µin | MIL-G-45204 |
| Dielectric Type | PTFE | PTFE |
| Body Material & Plating | Brass, Tri-Metal | Brass, Nickel |
| Body Plating Spec. | | QQ-N-290 |
| Coupling Nut Material & Plating | Brass, Tri-Metal | Brass, Nickel |
| Coupling Nut Plating Spec. | | QQ-N-290 |
| Hex Size | 18 mm | 5/16 inch |
| Torque | 9 in-lbs 1.02 Nm | 3 in-lbs 0.34 Nm |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMCA2785 - xx uu

cm = Centimeters
<blank> = Inches
Length

Example: FMCA2785-12 = 12 inches long cable
FMCA2785-100cm = 100 cm long cable


N Male to Reverse Polarity SMA Male Cable in 100 CM Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [N Male to Reverse Polarity SMA Male Cable in 100 CM Length Using RG223 Coax FMCA2785-100CM](#)

URL: <https://www.fairviewmicrowave.com/n-male-to-rp-sma-male-cable-rg223-coax-in-100-cm-fmca2785-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

| REVISIONS | | | |
|-----------|-----------------|------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 02/21/2022 | AGANWANI |

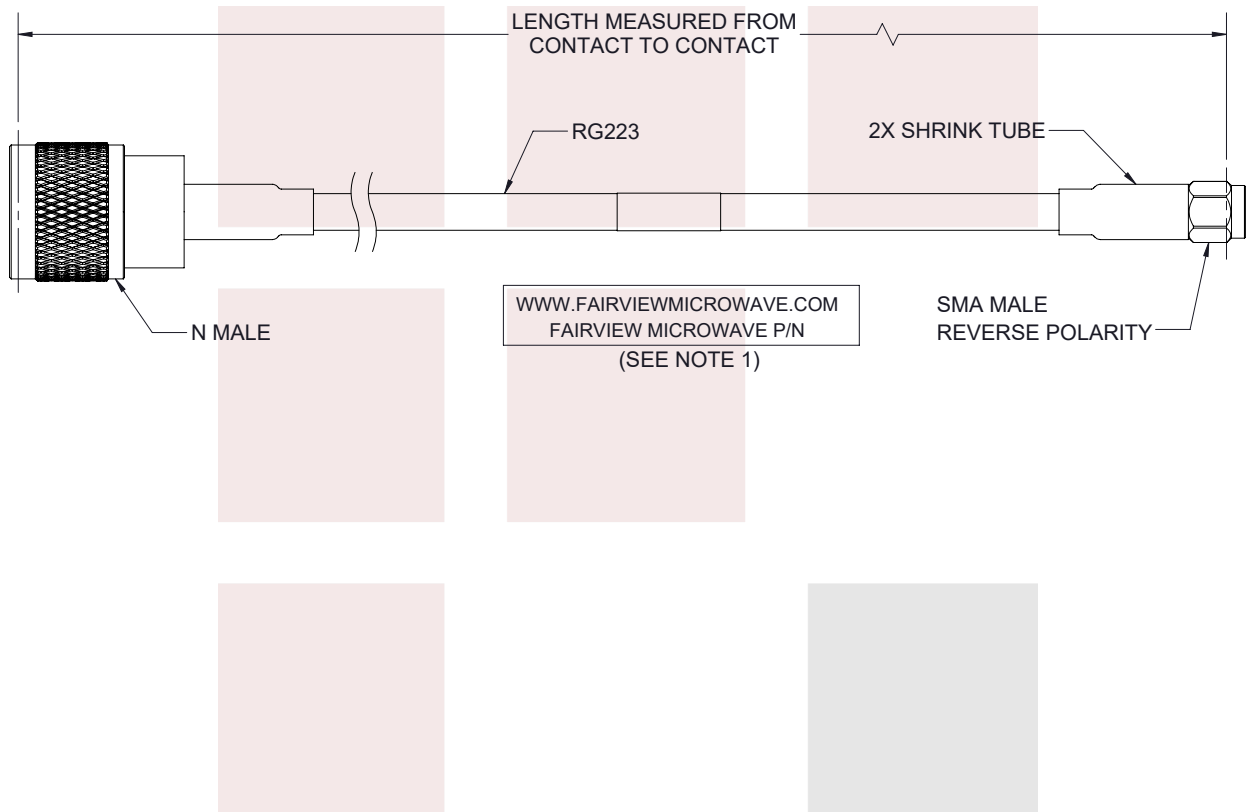

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END
6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | | | | | |
|---|---|---------------------|--|-------|--|
| <p>Fairview Microwave an INFINIT[®] brand</p> | <p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> | | <p>THIRD-ANGLE PROJECTION</p> | | |
| | <p>TOLERANCES:</p> <p>.X = ±.2 [.508] FRACTIONS ± 1/32</p> <p>.XX = ±.02 [.51] ANGLES ± 1°</p> <p>.XXX = ±.005 [.13]</p> | | <p>CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] = +1 [25] / -0</p> <p>12 [305] < L ≤ 60 [1524] = +2 [51] / -0</p> <p>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] < L = +5%L / -0</p> | | <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> |
| <p>TITLE</p> <p>N Male to Reverse Polarity SMA Male Cable in 100 CM Length Using RG223 Coax</p> | | | <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> <p>SCALE N/A</p> | | |
| SIZE A | CAGE CODE 3FKR5 | DRAWN BY MVEERAPPAN | ITEM NO. FMCA2785 | REV A | |

T-Rev.D