

N Male to N Female Bulkhead Cable RG402 Type .141 Coax in 200 CM

The type N male to type N female bulkhead 200 cm cable using RG402 type .141 coax, part number FMCA2810-200CM, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to female gender configuration with 50 ohm semi-rigid FM-SR141CU-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2810-200CM type N male to type N female cable assembly operates to 11 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур Мах	Units
Frequency Range	DC		11	GHz
VSWR			1.5:1	
Capacitance		29.9	[98.1]	pF/ft [pF/m]

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2.5	5	11		GHz
Insertion Loss (Typ.)	0.99	1.35	1.95	3.2		dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length* 78.74 in [200 cm] Weight 0.37 lbs [167.83 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1

FM-SR141CU-STR 50 Ohms Solid Copper Clad Steel, Silver PTFE 1 Copper

FMCA2810-200CM DATA SHEET



Configuration:

- N Male
- N Female Bulkhead
- FM-SR141CU-STR

Features:

• Max Frequency 11 GHz

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connector 1	Connector 2				
Туре	N Male	N Female				
Mount Method		Bulkhead				
Specification	MIL-STD-348A	MIL-STD-348A				
Impedance	50 Ohms	50 Ohms				
Contact Material & Plating	Brass, Gold	Beryllium Copper, Gold				
Contact Plating Spec.	30μ in. minimum	30μ in. minimum				
Dielectric Type	Teflon	Teflon				
Outer Cond Material & Plati	ing	Brass, Gold				
Outer Cond Plating Spec.		30μ in. minimum				
Body Material & Plating	Brass, Gold	Passivated Stainless Steel				
Body Plating Spec.	30μ in. minimum					
Coupling Nut Material & Pla	ting Brass, Nickel					
Coupling Nut Plating Spec.	100 μ in. minimum					

Environmental Specifications

TemperatureOperating Range


-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

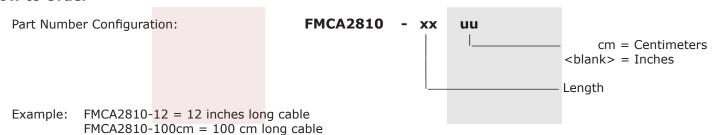

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





N Male to N Female Bulkhead Cable RG402 Type .141 Coax in 200 CM from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Male to N Female Bulkhead Cable RG402 Type .141 Coax in 200 CM FMCA2810-200CM

URL: https://www.fairviewmicrowave.com/n-male-to-n-female-bulkhead-cable-rg402-type-.141-coax-fmca2810-200cm-p. aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

	ient improvements. Fairviev										
stated, all	specifications are nominal.	Fairvie	w Microwa	ve does n	ot make	any rep	resentat	ion or v	warranty re	gard	ling the
suitability	of the part described herei	n for any	/ particular	purpose,	and Fair	view M	icrowave	does n	ot assume	any	liability
arising ou	t of the use of any part or d	ocument	ation.								

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





