

FMCA2943-100CM DATA SHEET

RA N Male to N Female Bulkhead Cable RG405 Type .086 Coax in 100 CM

The RA type N male to type N female bulkhead 100 cm cable using RG405 type .086 coax, part number FMCA2943-100CM, from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N cable assembly has a male to female gender configuration with 50 ohm semi-rigid FM-SR086CU-STR coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2943-100CM type N male to type N female cable assembly operates to 11 GHz. The right angle type N interface on the FM-SR086CU-STR cable allows for easier connections in tight spaces. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | Т | ур | Мах | U | Inits |
|-------------------------|------|--------|--------|-------|-------|----------|
| Frequency Range | DC | | | 11 | | GHz |
| VSWR | | | | 1.5:1 | | |
| Velocity of Propagation | | 69 | 9.5 | | | % |
| RF Shielding | -110 | | | | | dB |
| Capacitance | | 29.4 [| 96.46] | | pF/fl | t [pF/m] |
| | | | | | | |

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|----|-------|
| Frequency | 1 | 2.5 | 5 | 11 | | GHz |
| Insertion Loss (Typ.) | 1.03 | 1.34 | 1.87 | 3.06 | | dB |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly Length* Weight

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating 39.37 in [100 cm] 0.202 lbs [91.63 g]

FM-SR086CU-STR 50 Ohms Solid Copper Clad Steel, Silver



Configuration:

- N Male Right Angle
- N Female Bulkhead
- FM-SR086CU-STR

Features:

- Max Frequency 11 GHz
- Shielding Effectivity > -110 dB
- 69.5% Phase Velocity

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave

an INFINIT[®] brand



| Dielectric Type | PTFE |
|--------------------------------------|--------|
| Number of Shields | 1 |
| Outer Conductor Material and Plating | Copper |

| Repeated Minimum Bend Radius | 0.05 in [1.27 mm] |
|------------------------------|-------------------|
|------------------------------|-------------------|

Connectors


| Description | Connector 1 | Connector 2 | | |
|-----------------------------|--------------------|----------------------------------|--|--|
| Туре | N Male | N Female | | |
| Mount Method | | Bulkhead | | |
| Impedance | 50 Ohms | 50 Ohms | | |
| Contact Material & Plating | Brass, Gold | Phosphor Bronze, Gold over Nicke | | |
| Dielectric Type | PTFE | PTFE | | |
| Body Material & Plating | Brass, Nickel | Brass, Nickel | | |
| Coupling Nut Material & Pla | ting Brass, Nickel | | | |
| | | | | |

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

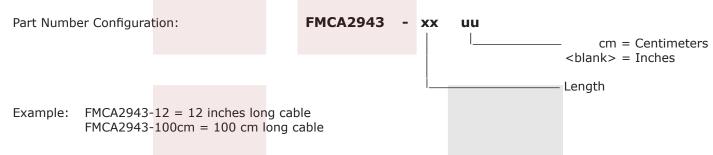

RA N Male to N Female Bulkhead Cable RG405 Type .086 Coax in 100 CM from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: RA N Male to N Female Bulkhead Cable RG405 Type .086 Coax in 100 CM FMCA2943-100CM


URL: https://www.fairviewmicrowave.com/ra-n-male-to-n-female-bulkhead-cable-rg405-type-.086-coaxfmca2943-100cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

Fairview Microwave



an INFINIT[®] brand

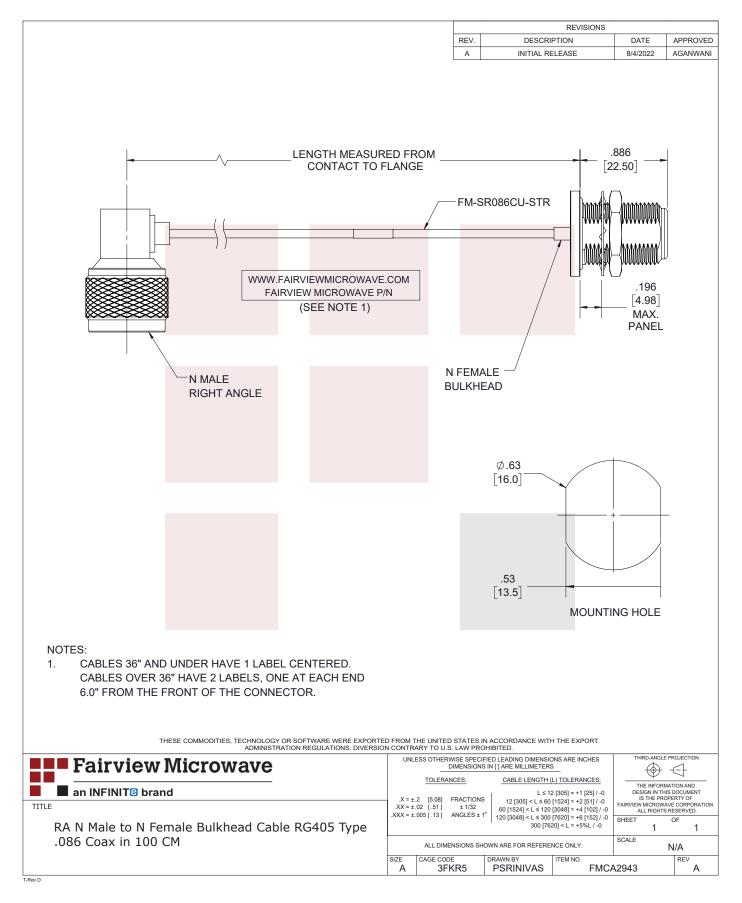

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689