

# FMCA3162 DATA SHEET

# SHV Jack to SHV Jack Bulkhead Cable RG223 Coax

The SHV jack to SHV jack bulkhead cable using RG223 coax, part number FMCA3162, from Fairview Microwave is in-stock and ships same day. This Fairview SHV to SHV cable assembly has a jack to jack gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA3162 SHV jack to SHV jack cable assembly operates to 300 MHz. Our RF cable assembly with SHV bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness. Safety high voltage connectors are designed to allow signal transmission with high voltage ratings without safety risk for the operators. Both the pin and socket contacts are securely recessed inside the insulation to guard against potential electrical shock when live unmated connectors are handled.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### **Electrical Specifications**

Description	Min	Тур	Мах	Units
Frequency Range	DC		300	MHz
Velocity of Propagation		%		
Capacitance		pF/ft [pF/m]		
Operating Voltage (AC)			1,900	Vrms

Performance by	Freq <mark>ue</mark>					
Description	F1	F2	F3	F4	F5	Units
Frequency	100	250	300			MHz
Insertion Loss (Typ.)	0.04	0.061	0.068			dB/ft
	0.13	0.2	0.22			dB/m

**Electrical Specification Notes:** 

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

### **Mechanical Specifications**

**Cable Assembly** Length\* Weight

#### Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating 0 in [0 mm] 0.29 lbs [131.54 g]

RG223 50 Ohms Solid Copper, Silver



# **Configuration:**

- SHV Jack
- SHV Jack Bulkhead
- RG223

### **Features:**

- Max Frequency 300 MHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket
- Dielectric withstanding of 5kV
- Shock, Moisture & Corrosion resistant
- Recessed contacts prevent shock hazards

## **Applications:**

- General Purpose
- Laboratory Use
- Nuclear Instrumentation
- High Voltage Electrical Transmission
- Semiconductor Test

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com Fairview Microwave



FMCA3162 DATA SHEET

Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter PE 2 Silver Plated Copper Braid Silver Plated Copper Braid PVC, Black 0.209 in [5.31 mm]

Repeated Minimum Bend Radius

1 in [25.4 mm]

#### Connectors

Description	Connector	r 1	Connector 2		
Туре	SHV Jack	¢ 🗌	SHV Jack		
Mount Method			Bulkhead		
Specification	MIL-STD-34	18B	MIL-STD-348B		
Impedance	50 Ohms	5	50 Ohms		
Contact Material & Plating	Brass, Gold over Nicke	el over	copperBrass, Gold over Nic	kel	
Dielectric Type	Teflon		Teflon		
Body Material & Plating	Brass, Tinned C	Copper	Brass, Tinned Coppe	r	
Coupling Nut Material & Pla	iting		Brass, Tinned Coppe	r	
Hex Size			7/16 Inch		

Environmental Specifi Temperature Operating Range	cations	-40	) to +80 deg C			
Ingress Protection (IP)	Rating	IP6	7 Rated			
Compliance Certificati	<b>ons</b> (see product p	bage	for current docume	ent)		
Plotted and Other Dat Notes:	a					
How to Order						
Part Number Configura	tion:		FMCA3162 -	xx	uu	
						cm = Centimeters <blank> = Inches</blank>
				I		Length

Example: FMCA3162-12 = 12 inches long cable FMCA3162-100cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





SHV Jack to SHV Jack Bulkhead Cable RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: SHV Jack to SHV Jack Bulkhead Cable RG223 Coax FMCA3162

The information contained in this document is accurate to the best of our knowledge and representative of the part

URL: https://www.fairviewmicrowave.com/shv-jack-to-shv-jack-bulkhead-cable-rg223-coax-fmca3162-p.aspx

described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



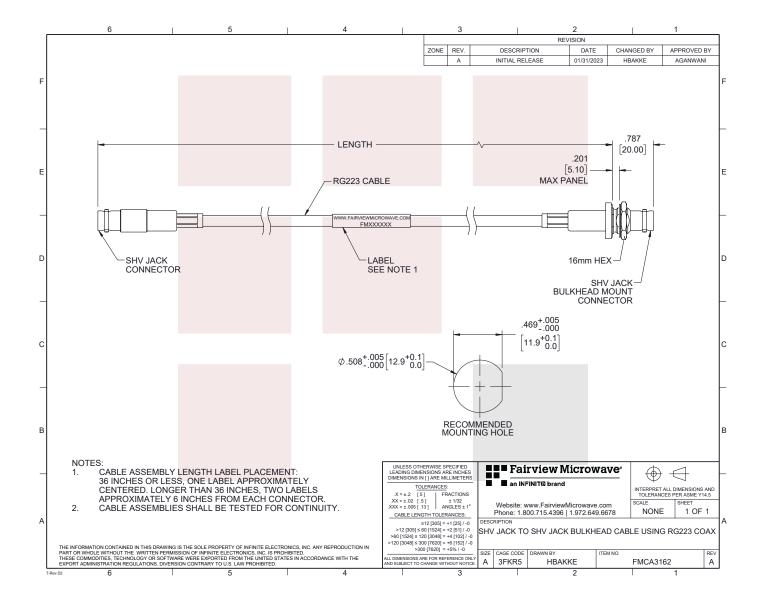

**FMCA3162** 

**DATA SHEET** 

SHV Jack to SHV Jack Bulkhead Cable RG223 Coax

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689