

**SMA Female PCB Connector End Launch Clamp/
Solder (Captive Contact) Attachment Microstrip/
Coplanar Launch, 0.005 inch**

SMA female connector with clamp/solder (captive contact) attachment for end launch PCB, part number FMCN1490, from Fairview Microwave is in-stock and ships same day. This SMA female connector operates up to a maximum frequency of 26.5 GHz and offers excellent VSWR of 1.2:1.

Fairview's SMA female connector FMCN1490 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		26.5	GHz
VSWR			1.2:1	

Electrical Specification Notes:
Actual VSWR performance is largely dependent on circuit board design. For optimal results, the connector and circuit launch geometry should be modeled using Electromagnetic Simulation tools.

Mechanical Specifications

Size	
Length	0.561 in [14.25 mm]
Width/Dia.	0.469 in [11.91 mm]
Weight	0.01 lbs [4.54 g]
Mating Cycles	500 Cycles

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Outer Conductor	Passivated Stainless Steel	
Body	Passivated Stainless Steel	

Mechanical Specification Notes:
Launch Pin is Gold Plated Beryllium Copper



Configuration:

- SMA Female Connector
- 50 Ohms
- Straight Body Geometry
- End Launch Interface Type
- Clamp/Solder (Captive Contact) Attachment

Features:

- Operating Frequency of 26.5 GHz Max.
- Excellent VSWR of 1.2:1
- Gold Plated Beryllium Copper Contact
- Optimized for 5 mil Du5880

Applications:

- General Purpose Test
- PCB Applications
- Signal Integrity Measurement
- Chip Evaluations
- SERDES
- End Launch Test Fixtures
- Microstrip Launches
- CPW Launches

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Environmental Specifications

Temperature

Operating Range -40 to +125 deg C


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Assembly Instruction


STEP 1 :
 Insert end launch connector (including ground block & screws) in the edge position of substrate.

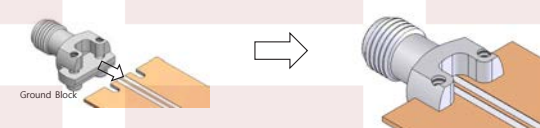


STEP 2:
 Tighten ground block against the substrate using two screws while ensuring flat pin is centered on the trace.

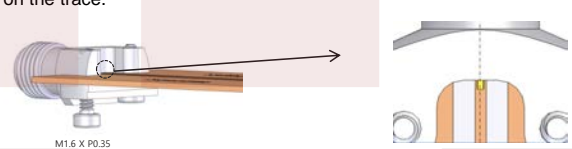

STEP 3:
 Solder the flat pin to center trace on substrate while the connector is held in the correct position.
 (Note: solder should flow along the length of the exposed flat pin for good electrical performance)





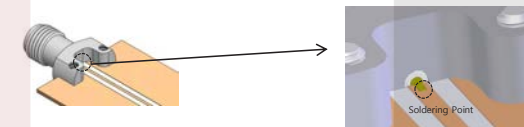


STEP 4:
 Remove any excess solder and clean all flux and other residues from the trace.




(Substrate shown for assembly instruction purposes only)


TYPICAL PCB GEOMETRY
 SUBSTRATE THICKNESS: 0.005"
 MICROSTRIP WIDTH: 0.014"
 SUBSTRATE MATERIAL: Du5880

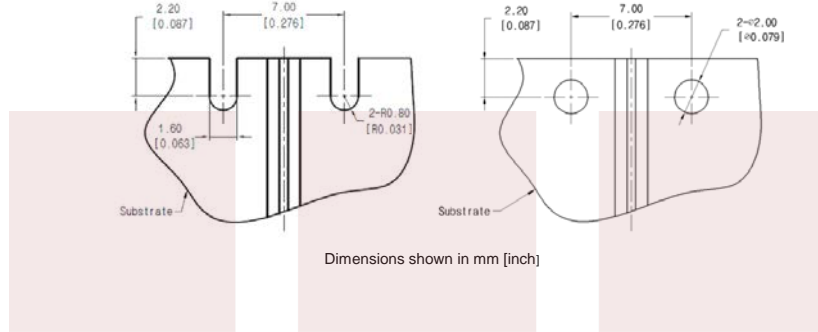

Typical Performance Data

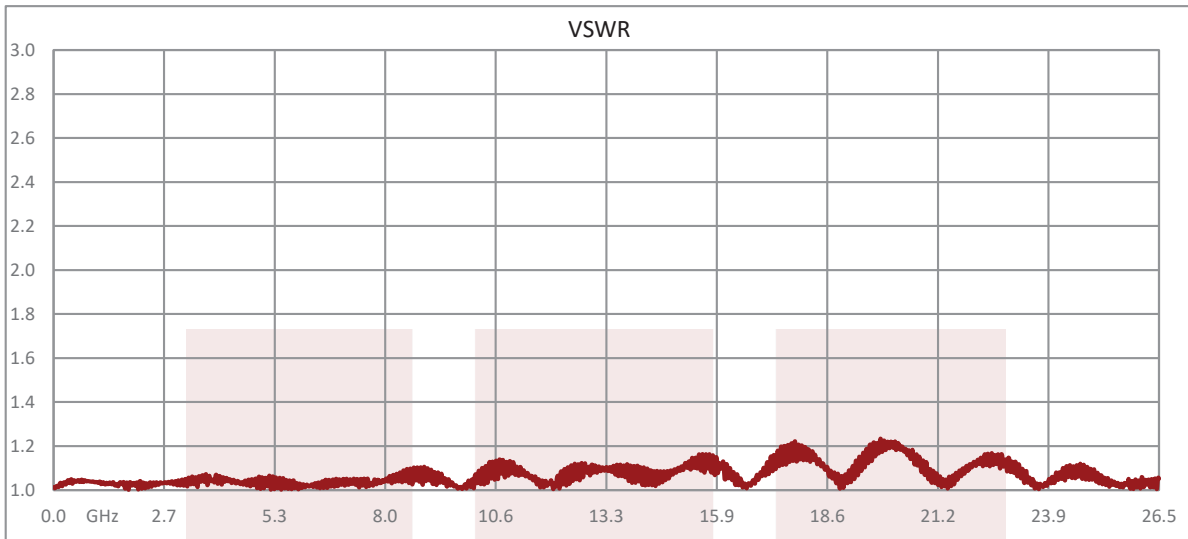

Test data taken with 2 connectors on both ends of test fixture

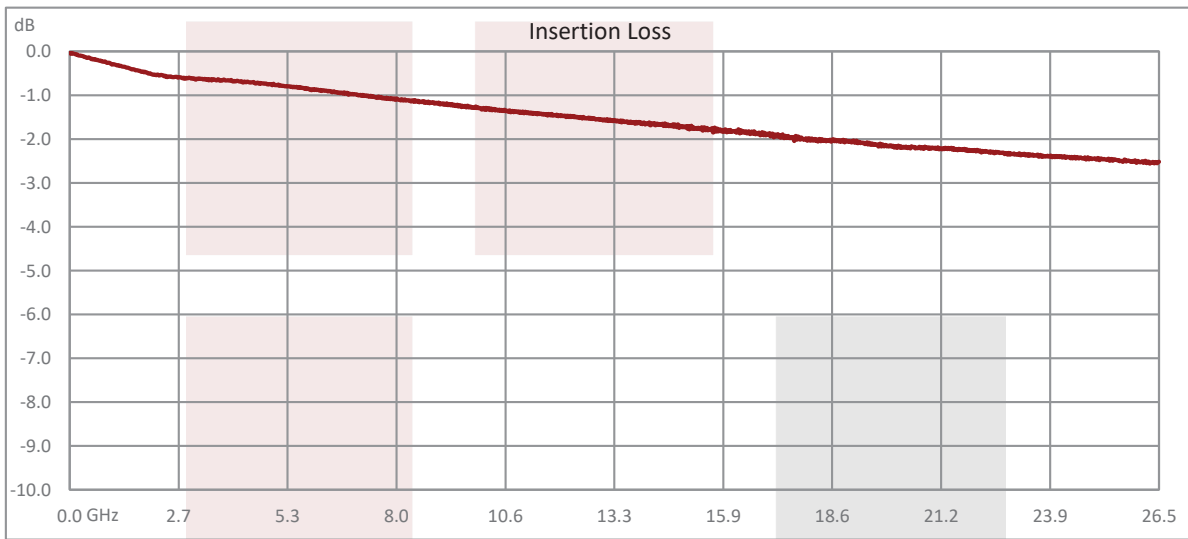


Test data taken with 2 connectors on both ends of test fixture

SMA Female PCB Connector End Launch Clamp/Solder (Captive Contact) Attachment Microstrip/Coplanar Launch, 0.005 inch from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Female PCB Connector End Launch Clamp/Solder \(Captive Contact\) Attachment Microstrip/Coplanar Launch, 0.005 inch FMCN1490](#)

URL: <https://www.fairviewmicrowave.com/sma-female-end-launch-pcb-connector-fmcn1490-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

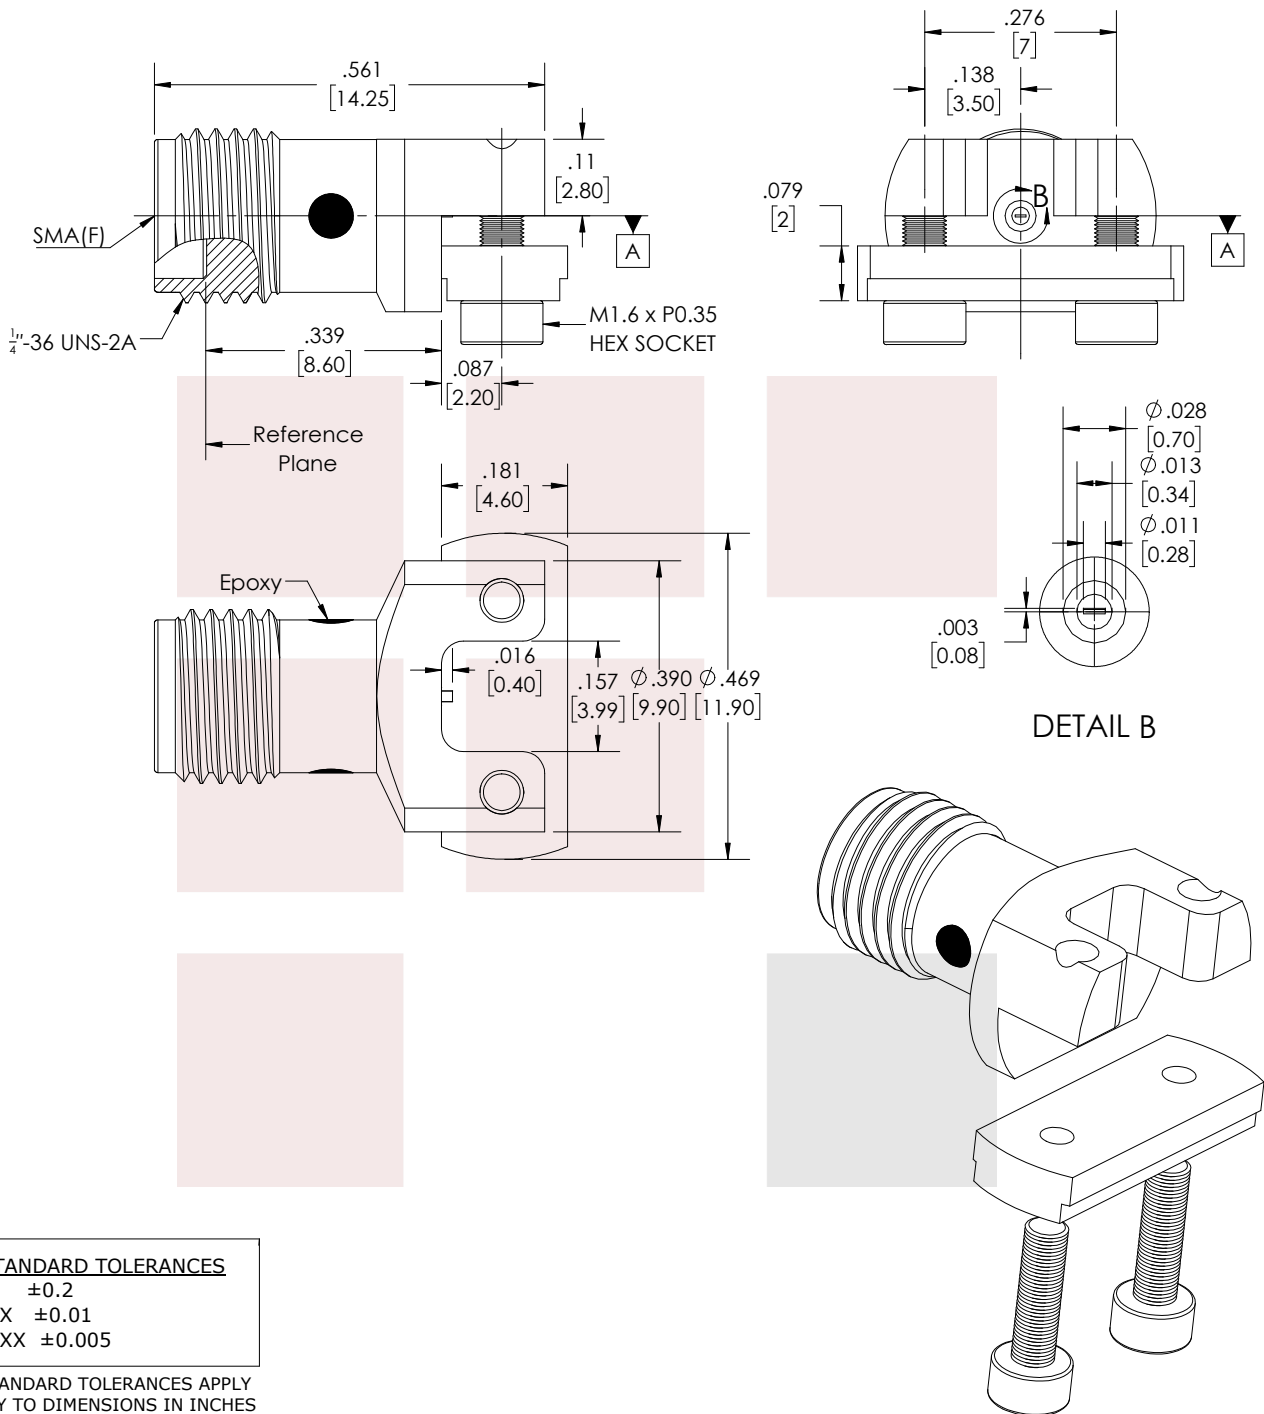

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].		
TITLE SMA Female PCB Connector End Launch Clamp/Solder (Captive Contact) Attachment Microstrip/Coplanar Launch, 0.005 inch		DWG NO FMCN1490		CAGE CODE 3FKR5
CAD FILE	06/04/18	SHEET	SCALE	N/A SIZE A CN2379