

4 Way Power Divider SMA Interface from 1 GHz to 2 GHz Rated at 30 Watts

FMDV2103 is a passive 4 way RF Power Divider with 50 ohm N female connectors operating from 1 GHz to 2 GHz, with a max input power of 30 watts. The FMDV2103 has less than 20 dB Isolation, 0.6 dB Maximum Insertion loss and a Max VSWR of 1.25:1; along with a phase balance of ± 3 degrees and an amplitude balance of ± 0.3 dB. The RF Divider operates in a temperature range from -45°C to 85°C and are rated for Humidity, Shock, Vibration, and Altitude. Power dividers have many applications and so perform many valuable functions within the RF/Microwave world. Examples are antenna beam forming, taps for cable distributed systems combining feeds to and from antennae.



Electrical Specifications

Description	Min	Typ	Max	Units
Design			Standard	
Number of Output Ports			4	
Frequency Range	1		2	GHz
Impedance		50		Ohms
Input VSWR		1.2:1	1.25:1	
Output VSWR		1.15:1	1.2:1	
Insertion Loss		0.35	0.6	dB
Isolation	20	21.5		dB
Amplitude Balance		0.2	0.3	dB
Phase Balance		2	3	Degrees
Input Power (CW)			30	Watts
Reverse Power (CW)			2	Watts
Input Power (Peak)			300	Watts

Mechanical Specifications

Size	
Length	0 in [0 mm]
Width	0 in [0 mm]
Height	0 in [0 mm]
Weight	0.13 lbs [58.97 g]
Finish	Gray
Housing Material and Plating	Aluminum

Configuration

Input Connector	SMA Female
-----------------	------------

Environmental Specifications

Temperature

Operating Range	-40 to $+85$ deg C
Storage Range	-50 to $+105$ deg C

Humidity	100% RH at 35°C , 95%RH at 40°C
----------	--

Features:

- 1 GHz to 2 GHz
- 30 Watts Max Power
- $\pm 3^{\circ}$ Phase Balance
- 20 dB min Isolation
- 4 way SMA divider

Applications:

- Communications Systems
- Amplifier Systems
- Amplifier Power Dividing
- Aerospace/Aviation
- Defense Applications

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Shock
Vibration
Altitude

20G for 11msec half sine wave, 3 axis both directions
25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
30,000ft. Epoxy Sealed, 60,000ft. 1psi min Hermetically Sealed

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


4 Way Power Divider SMA Interface from 1 GHz to 2 GHz Rated at 30 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [4 Way Power Divider SMA Interface from 1 GHz to 2 GHz Rated at 30 Watts FMDV2103](#)

URL: <https://www.fairviewmicrowave.com/4-way-power-divider-sma-2-ghz-fmdv2103-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/1/2021	S. PONG

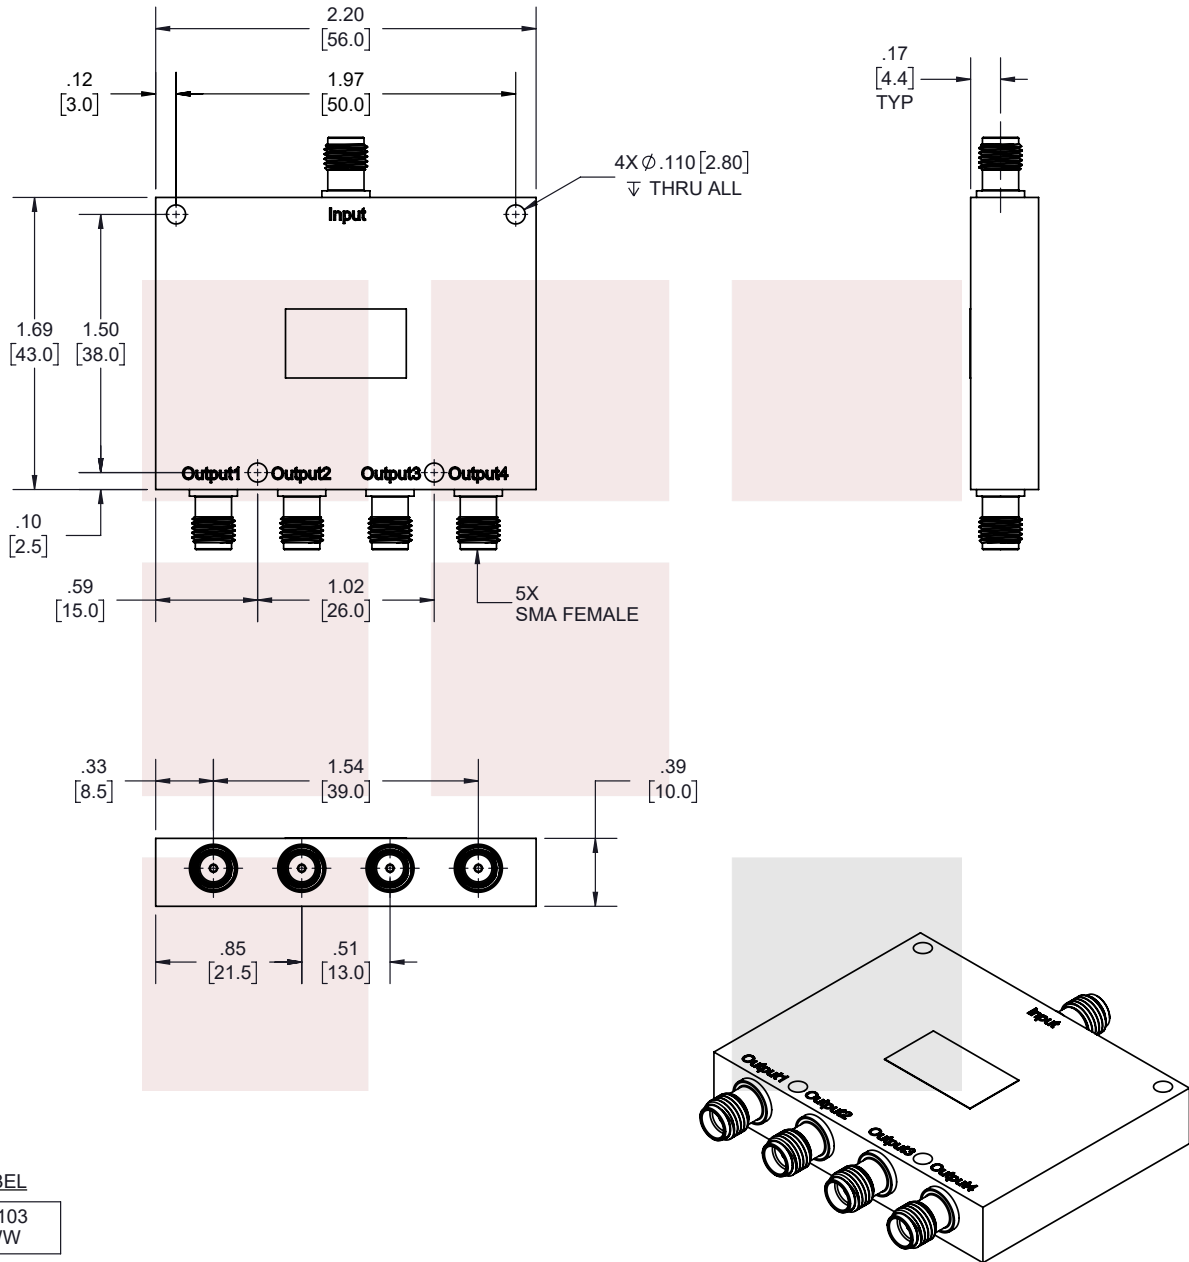

LABEL
DV2103
YYWW

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE
4 Way Power Divider SMA Interface from 1 GHz to 2 GHz Rated at 30 Watts

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS ± 1/32
.XX = ±.02 [.51] ANGLES ± 1°
.XXX = ±.005 [.13]

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE A	CAGE CODE 3FKR5	DRAWN BY K.DANG	ITEM NO. FMDV2103	REV A
-----------	--------------------	--------------------	----------------------	----------

T-Rev.D