

Type N F/F In/Out Bulkhead Coaxial RF Surge Protector, 10MHz - 1GHz, DC Block, 1.5kW, 20kA, Blocking Cap and Gas Tube

RF surge protector (also known as lightning arrester) FMSP1024 from Fairview Microwave utilizing a proprietary surge protection technology protects critical hardware from lightening events while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. Optional weather proofing kit and copper cleaning kit are available for purchase separately. All Fairview Microwave RF surge protector products are available in stock with same day shipping.



Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	10		1,000	MHz
Impedance		50		Ohms
VSWR			1.1:1	
Return Loss			26	dB
Insertion Loss			0.1	dB
Input Power, CW			1.5	kWatts
1.5kW @ 10 to 50MHz				
375W @ 50 to 220MHz				
125W @ 220 to 700MHz				
50W @ 700 to 1000MHz				
Surge Current			20	kA
IEC 61000-4-5 8/20µs WAVEFORM				
Turn On Voltage		600 ±20 %		Volts
Throughput Energy			3,500	mJ
@ 3kA 8/20µs WAVEFORM				

Features:

- Surge current of 20kA
- Max Power 1.5kW
- Frequency range from 10 MHz to 1000 MHz
- N Female to N Female connectors
- VSWR 1.1:1
- Multi-strike capability
- CE & RoHS compliant

Applications:

- HF, UHF and VHF radios
- Ham radios
- Remote industrial monitoring

Mechanical Specifications

Configuration

Input Connector	N Female
Output Connector	N Female

Environmental Specifications

Temperature

Operating Range	-50 to 50 deg C
Storage Range	-55 to +85 deg C

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Type N F/F In/Out Bulkhead Coaxial RF Surge Protector, 10MHz - 1GHz, DC Block, 1.5kW, 20kA, Blocking Cap and Gas Tube from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Type N F/F In/Out Bulkhead Coaxial RF Surge Protector, 10MHz - 1GHz, DC Block, 1.5kW, 20kA, Blocking Cap and Gas Tube FMSP1024](#)

URL: <https://www.fairviewmicrowave.com/type-n-surge-protector-1ghz-blocking-cap-gas-tube-fmsp1024-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

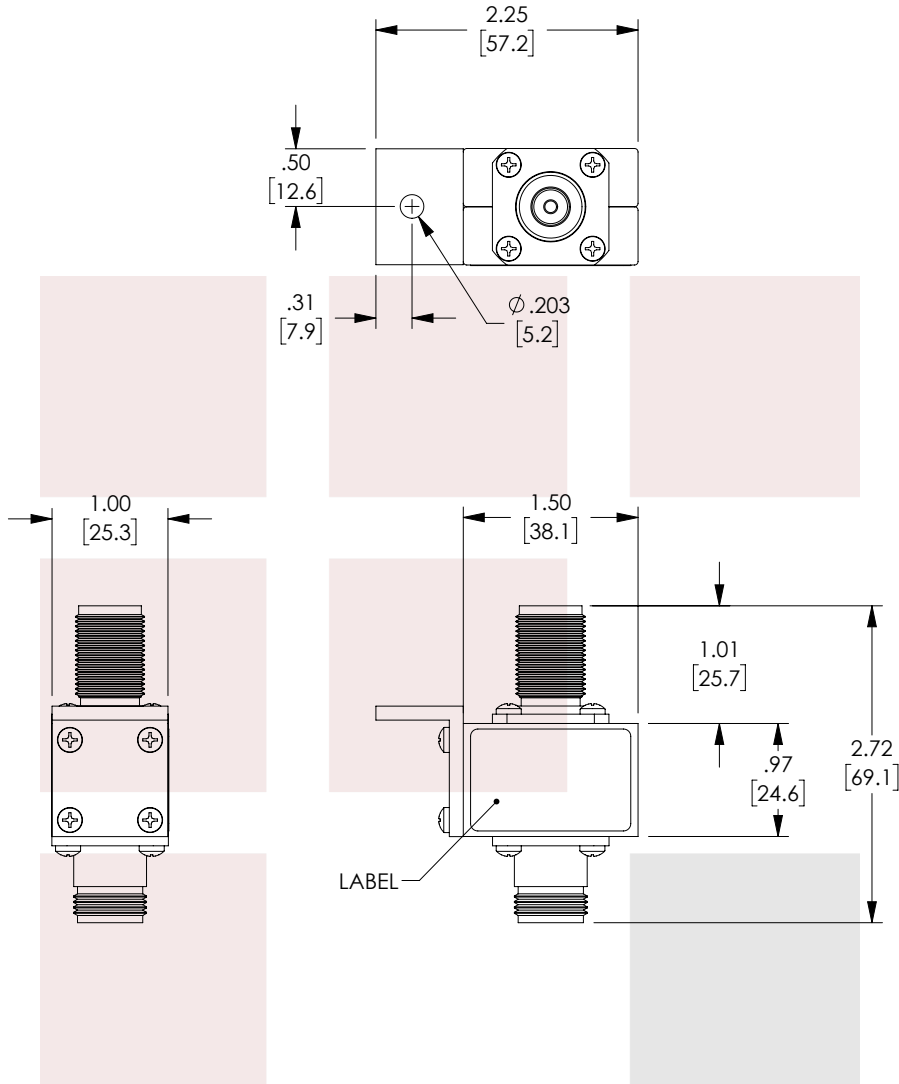

STANDARD TOLERANCES

.X ± 0.2
 .XX ± 0.01
 .XXX ± 0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:

HARDWARE INCLUDED.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

<p>Fairview Microwave RF COMPONENTS ON DEMAND. <i>Done!</i></p>	<p>NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].</p>					
	<p>TITLE Type N F/F In/Out Bulkhead Coaxial RF Surge Protector, 10MHz - 1GHz, DC Block, 1.5kW, 20kA, Blocking Cap and Gas Tube</p>			<p>DWG NO FMS1024</p>		<p>CAGE CODE 3FKR5</p>
<p>CAD FILE 3/14/18</p>	<p>SHEET 1 OF 1</p>	<p>SCALE N/A</p>	<p>SIZE A</p>	<p>XXXX</p>		