

FMSW6496 DATA SHEET

Transfer Electromechanical Relay Failsafe Switch DC to 12.4 GHz, 2M Lifecycles, N, 160 Watts, 28V, Solder Pin

The FMSW6496 is a Transfer electromechanical relay switch that operates across a wide frequency range from DC to 12 GHz and can handle up to 160W of average power in a break before make condition. The 50 Ohm design is rated for 2 million lifecycles and features a Failsafe Actuator. Impressive typical performance includes 0.2 dB insertion loss and isolation greater than 70 dB. This switch requires +28Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports N Type female connectors and Solder Pins for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications (TA = +25°C, DC Voltage = +28 Vdc)

Switch Type Transfer
Actuator Type Failsafe

| Description | Min | Тур | Max | Units |
|--------------------------------|-------|-------|-------|-------|
| Frequency Range | DC | | 12.4 | GHz |
| Operating Voltage | | +28 | | Volts |
| Actuating Current @ +28 \ | /olts | | 160 | mA |
| VSWR | | 1.3:1 | 1.7:1 | |
| Insertion Loss | | 0.2 | 0.7 | dB |
| Isolation | 60 | 70 | | dB |
| Input Power (CW) (at 12.4 GHz) | | | 160 | Watts |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|---------------------|--------|-------|--------|----|----|-------|
| Frequency Range | DC - 1 | 1 - 4 | 4 - 12 | | | GHz |
| VSWR, Max | 1.25:1 | 1.3:1 | 1.7:1 | | | |
| Insertion Loss, Max | 0.2 | 0.3 | 0.7 | | | dB |
| Isolation, Min | 70 | 70 | 60 | | | dB |

Mechanical Specifications

Size

| Length Width/Diameter | 2.52 in [64.01 mm] 3.12 in [79.25 mm |
|--------------------------|---|
| Height | 1.75 in [44.45 mm] |
| Weight | 0.4 lbs [181.44 g] |

Connectors

RF Connector Type N Female



Features:

- Transfer Electromechanical Relay Switch
- DC to 12 GHz Frequency Range
- Failsafe Actuator
- 2M Lifecycle Rating
- Insertion Loss 0.2 dB typ
- Isolation > 70 dB typ
- VSWR as low as 1.25:1 max
- +28 Volt DC Bias
- Solder Terminal Pins for DC Control
- N Type Female Connectors
- -25°C to +65°C Operating Temperature
- Up to 160 Watt Average Power Handling
- 50 Ohm Design
- Hot Switching CapabilityConsult Factory
- S-Parameter Data available upon request
- Rugged Design meets Mil-STD-202 Test Conditions

Applications:

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- SATCOM
- Wireless Communications
- Enterprise
- IoT

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature


Operating Range -25 to +65 deg C Storage Range -55 to +100 deg C

Shock MIL-STD-202 Method 213, Condition D, 500G (non oper)
Vibration MIL-STD-202 Method 204, Condition D, 10G RMS (non oper)

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

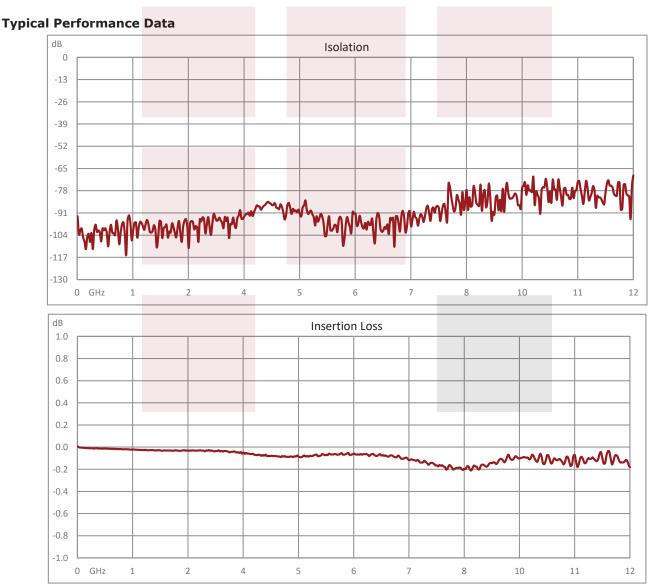






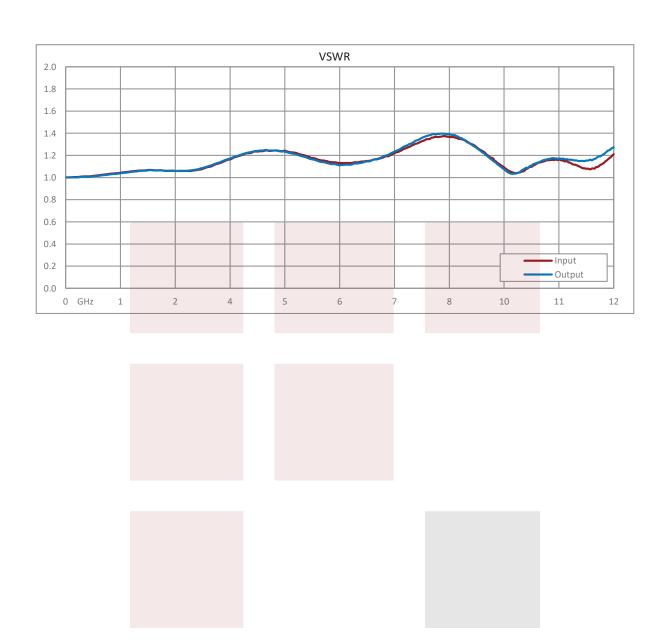





Power Handling vs. Frequency

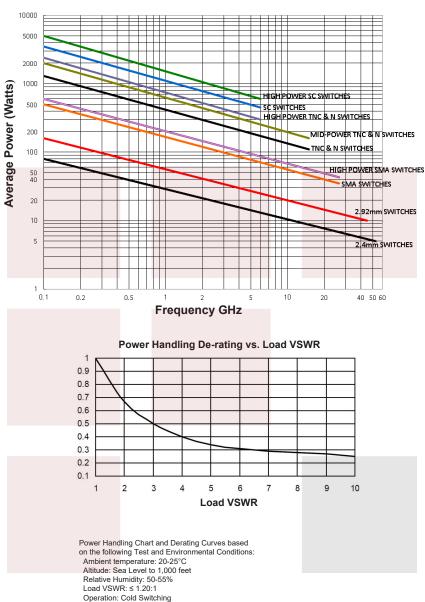





Transfer Electromechanical Relay Failsafe Switch DC to 12.4 GHz, 2M Lifecycles, N, 160 Watts, 28V, Solder Pin from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Transfer Electromechanical Relay Failsafe Switch DC to 12.4 GHz, 2M Lifecycles, N, 160 Watts, 28V, Solder Pin FMSW6496

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/transfer-failsafe-12.4-ghz-electro-mechanical-relay-switch-160w-28v-n-fm-sw6496-p.aspx

| to implem | ent improven | nents. Fairvie | w Microw | ave reserv | es the righ | it to mak | e such | changes | as req | juired. | Unless | otherwise | ; |
|-------------|----------------|-----------------|-----------|--------------|-------------|-----------|--------|-----------|--------|---------|---------|--------------|---|
| | | s are nominal | | | | | | | | | | | |
| suitability | of the part d | escribed here | in for an | y particular | purpose, | and Fair | view M | 1icrowave | does | not ass | sume ai | ny liability | , |
| arising out | t of the use o | f any part or o | documen | tation. | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





