

## RF Load 100 Watts High Power to 2.7 GHz Low PIM Black Anodized Aluminum 4.3-10 Male

Fairview Microwave's FMTR1035A is a high power RF cable termination (also called RF load or dummy load) that operates from 380 to 2,700 MHz and handles up to 100 Watts CW. Our 4.3-10 termination / load is a 50 Ohm impedance and has a male gender. FMTR1035A load termination offers 1.22:1 Typical VSWR and low PIM (passive intermodulation) of -160 dBc. This Fairview Microwave 100 Watts terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, hybrids, and combiners. They are also widely used in measurement systems to ensure accurate results. Fairview Microwave offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watts CW.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	0.38		2.7	GHz
Impedance		50		Ohms
Passive Intermodulation	-160			dBc
Input Power (CW)			100	Watts

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Freq. Range	0.38-0.525	0.525-0.698	0.698-2.7			GHz
VSWR, Typ	1.38:1	1.29:1	1.22:1			

### Mechanical Specifications

<b>Size</b>	
Length	10 in [254 mm]
Width	4 in [101.6 mm]
Height	2.8 in [71.12 mm]
Weight	6.3135 lbs [2.86 kg]

### Configuration

Connector	4.3-10 Male
-----------	-------------

### Material Specifications

Description	Material	Plating
Housing	Black Anodized Aluminum	



### Features:

- IP67 Indoor/Outdoor Use (Totally dust tight and moisture protected from effects of prolonged immersion under pressure.)
- High Power RF 50 Ohm Impedance
- 380 to 2,700 MHz Frequency Range
- VSWR 1.22:1
- Max Power 100 Watts (CW)
- Low PIM
- 4.3-10 Male Coaxial Interface
- DC Open

### Applications:

- Wireless
- SatCom
- Test and Measurement
- Commercial and Military Communication
- Base Station
- 4G/AWS/PCS

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**


Notes:

RF Load 100 Watts High Power to 2.7 GHz Low PIM Black Anodized Aluminum 4.3-10 Male from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [RF Load 100 Watts High Power to 2.7 GHz Low PIM Black Anodized Aluminum 4.3-10 Male FMTR1035A](#)

URL: <https://www.fairviewmicrowave.com/rf-load-100-watts-2.7-ghz-low-pim-4.3-10-male-fmtr1035a-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

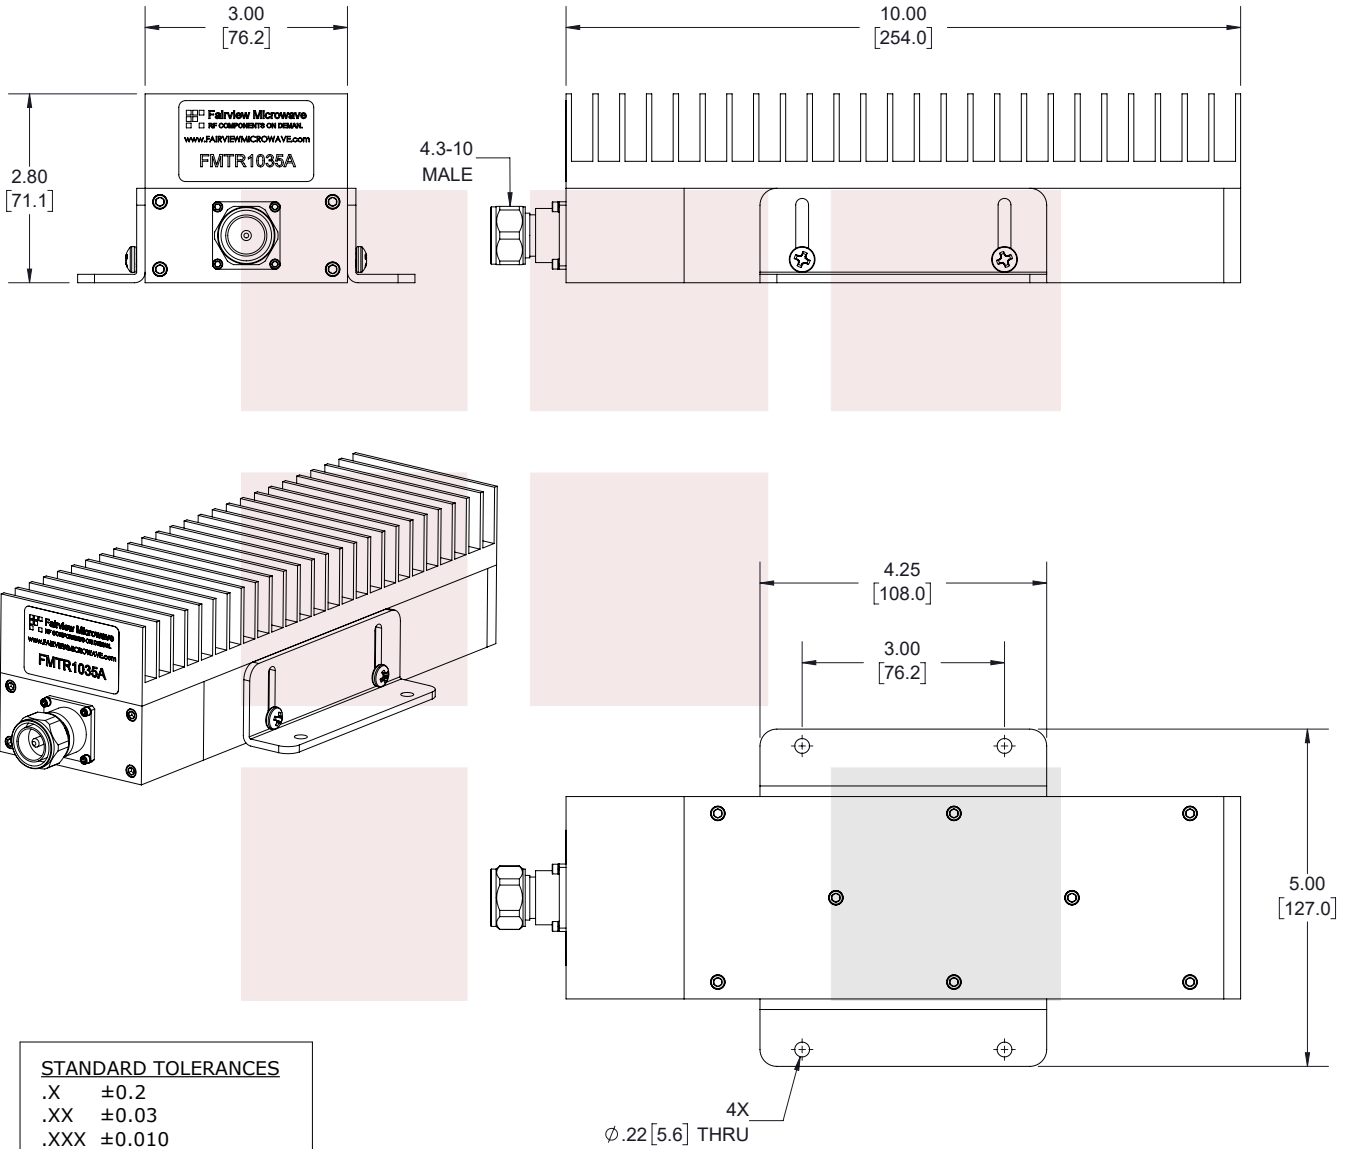

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.03
.XXX	±0.010

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
TITLE RF Load 100 Watts High Power to 2.7 GHz Low PIM Black Anodized Aluminum 4.3-10 Male		DWG NO FMTR1035A		CAGE CODE 3FKR5				
CAD FILE	010918	SHEET	1 OF 1	SCALE	N/A	SIZE	A	7361