

## WR-75 Waveguide Gasket For UG Square Cover Flanges, Conductive Silicone Elastomer



### FMW75CG01

#### Features

- WR-75
- Conductive
- Silicone Rubber
- For UG Square Cover Flanges

#### Applications

- Satellite Communications
- Radar Systems
- Test and Laboratory Setups

#### Description

This conductive gasket is designed to connect two waveguide flanges using stainless steel screws and washers. The FMW75CG01 gasket is specifically made for WR-75 UG Square Cover waveguide flanges. The gasket itself is made of Conductive Silicone Rubber, providing a durable and flexible seal.

Fairview Microwave has waveguide gaskets (both conductive and non-conductive), screws and other accessories that you need for your waveguides. Often people can forget to order items like screws or waveguide supports. Fairview Microwave has a full line of waveguide accessories available for same day shipment so that you do not have to wait for weeks to get your system working.

#### Mechanical Specifications

Body Material	Conductive Silicone Rubber
Length	1.5 in [38.1 mm]
Width	1.5 in [38.1 mm]
Height	0.03 in [0.76 mm]
Weight	3.5 lbs [1.59 kg]

#### Environmental Specifications

<b>Temperature</b>	
Operating Range	-40 to 70 deg C

#### Compliance Certifications (see [product page](#) for current document)

WR-75 Waveguide Gasket For UG Square Cover Flanges, Conductive Silicone Elastomer from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [WR-75 Waveguide Gasket For UG Square Cover Flanges, Conductive Silicone Elastomer FMW75CG01](#)

URL: <https://www.fairviewmicrowave.com/wr-75-waveguide-gasket-for-ug-square-cover-flanges-conductive-silicone-elastomer-fmw75cg01-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMW75CG01 CAD Drawing

WR-75 Waveguide Gasket For UG Square Cover Flanges, Conductive Silicone Elastomer

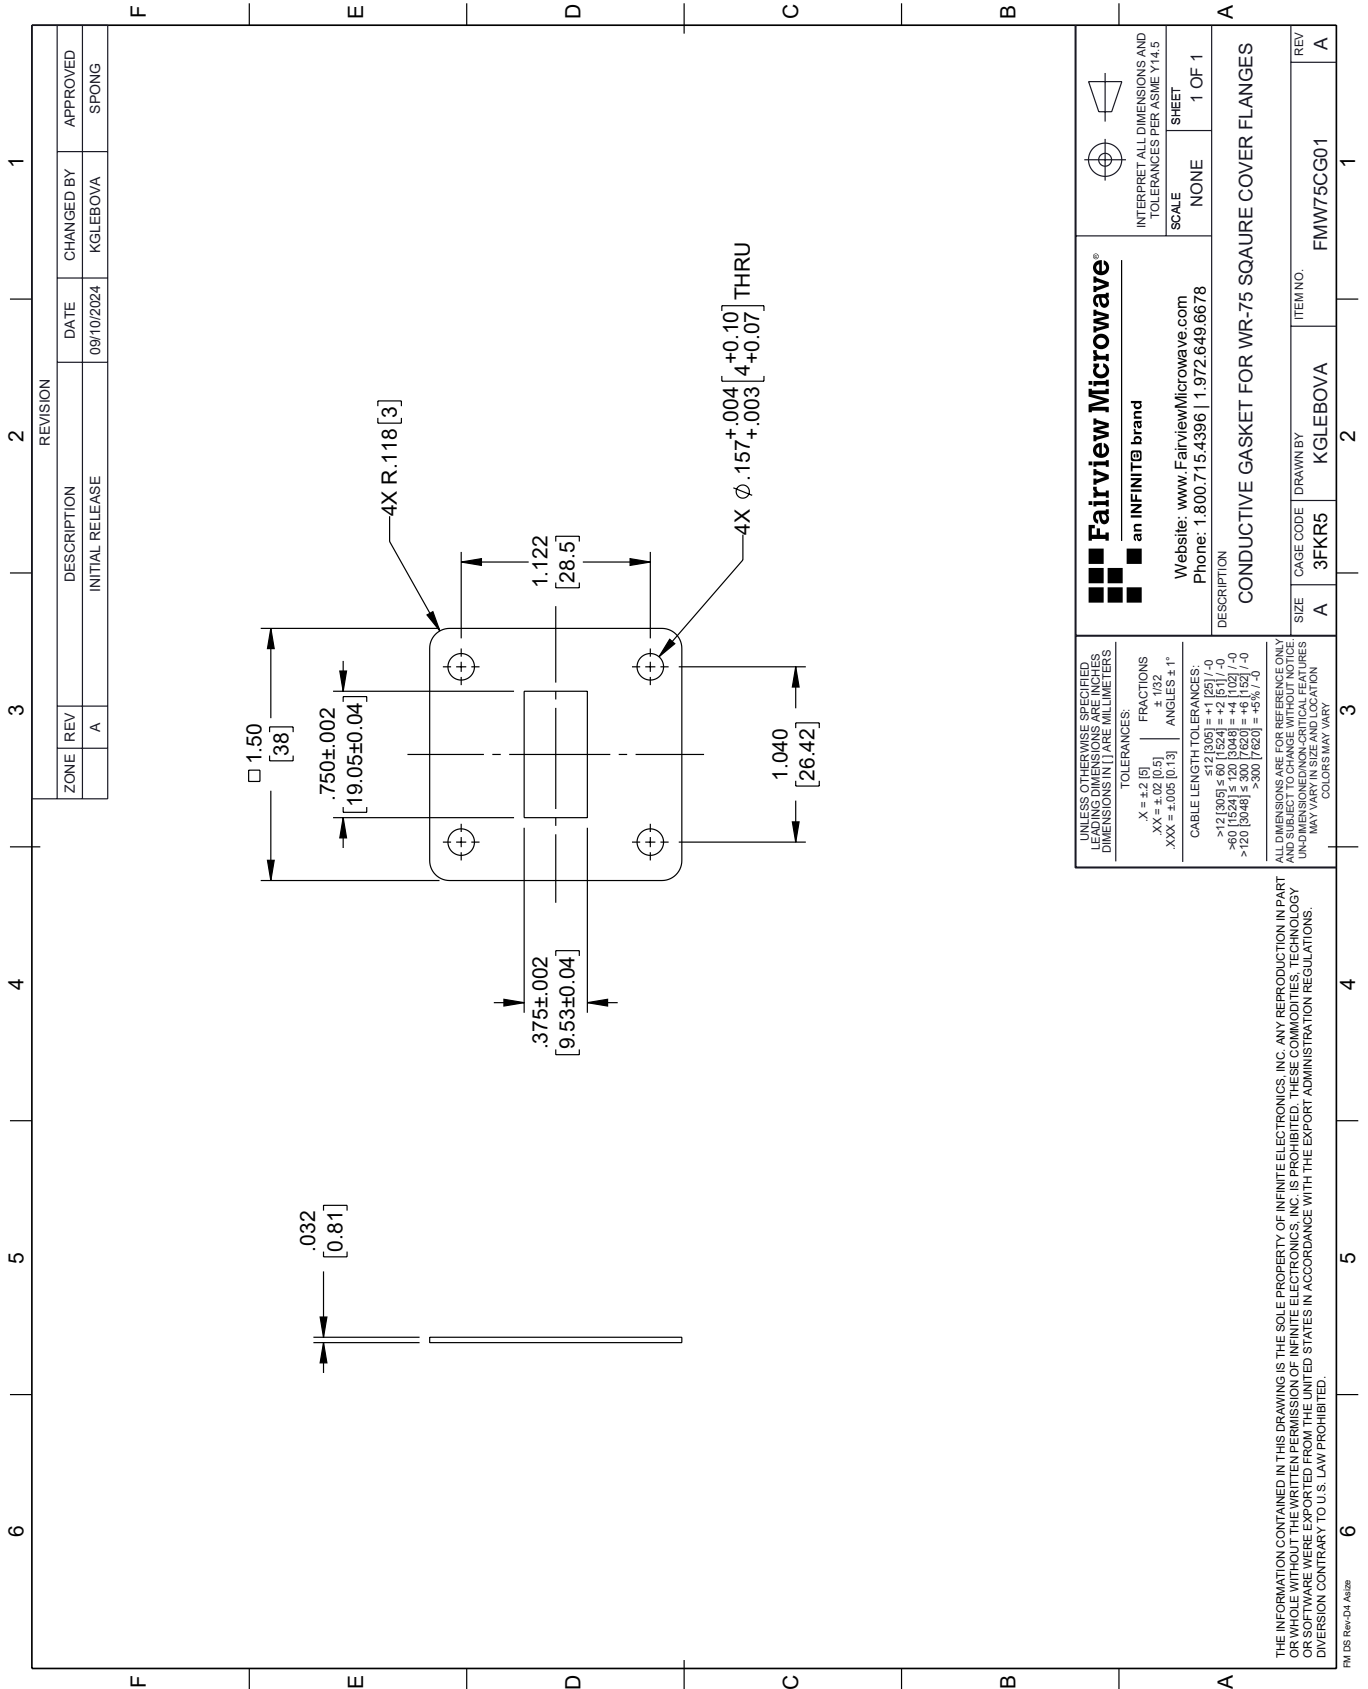

REVISION		DESCRIPTION	DATE	CHANGED BY	APPROVED
ZONE	REV	INITIAL RELEASE	09/10/2024	KGLEBOVA	SPONG
A					

**Fairview Microwave**  
an INFINITIB brand

Website: [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com)  
Phone: 1.800.715.4396 | 1.972.649.6678

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE  
SHEET: 1 OF 1

DESCRIPTION: CONDUCTIVE GASKET FOR WR-75 SQUARE COVER FLANGES

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	3FKR5	KGLEBOVA	FMW75CG01

REV: A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [ ] ARE MILLIMETERS.

TOLERANCES:  
 .X = ±.2 [5]  
 .XX = ±.02 [0.5]  
 .XXX = ±.005 [0.13]

FRACTIONS: ± 1/32  
 ANGLES: ± 1°

CABLE LENGTH TOLERANCES:  
 <12 [305] ≤ 60 [1524] = ±.1 [2.5] / -0  
 >60 [1524] ≤ 120 [3048] = ±.4 [10.2] / -0  
 >120 [3048] ≤ 300 [7620] = ±.8 [20.3] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED/UNCLEAR FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PM DS Rev-D4 Alt2