

20 dB Fixed Attenuator 75 Ohm BNC Male To 75 Ohm BNC Female Up To 3 GHz Rated To 2 Watts With Brass Nickel Body

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock selections and ships them same day. The SA03B75-20 is a 20 dB Fixed Attenuator that operates from DC to 3 GHz and is rated to 2 Watts. The versatile coaxial package uses BNC male to BNC female connectors and is also REACH and RoHS compliant.

Electrical Specifications

| Description | Min | Тур | Max | Units |
|----------------------|-----|------|-----|-------|
| Frequency Range | DC | | 3 | GHz |
| Impedance | | 75 | | Ohms |
| Nominal Attenuation | | 20 | | dB |
| Attenuation Accuracy | | ±0.5 | | dB |
| Input Power, CW | | | 2 | Watts |

Le covere

SA03B75-20

DATA SHEET

Features:

- DC to 3 GHz Frequency Range
- Attenuation 20±0.5 dB
- Max Power 2 Watts (CW)
- VSWR 1.3:1

Applications:

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-------------|---------|--------|----|----|----|-------|
| Range | DC to 2 | 2 to 3 | | | | GHz |
| VSWR, Typ | 1.2:1 | 1.3:1 | | | | |

Mechanical Specifications

Size Length Width/Diameter Weight Body Material and Plating

Configuration

Design Package Style 1.8 in [45.72 mm] 0.59 in [14.99 mm] 0.055 lbs [24.95 g] Brass, Nickel

Fixed Connectorized Module

> Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

asurements and characterizati





Connectors

| Description | Connector 1 | Connector 2 | | |
|----------------------------|---------------|------------------------|--|--|
| Туре | BNC Male | BNC Female | | |
| Connection Method | Standard | Standard | | |
| Polarity | Standard | Standard | | |
| Contact Material & Plating | Brass, Gold | Beryllium Copper, Gold | | |
| Dielectric Type | PTFE | PTFE | | |
| Body Material & Plating | Brass, Nickel | Brass, Nickel | | |

Environmental Specifications


 Compliance Certifications (visit www.FairviewMicrowave.com for current document)

 RoHS Compliant
 Yes

 REACH Compliant
 12/17/2015

Plotted and Other Data

Notes:

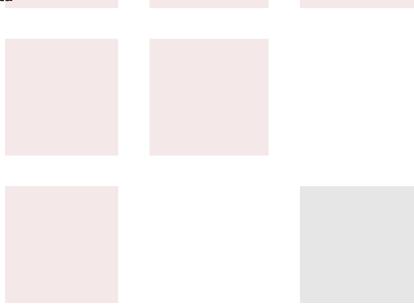








Typical Performance Data

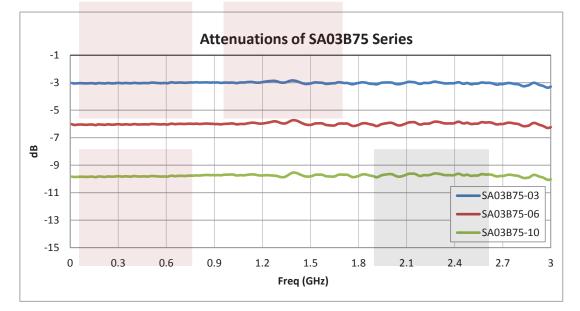

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





20 dB Fixed Attenuator 75 Ohm BNC Male To 75 Ohm BNC Female Up To 3 GHz Rated To 2 Watts With Brass Nickel Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 20 dB Fixed Attenuator 75 Ohm BNC Male To 75 Ohm BNC Female Up To 3 GHz Rated To 2 Watts With Brass Nickel Body SA03B75-20

URL: http://www.fairviewmicrowave.com/20db-fixed-attenuator-bnc-male-bnc-female-2-watts-sa03b75-20-p.aspx







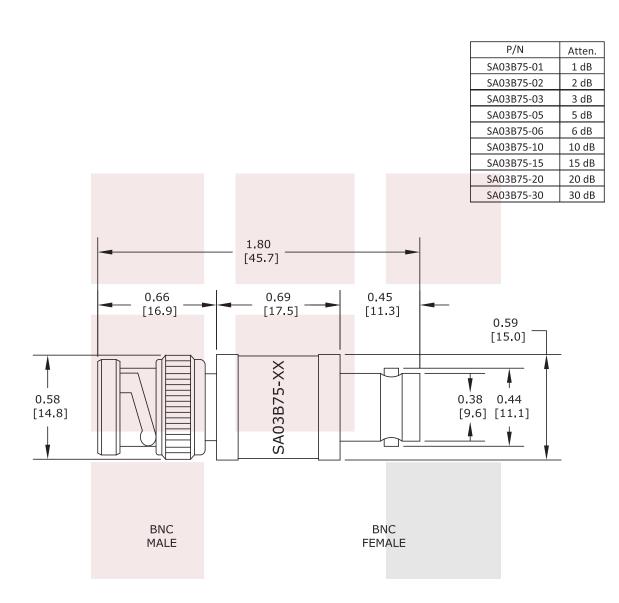

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | |
|---|---|-------|-------|-----------------|--------|------|
| 20 dB Fixed Attenuator 75 Ohm BNC Male To 75 Ohm BNC Female Up To 3 GHz Rated To 2 Watts With Brass Nickel Body | DWG NO SA03B75 | | (| CAGE CODE 3FKR5 | | |
| | CAD FILE 042816 | SHEET | SCALE | N/A | SIZE A | 3045 |

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689