

# SA4F75-10 DATA SHEET

# 10 dB Fixed Attenuator 75 Ohm F Male To 75 Ohm F Jack Up To 4 GHz Rated To 0.25 Watts With Brass Tri-Metal Body

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock selections and ships them same day. The SA4F75-10 is a 10 dB Fixed Attenuator that operates from DC to 4 GHz and is rated to 0.25 Watt. The versatile coaxial package uses F male to F jack connectors and is also REACH and RoHS compliant.

## **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
Impedance		75		Ohms
Nominal Attenuation		10		dB
VSWR			1.3:1	
Input Power, CW			0.25	Watts

# **Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Range	DC to	2 2 to 4				GHz
Atten Accuracy, Typ	±0.3	±0.5				dB

Electrical Specification Notes: Impedance deviation of  $\pm 0.25$  Ohms

#### **Mechanical Specifications**

**Size** 

Length2.02 in [51.31 mm]Width/Diameter0.43 in [10.92 mm]Weight0.063 lbs [28.58 g]Body Material and PlatingBrass, Tri-Metal

Configuration

Design Fixe

Package Style Connectorized Module



#### Features:

- DC to 4 GHz Frequency Range
- Attenuation 10±0.5 dB
- Max Power 0.25 Watts (CW)
- VSWR < 1.3:1</li>

# **Applications:**

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Connectors**

Description	Connector 1	Connector 2		
Туре	F Male	F Jack		
Connection Method	Standard	Standard		
Polarity	Standard	Standard		
Contact Material & Plating	Brass, Gold	Phosphor Bronze, Gold		
Contact Plating Spec.	4 μ-in min.	4 μ-in min.		
Dielectric Type	Teflon	Teflon		
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal		
Body Plating Spec.	4 μ-in min.	4 μ-in min.		

### **Environmental Specifications**

**Temperature** 

Operating Range -55 to +120 deg C

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes

REACH Compliant 12/17/2015

#### **Plotted and Other Data**

Notes:

10 dB Fixed Attenuator 75 Ohm F Male To 75 Ohm F Jack Up To 4 GHz Rated To 0.25 Watts With Brass Tri-Metal Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 10 dB Fixed Attenuator 75 Ohm F Male To 75 Ohm F Jack Up To 4 GHz Rated To 0.25 Watts With Brass Tri-Metal Body SA4F75-10

URL: http://www.fairviewmicrowave.com/10db-fixed-attenuator-f-male-f-jack-2-watts-sa4f75-10-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 2.0 Page 2 of 3





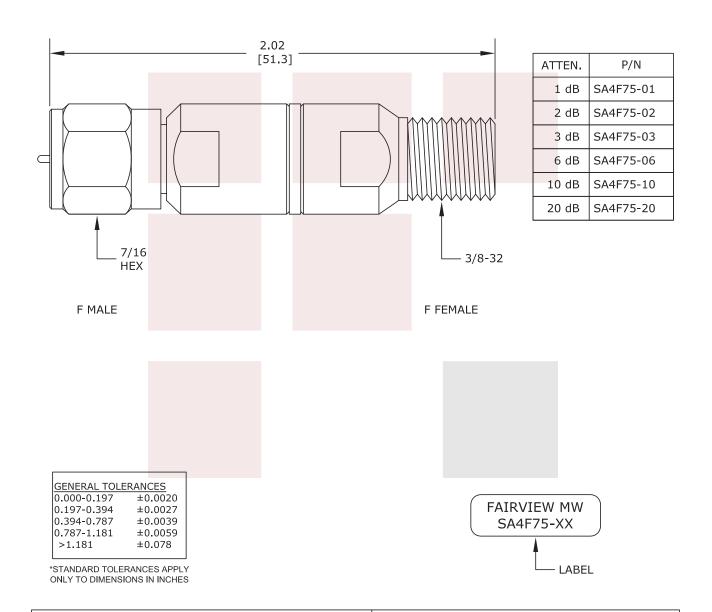

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
10 dB Fixed Attenuator 75 Ohm F Male To 75 Ohm F Jack Up To 4 GHz Rated To 0.25 Watts With Brass Tri-Metal Body	DWG NO SA4F75			CAGE CODE 3FKR5		
	CAD FILE 042816	SHEET	SCALE	N/A	SIZE A	3045