

6 dB Fixed Attenuator 75 Ohm N Male (Plug) to 75 Ohm N Female (Jack) Up to 4 GHz Rated to 0.25 Watts, Brass Tri-Metal Body, 1.3 VSWR

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The SA4N75-06 is a 6 dB Fixed Attenuator that operates from DC to 4 GHz and is rated to 0.25 Watts. The versatile coaxial package uses type N male to type N female connectors and is also REACH and RoHS compliant.



Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		4	GHz
Impedance		75		Ohms
Nominal Attenuation		6		dB
Attenuation Accuracy			0.5	dB
VSWR			1.3:1	
Input Power, CW			0.25	Watts

Mechanical Specifications

Size	
Length	0 in [0 mm]
Width/Diameter	0 in [0 mm]
Height	0 in [0 mm]
Weight	0.12875 lbs [58.4 g]
Body Material and Plating	Brass, Tri-Metal

Configuration

Design	Fixed
--------	-------

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Female

Environmental Specifications

Temperature

Operating Range	-55 to +120 deg C
-----------------	-------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


6 dB Fixed Attenuator 75 Ohm N Male (Plug) to 75 Ohm N Female (Jack) Up to 4 GHz Rated to 0.25 Watts, Brass Tri-Metal Body, 1.3 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [6 dB Fixed Attenuator 75 Ohm N Male \(Plug\) to 75 Ohm N Female \(Jack\) Up to 4 GHz Rated to 0.25 Watts, Brass Tri-Metal Body, 1.3 VSWR SA4N75-06](#)

URL: <https://www.fairviewmicrowave.com/6db-fixed-attenuator-n-male-n-female-2-watts-sa4n75-06-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



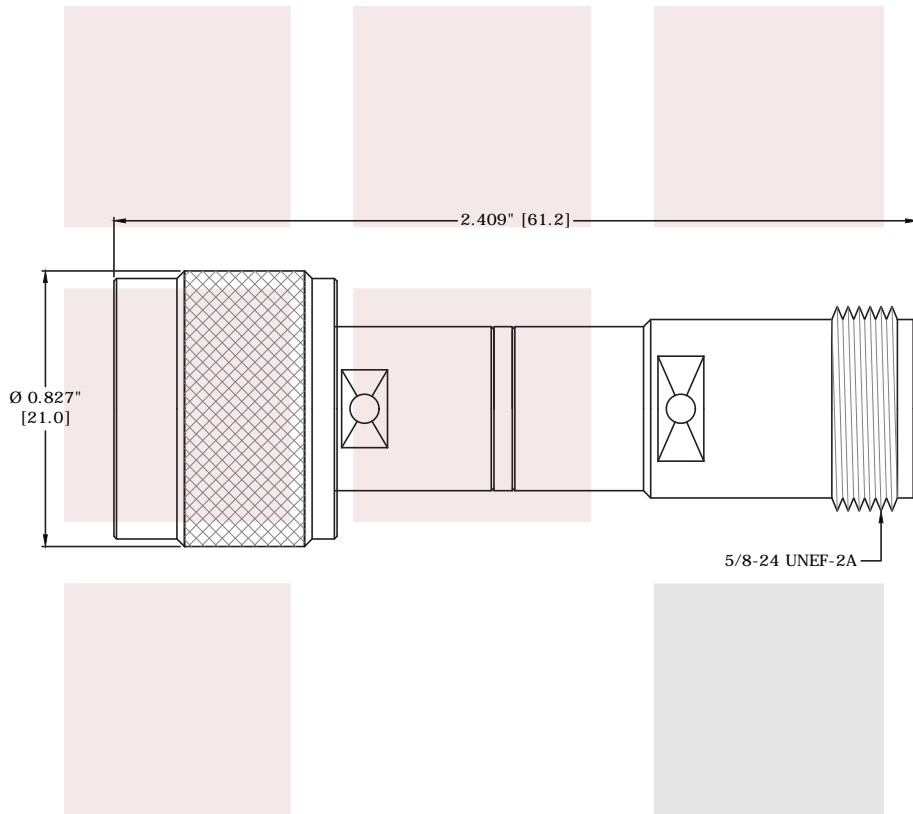

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE
6 dB Fixed Attenuator 75 Ohm N Male (Plug) to 75 Ohm N Female (Jack) Up to 4 GHz Rated to 0.25 Watts, Brass Tri-Metal Body, 1.3 VSWR

DWG NO		SA4N75-06		CAGE CODE		3FKR5	
CAD FILE	032116	SHEET		SCALE	N/A	SIZE	A 5568