

# 40 dB Gain 0.8 dB NF Low Noise High Gain Amplifier Operating From 10 MHz to 1,000 MHz with 18 dBm P1dB and SMA

SLNA-010-40-08-SMA is a wideband low noise RF coaxial power amplifier operating in the 10 MHz to 1 GHz frequency range. The amplifier offers 0.8 dB typical noise figure, 18 dBm of P1dB and 40 dB small signal gain with the excelent gain flatness of  $\pm 1$  dB. This exceptional technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -40°C and +85°C.

## **Electrical Specifications** (TA = +25°C, DC Voltage = 12Volts, DC Current = 110mA)

Description		Min	Тур	Max	Unit
Frequency Range		10		1,000	
Small Signal Gain		37	40		dB
Gain Flatness			±1	±1.25	dB
Gain Variance at OTR*			1.25		dB
Output at 1 dB Compres	sion Point	+16	+18		dBm
Output at 1 dB Compres	+16	+18		dBm	
Noise Figure (50 MHz to 1	,000 MHz)		0.8	1	dB
Input VSWR			1.45:1	1.45:1 1.65:1	
Output VSWR			1.3:1	.3:1 1.5:1	
Reverse Isolation		50	55		dB
Operating DC Voltage		10	12	15	Volts
Operating DC Current		100	110	125	mA
Operating Temperature I	-40		+85	°C	

<sup>\*</sup>OTR= Base Plate Operating Temperature Range

#### **Absolute Maximum Rating**

Parameter	Rating	Units
Source Voltage	+15	Volts
RF input Power	+13	dBm
Operating Temperature (base-plate)	-40 to +85	°C
Storage Temperature	-55 to +125	°C



ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

SMA Female

### **Mechanical Specifications**

**Output Connector** 

 Size

 Length
 1.5 in [38.1 mm]

 Width
 0.85 in [21.59 mm]

 Height
 0.375 in [9.53 mm]

 Input Connector
 SMA Female



#### **Features:**

- 10 MHz to 1 GHz Frequency Range
- P1dB: 18 dBm
- Flat Small Signal Gain: 40 dB
- Gain Flatness: ±1 dB
- Noise Figure: 0.8dB typ
- Reverse Isolation: 55 dB
- 50 Ohm Input and Output Matched
- -40 to 85°C Operating Temperature
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- · Overvoltage Protection

## **Applications:**

- Laboratory Applications
- R&D Labs
- Military Radio
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- · Military & Space
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Cellular Base Stations
- · Low Noise Amplifier
- General Purpose Amplification
- General Purpose Wireless
- · Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- · RF Pre-amplification

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

sales@fairviewmicrowave.com



## **Environmental Specifications**

Temperature

Operating Range -40 to +85 deg C Storage Range -55 to +125 deg C

**Compliance Certifications** (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes

#### **Plotted and Other Data**


Notes:


- Values at 25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.





#### **Typical Performance Data**

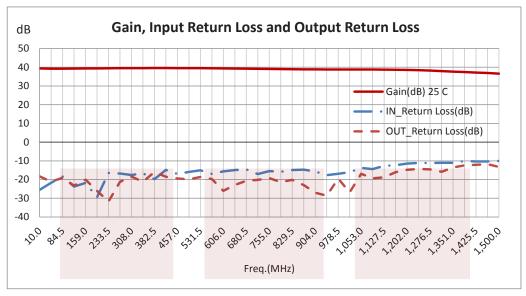

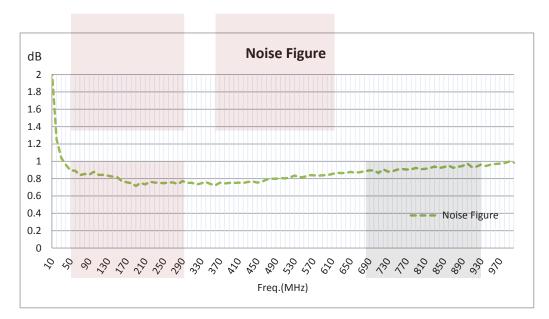



40 dB Gain 0.8 dB NF Low Noise High Gain Amplifier Operating From 10 MHz to 1,000 MHz with 18 dBm P1dB and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 40 dB Gain 0.8 dB NF Low Noise High Gain Amplifier Operating From 10 MHz to 1,000 MHz with 18 dBm P1dB and SMA SLNA-010-40-08-SMA

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: http://www.fairviewmicrowave.com/0.8db-nf-low-noise-amplifier-40db-slna-010-40-08-sma-p.aspx

to implem	ent improv	ements.	Fairview	Microw	ave reserv	es the righ	nt to mal	ke sucl	n changes	as req	quired.	Unles	s oth	nerwise
	specification													
suitability	of the part	describ	ed hereir	for an	y particula	r purpose,	and Fai	rview	Microwave	does	not as	sume	any	liability
arising ou	t of the use	of any	part or do	cument	tation.									



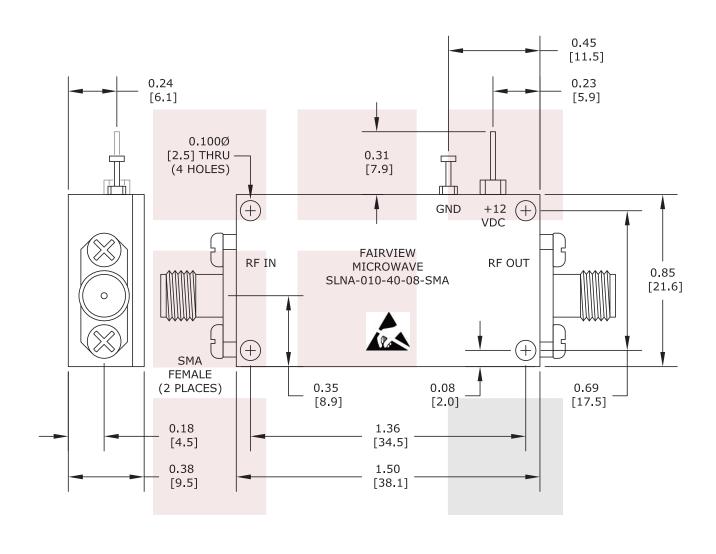

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].							
40 dB Gain 0.8 dB NF Low Noise High Gain Amplifier Operating From 10 MHz to 1,000 MHz with 18 dBm P1dB and SMA	DWG NO SLNA-		CAGE CODE 3FKR5					
	CAD FILE 040215	SHEET	SCALE	N/A	SIZE A	2233		