

SM3411 DATA SHEET

BNC Male to BNC Male Adapter

BNC male to BNC male adapter part number SM3411 from Fairview Microwave is in-stock and ships same day. This Fairview BNC to BNC adapter has a male to male gender configuration. SM3411 BNC male to BNC male adapter operates to 2 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Мах	Units
Frequency Range	DC		2	GHz
VSWR			1.3:1	
Operating Voltage (AC)			500	Vrms

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size Length Width Height Weight		1.244 in [31.6 mm] 0.571 in [14.5 mm] 0.571 in [14.5 mm] 0.0435 lbs [19.73 g]
Description	Connector 1	Connector 2
Туре	BNC Male	BNC Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A



Configuration:

- BNC Male Connector 1
- BNC Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 2 GHz
- BNC interface meets MIL-STD-348A
- 50 µin minimum contact plating
- Gold Plated Brass Contact

Applications:

• General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2	
Туре	BNC Male	BNC Male	
Contact Material	Brass	Brass	
Contact Plating	Gold	Gold	
Contact Plating Spec.	50 µin minimum	50 µin minimum	
Insulation Material	PTFE	PTFE	
Body Material	Brass	Brass	
Body Plating	Nickel	Nickel	
Body Plating Spec.	100 µin minimum	100 µin minimum	
Coupling Nut Material	Brass	Brass	
Coupling Nut Plating	Nickel	Nickel	
Coupling Nut Plating Spec.	100 µin minimum	100 µin minimum	

Environmental Specifications

Temperature Operating Range


-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

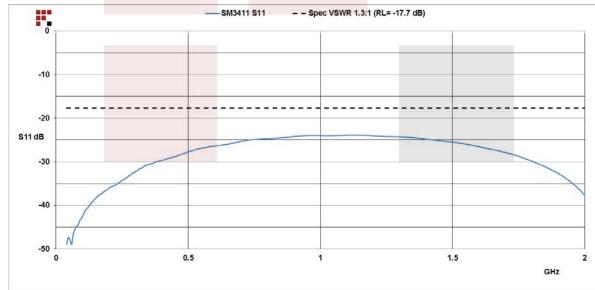





BNC Male to BNC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part


For additional information on this product, please click the following link: BNC Male to BNC Male Adapter SM3411

URL: https://www.fairviewmicrowave.com/bnc-male-bnc-male-adapter-sm3411-p.aspx

described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





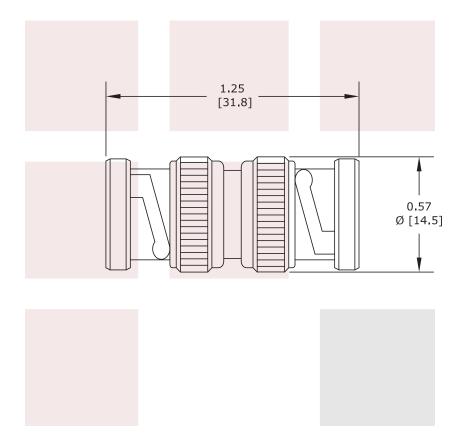

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
™LE BNC Male to BNC Male Adapter	DWG NO SM3411		CAGE CODE 3FKR5			
	CAD FILE 111715	SHEET	SCAL	E N/A	SIZE A	150

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689