

SM3420 DATA SHEET

Bulkhead Isolated Ground BNC Female to BNC Female Adapter

Bulkhead isolated ground BNC female to BNC female adapter part number SM3420 from Fairview Microwave is in-stock and ships same day. This Fairview BNC to BNC adapter has a female to female gender configuration. SM3420 BNC female to BNC female adapter operates to 4 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.5:1 maximum. Our RF BNC bulkhead to BNC adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
VSWR			1.5:1	
Operating Voltage (AC)			500	Vrms

Electrical Specification Notes:

Values at 25°C, sea level

Mechanical Specifications

ecnanicai Specificati	ons
Size	
Length	
Width	
Weight	

1.28 in [32.51 mm]
0.63 in [16 mm]
0.02425 lbs [11 g]

Description	Connector 1	Connector 2
Туре	BNC Female	BNC Female
Polarity	Standard	Standard
Interface Specification		MIL-STD-348
Connector Option	Isolated Ground	Isolated Ground
Hex Size	16 mm	



Configuration:

- BNC Female Connector 1
- BNC Female Connector 2
- 50 Ohm
- Straight Body Geometry
- Bulkhead Mount Method

Features:

- VSWR of 1.5:1 max up to 4 GHz
- Isolated Ground
- BNC interface meets MIL-STD-348
- · 30µ in. minimum contact plating
- Gold Plated Brass Contact

Applications:

- · General Purpose Test
- Rack Mounted Equipment

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2		
Туре	BNC Female	BNC Female		
Contact Material	Brass	Brass		
Contact Plating	Gold	Gold		
Contact Plating Spec.	30μ in. minimum	30μ in. minimum		
Insulation Material	PTFE	ABS		
Outer Contact Material	Brass	Brass		
Outer Contact Plating	Nickel	Nickel		
Outer Contact Plating Spec.	100μ in. minimum	100 µin minimum		
Body Material	Brass	Brass		
Body Plating	Nickel	Nickel		
Body Plating Spec.	100μ in. minimum	100 µin minimum		
Gasket Material	ABS			
Washer Material	Steel	Brass		
Washer Plating	Nickel	Nickel		
Washer Plating Spec.	Nickel	Nickel		

Environmental Specifications

Temperature

Operating Range -40 to +60 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Bulkhead Isolated Ground BNC Female to BNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Bulkhead Isolated Ground BNC Female to BNC Female Adapter SM3420

URL: https://www.fairviewmicrowave.com/bulkhead-isolated-ground-bnc-female-bnc-female-adapter-sm3420-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016 REV 1.1 Page 2 of 3





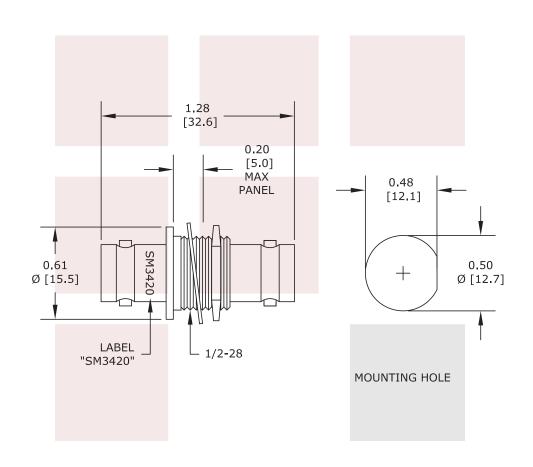

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
Bulkhead Isolated Ground BNC Female to BNC Female Adapter	DWG NO SM3420			CAGE CODE 3FKR5	
	CAD FILE 010516	SHEET	SCALE	N/A	SIZE A