

SM4792 DATA SHEET

MCX Plug to SMA Female Adapter

MCX plug to SMA female adapter part number SM4792 from Fairview Microwave is in-stock and ships same day. This Fairview MCX to SMA adapter has a plug to female gender configuration. SM4792 MCX plug to SMA female adapter operates to 6 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

| Min | Тур | Max | Units |
|-----|-----|-------|---------------|
| DC | | 6 | GHz |
| | | 1.3:1 | |
| | | 335 | Vrms |
| | | | DC 6 1.3:1 |

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

| Size Length Width Weight | | 0.909 in [23.09 mm] 0.354 in [8.99 mm] 0.0135 lbs [6.12 g] |
|--|--------------|--|
| Description | Connector 1 | Connector 2 |
| Туре | MCX Plug | SMA Female |
| Polarity | Standard | Standard |
| Interface Specification | MIL-STD-348A | MIL-STD-348A |
| Mating Cycles | 500 | 500 |



Configuration:

- MCX Plug Connector 1
- SMA Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 6 GHz
- MCX interface meets MIL-STD-348A
- SMA interface meets MIL-STD-348A
- 50 µin minimum contact plating
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

| Description | Connecto | r 1 | Connector | Connector 2 | |
|-----------------------------|--------------|------------------|-------------|------------------|--|
| Туре | MCX Plu | MCX Plug | | SMA Female | |
| Contact Material | Beryllium Co | Beryllium Copper | | Beryllium Copper | |
| Contact Plating | Gold | Gold | | Gold | |
| Contact Plating Spec. | 50 µin mini | 50 µin minimum | | 50 µin minimum | |
| Insulation Material | PTFE | PTFE | | PTFE | |
| Outer Contact Material | | | Brass | | |
| Outer Contact Plating | | | Gold | | |
| Outer Conductor Contact Spe | С. | | 3 µin minim | um | |
| Body Material | Brass | | | | |
| Body Plating | Gold | | | | |
| Body Plating Spec. | 3 µin minir | num | | | |
| | | _ | | - | |

Environmental Specifications

Temperature Operating Range


-55 to +155 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

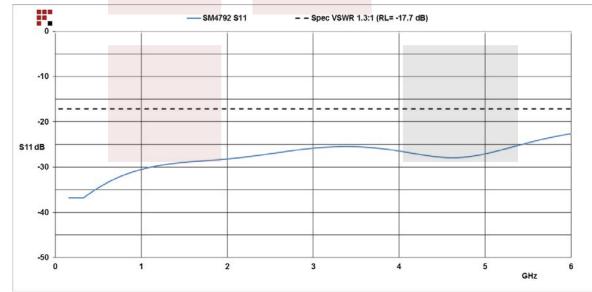





MCX Plug to SMA Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part

For additional information on this product, please click the following link: MCX Plug to SMA Female Adapter SM4792


URL: https://www.fairviewmicrowave.com/mcx-plug-sma-female-adapter-sm4792-p.aspx

described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





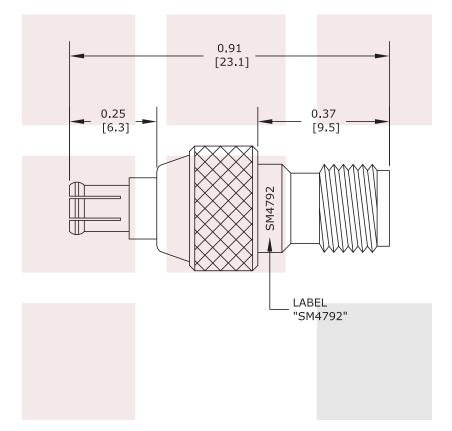

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | |
|--|---|-------|------|-----------------|--------|-----|
| TITLE MCX Plug to SMA Female Adapter | DWG NO SM4792 | | | CAGE CODE 3FKR5 | | |
| | CAD FILE 112315 | SHEET | SCAL | E N/A | SIZE A | 150 |

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689