



BNC T Adapter Female Male Female

BNC T adapter female-male-female part number SM9130 from Fairview Microwave is in-stock and ships same day. This Fairview BNC T adapter has a female-male-female gender configuration. Our BNC T connector operates to 4 GHz.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
Operating Voltage (AC)			500	Vrms

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length 1.28 in [32.51 mm]
Height 1.12 in [28.45 mm]
Weight 0.04718 lbs [21.4 g]

	Connector 2
BNC Female	BNC Male
Standard	Standard
500	500
	Standard

Material Specifications

Description	Connector 1	Connector 2		
Туре	BNC Female	BNC Male		
Contact Material	Brass	Brass		
Contact Plating	Gold	Gold		
Contact Plating Spec.	30 μin minimum	30 µin minimum		
Insulation Material	PTFE	PTFE		
Outer Contact Material	Brass			
Outer Contact Plating	Nickel			
Outer Contact Plating Spec.	100 μin minimum			
Body Material		Brass		
Body Plating		Nickel		
Body Plating Spec.		100 µin minimum		



Configuration:

- BNC Female Connector 1
- BNC Male Connector 2
- 50 Ohm
- Tee Body Geometry

Features:

- 30 µin minimum contact plating
- Gold Plated Brass Contact

Applications:

· General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature


Operating Range -65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

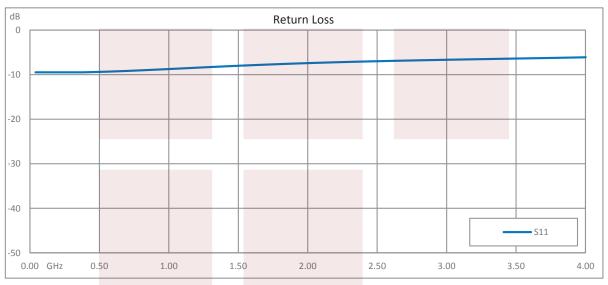

BNC T Adapter Female Male Female from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: BNC T Adapter Female Male Female SM9130

URL: https://www.fairviewmicrowave.com/bnc-female-male-female-tee-adapter-sm9130-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 2.0 Page 2 of 3





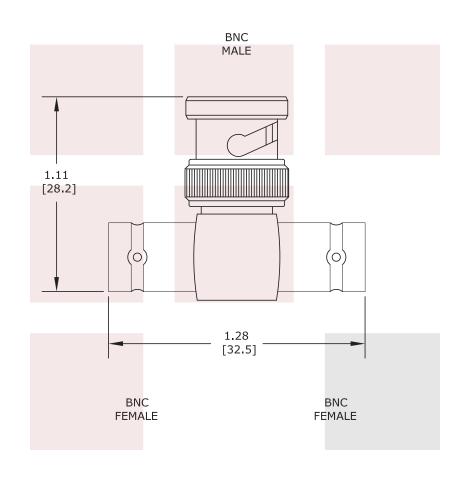

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
BNC T Adapter Female Male Female	DWG NO SM9130		CAGE CODE 3FKR5			
	CAD FILE 111116	SHEET	SCAL	E N/A	SIZE A	41742