Fairview Microwave

# Termination (Load) 5 Watts To 40 GHz Heatsink Body 2.92mm Male (Plug), 1.45 VSWR, 200 Watts Peak Power

RF termination (also called RF load or dummy load) ST4021 from Fairview Microwave operates from DC to 40 GHz and handles up to 5 Watts (CW). This 2.92mm termination (or load) has a male gender. ST4021 2.92mm load termination offers 1.45:1 max VSWR. This 5W 2.92mm terminator from Fairview Microwave has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF terminations / loads are critical passive components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can reduce the signal integrity can potentially damage the device. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These radio frequency termination components are commonly used to terminate devices such as couplers, circulators, and switches. Loads / terminations are also widely used in measurement systems to ensure accurate results. Fairview offers a large selection of in-stock RF, microwave and millimeter wave terminations up to 65 GHz with great performance over the entire operating range and with power handling capabilities up to 800 Watts (CW).

## **Electrical Specifications**

Description	Min	Тур	Мах	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms
VSWR			1.45:1	
Input Power (CW)			5	Watts
derated linearly to 0.5W	/ at +125°C			
Input Power (Peak)			200	Watts
5µs pulse, 1.25% duty	cycle			

## **Mechanical Specifications**

**Size** Length Width Weight

## Configuration

Connector Hex Size 2.92mm Male 5/16 inch

1 in [25.4 mm]

1.5 in [38.1 mm] 0.0841 lbs [38.15 g]

## **Material Specifications**

Description	Material	Plating		
Connector 1 Contact	Beryllium Copper	Gold MIL-G-45204		
Body	Passivated Stainless Steel			
Housing	Black Anodized Aluminum Heatsin	k		

# ST4021 DATA SHEET



## Features:

- DC to 40 GHz Frequency Range
- VSWR 1.45:1 Max
- Max Power 5 Watts (CW)
- 2.92mm Male Coaxial Interface

## **Applications:**

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military
  Communication

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





## **Environmental Specifications**

**Temperature** Operating Range


-55 to +125 deg C

## Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

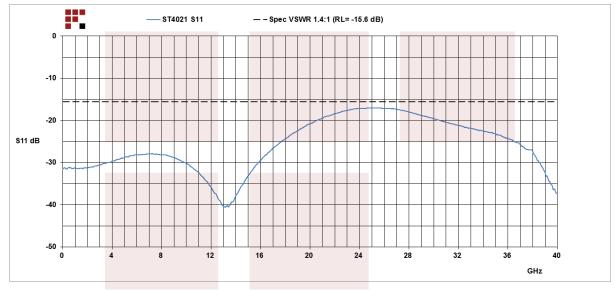

Termination (Load) 5 Watts To 40 GHz Heatsink Body 2.92mm Male (Plug), 1.45 VSWR, 200 Watts Peak Power from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: Termination (Load) 5 Watts To 40 GHz Heatsink Body 2.92mm Male (Plug), 1.45 VSWR, 200 Watts Peak Power ST4021

URL: https://www.fairviewmicrowave.com/rf-load-5-watts-40-ghz-precision-2.92mm-male-st4021-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





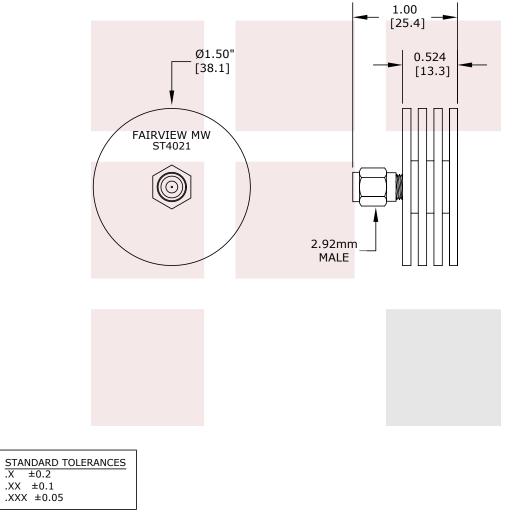

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE Termination (Load) 5 Watts To 40 GHz Heatsink Body 2.92mm Male (Plug), 1.45 VSWR, 200 Watts Peak Power	DWG NO ST4021			CAGE CODE 3FKR5		
	CAD FILE 041316	SHEET	SCALE	E N/A	SIZE A	3045

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689