

RF Load 2 Watts To 6 GHz Tri-Metal Plated Brass RP N Male

RF termination (also called RF load or dummy load) STN0619 from Fairview Microwave operates from DC to 6 GHz and handles up to 2 Watts (CW). This Reverse Polarity N termination (or load) has a male gender. STN0619 RP N load termination offers 1.3:1 max VSWR.

RF terminations / loads are critical passive components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can reduce the signal integrity and can potentially damage the device. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These radio frequency termination components are commonly used to terminate devices such as couplers, circulators, and switches. Loads / terminations are also widely used in measurement systems to ensure accurate results. Fairview offers a large selection of in-stock RF, microwave and millimeter wave terminations up to 65 GHz with great performance over the entire operating range and with power handling capabilities up to 800 Watts (CW).



Features:

- DC to 6 GHz Frequency Range
- VSWR 1.3:1 Max
- Max Power 2 Watts (CW)
- RP N Male Coaxial Interface

Applications:

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
VSWR			1.3:1	
Input Power (CW) derated linearly to 1W at +125°C			2	Watts
Input Power (Peak)			250	Watts

Mechanical Specifications

Size	
Length	1.21 in [30.73 mm]
Width	0.79 in [20.07 mm]
Weight	0.0135 lbs [6.12 g]

Configuration

Connector	N Male Reverse Polarity
Hex Size	20 mm

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold 50 μ-in. min.
Insulation	PTFE	
Body	Brass	Tri-Metal
Coupling Nut	Brass	Tri-Metal
Housing	Brass	Tri-Metal

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Environmental Specifications

Temperature

Operating Range -45 to +120 deg C


Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes
 REACH Compliant 12/17/2015

Plotted and Other Data

Notes:

Typical Performance Data

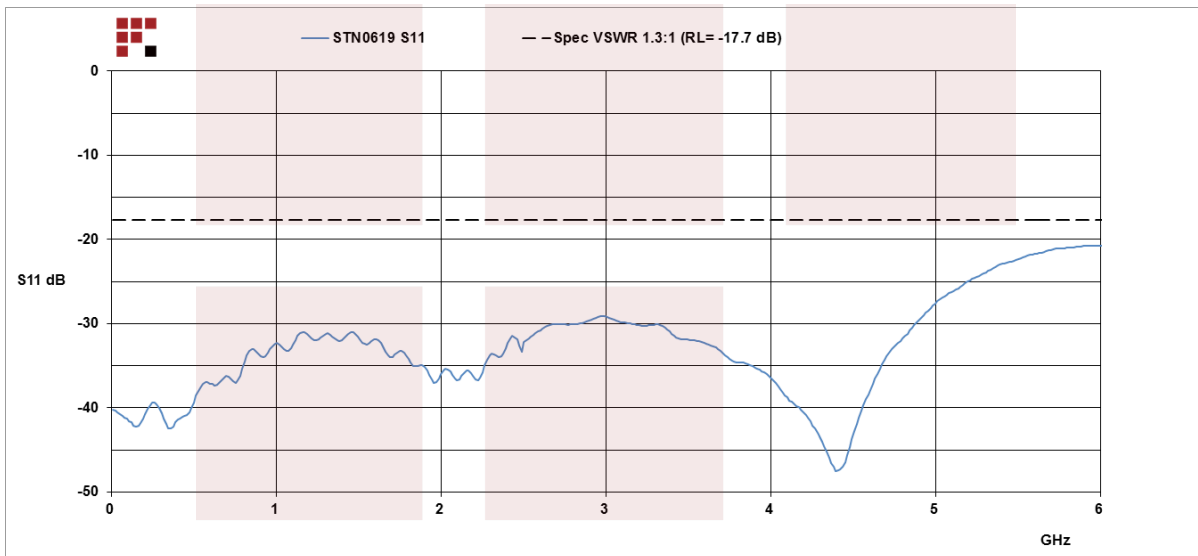


RF Load 2 Watts To 6 GHz Tri-Metal Plated Brass RP N Male from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [RF Load 2 Watts To 6 GHz Tri-Metal Plated Brass RP N Male STN0619](#)

URL: <https://www.fairviewmicrowave.com/rf-load-2-watts-6-ghz-n-male-stn0619-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

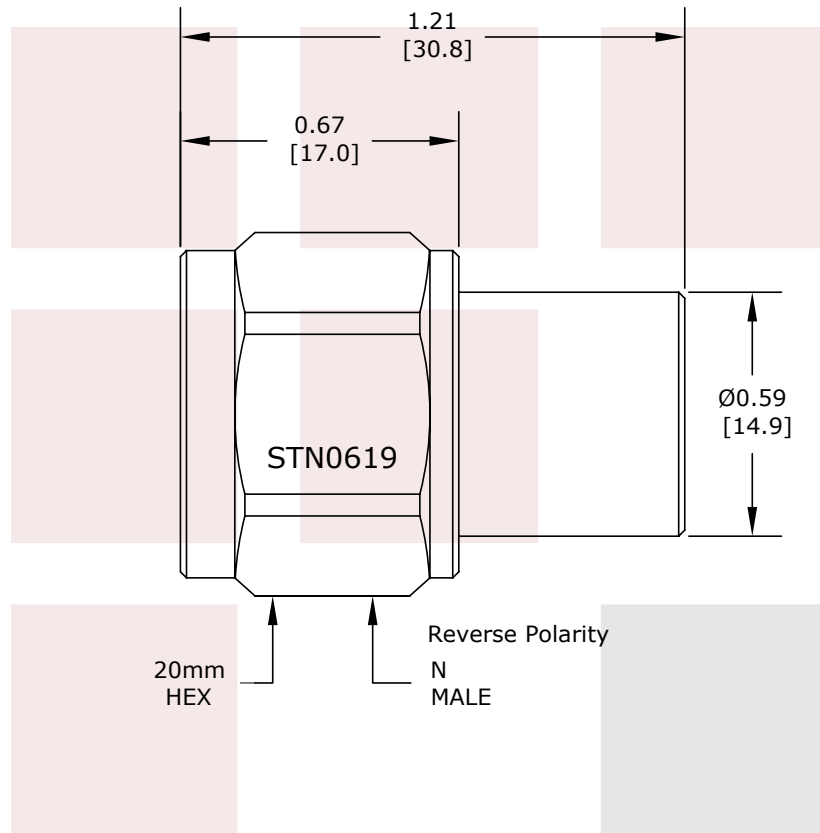

STANDARD TOLERANCES	
DECIMAL	
.XX	±0.20
.XXX	±0.10

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		DWG NO		CAGE CODE	
TITLE RF Load 2 Watts To 6 GHz Tri-Metal Plated Brass RP N Male		STN0619		3FKR5	
		CAD FILE	SHEET	SCALE	SIZE
		062816		N/A	3045