

## WR-187 Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz, 20 dBi Nominal Gain, CMR-187 Flange, ProLine

The Pro-series WR-187 FM9861B-20 standard gain horn antenna (also known as waveguide horn) from Fairview Microwave has a nominal gain of 20 dBi. The Fairview Microwave 20 dBi WR-187 horn antenna operates from 3.95 GHz to 5.85 GHz. This WR-187 standard gain horn has a CMR-187 type flange. The WR-187 FM9861B-20 waveguide horn is part of over 40,000 RF, microwave and millimeter wave components available from Fairview Microwave. Waveguide standard gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance. The Pro-series gain horns are US made and TAA compliant. Fairview Microwave's WR-187 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and rectangular input. Pro-series WR-187 standard gain horn antenna can ship the same day to anywhere in the world.

### Configuration

Design	WR-187 Standard Gain Horn
Pattern	Directional
Polarization	Linear

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	3.95		5.85	GHz
Nominal Gain		20		dB
VSWR		1.5:1		

### Mechanical Specifications

<b>Size</b>	
Length	15.68 in [398.27 mm]
Width/Diameter	8.92 in [226.57 mm]
Height	6.53 in [165.86 mm]

#### Waveguide Interface

Waveguide Size	WR-187
Flange Type	CMR-187
Body Material and Plating	Aluminum

z

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:



### Features:

- WR-187 Rectangular Waveguide Interface
- 3.95 GHz to 5.85 GHz
- 20 dBi Nominal Gain
- CMR-187 Cover Flange

### Applications:

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio System

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)


WR-187 Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz, 20 dBi Nominal Gain, CMR-187 Flange, ProLine from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-187 Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz, 20 dBi Nominal Gain, CMR-187 Flange, ProLine FM9861B-20](#)

URL: <https://www.fairviewmicrowave.com/wr-187-waveguide-standard-gain-horn-20-db-fm9861b-20-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



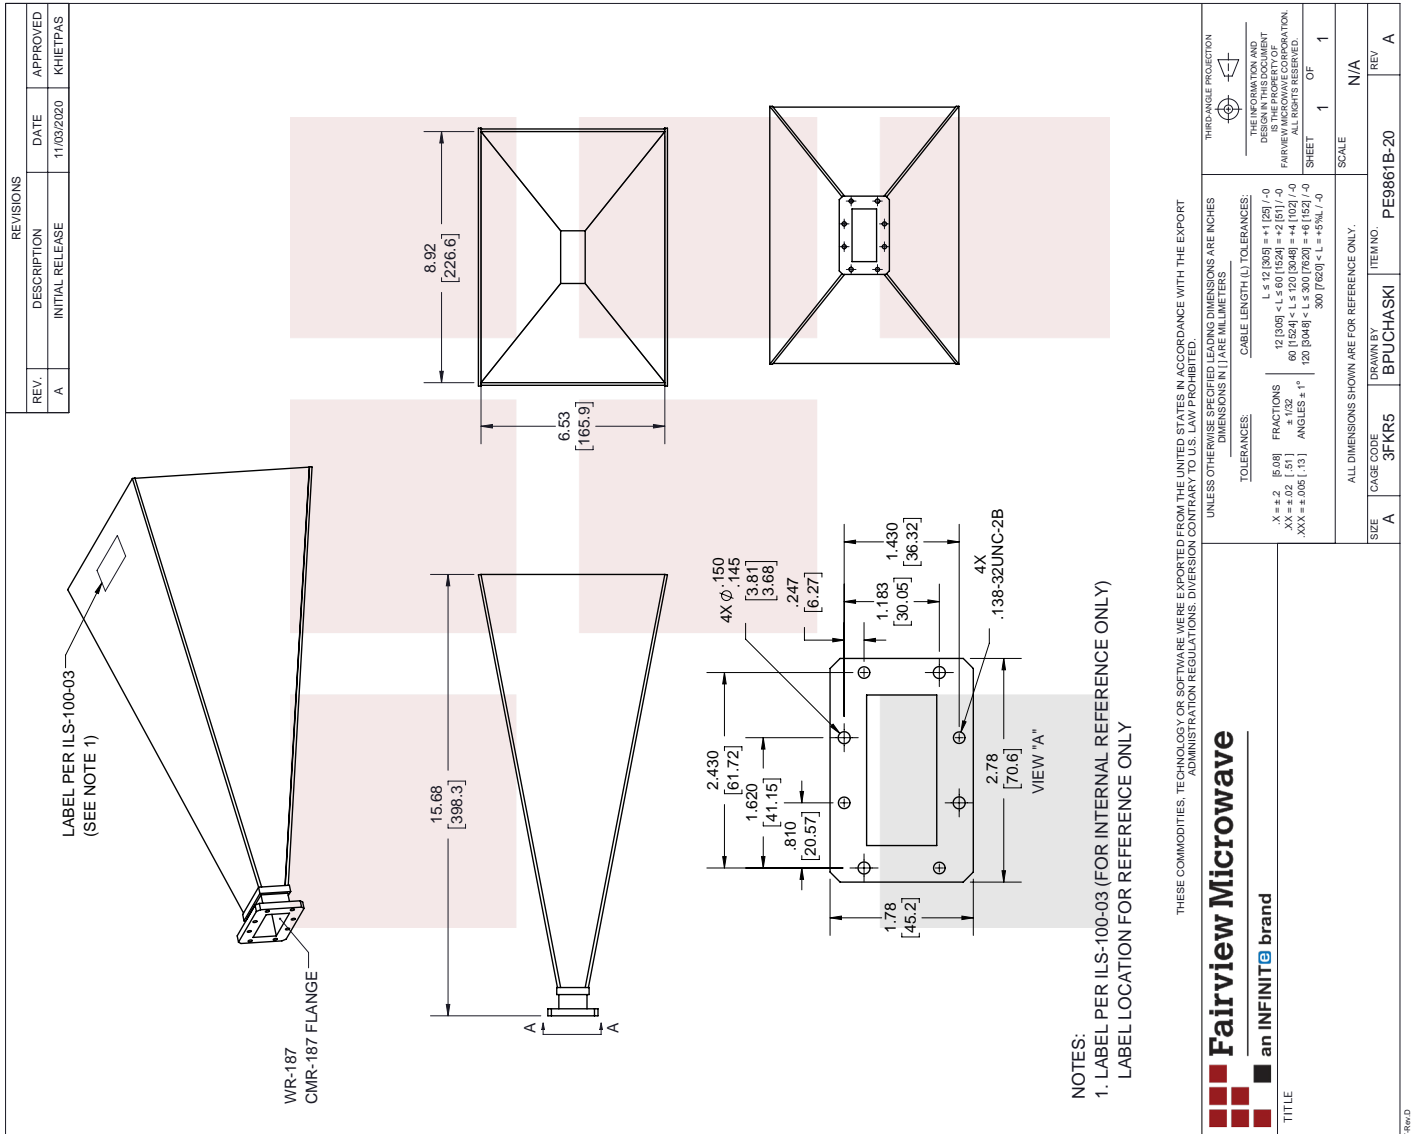

WR-187 Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz, 20 dBi Nominal Gain, CMR-187 Flange, ProLine