

Engineering Grade 3.5mm Female (Jack) to 3.5mm Female (Jack) Adapter with Stainless Steel Body

3.5mm female to 3.5mm female adapter part number FMAD1613 from Fairview Microwave is in-stock and ships same day. This Fairview 3.5mm to 3.5mm adapter has a female to female gender configuration and is built of durable stainless steel in an engineering grade design. FMAD1613 3.5mm female to 3.5mm female adapter operates to 26.5 GHz. The 3.5mm connector mates mechanically with commercially available SMA and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		26.5	GHz
VSWR		1.25:1		
DWV (AC)			1,000	Vrms
Insulation Resistance	5,000			MOhms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 1	1 to 4	4 to 8	8 to 12	12 to 26.5	GHz
Insertion Loss, Max	0.05	0.1	0.141	0.173	0.257	dB

Electrical Specification Notes:
 Values at sea level

Mechanical Specifications

Size	
Length	0.82 in [20.90 mm]
Width	0.31 in [7.90 mm]
Height	0.31 in [7.90 mm]
Weight	0.01 lbs [2.72 g]

Description	Connector 1	Connector 2
Type	3.5mm Female	3.5mm Female
Polarity	Standard	Standard
Mating Cycles, Min	500	
Mating Torque	7.1 to 9.7 in-lbs [0.80 to 1.10 Nm]	7.1 to 9.7 in-lbs [0.80 to 1.10 Nm]
Contact Retention Force, Min	60.7 lbs [27.53 kg]	60.7 lbs [27.53 kg]
Contact Captivation Axial Force, Min	6.1 lbs [2.77 kg]	6.1 lbs [2.77 kg]
Coupling Proof Torque	15 in-lbs [1.7 Nm]	15 in-lbs [1.7 Nm]



Configuration:

- 3.5mm Female Connector 1
- 3.5mm Female Connector 2
- 50 Ohm
- Engineering Grade Design
- Straight Body Geometry

Features:

- Gold Plated Beryllium Copper Contact
- Max VSWR of 1.25:1 up to 26.5 GHz

Applications:

- General Purpose Test

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Material Specifications

Description	Connector 1	Connector 2
Type	3.5mm Female	3.5mm Female
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold	Gold
Insulation Material	PPO	PPO
Outer Contact Material	Beryllium Copper	Beryllium Copper
Outer Contact Plating	Gold	Gold
Body Material	Stainless Steel	Stainless Steel
Body Plating	Passivated Stainless Steel	Passivated Stainless Steel

Environmental Specifications
Temperature

Operating Range

-55 to +105 deg C

Humidity

MIL-STD-202, Method 206

Thermal Shock

MIL-STD-202, Method 107, Condition B

Salt Spray

MIL-STD-202, Method 101, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Engineering Grade 3.5mm Female (Jack) to 3.5mm Female (Jack) Adapter with Stainless Steel Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Engineering Grade 3.5mm Female \(Jack\) to 3.5mm Female \(Jack\) Adapter with Stainless Steel Body FMAD1613](#)

URL: <https://www.fairviewmicrowave.com/3-5mm-female-to-3-5mm-female-adapter-mil-std-202-method-206-stainless-steel-engineering-grade-fmad1613-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

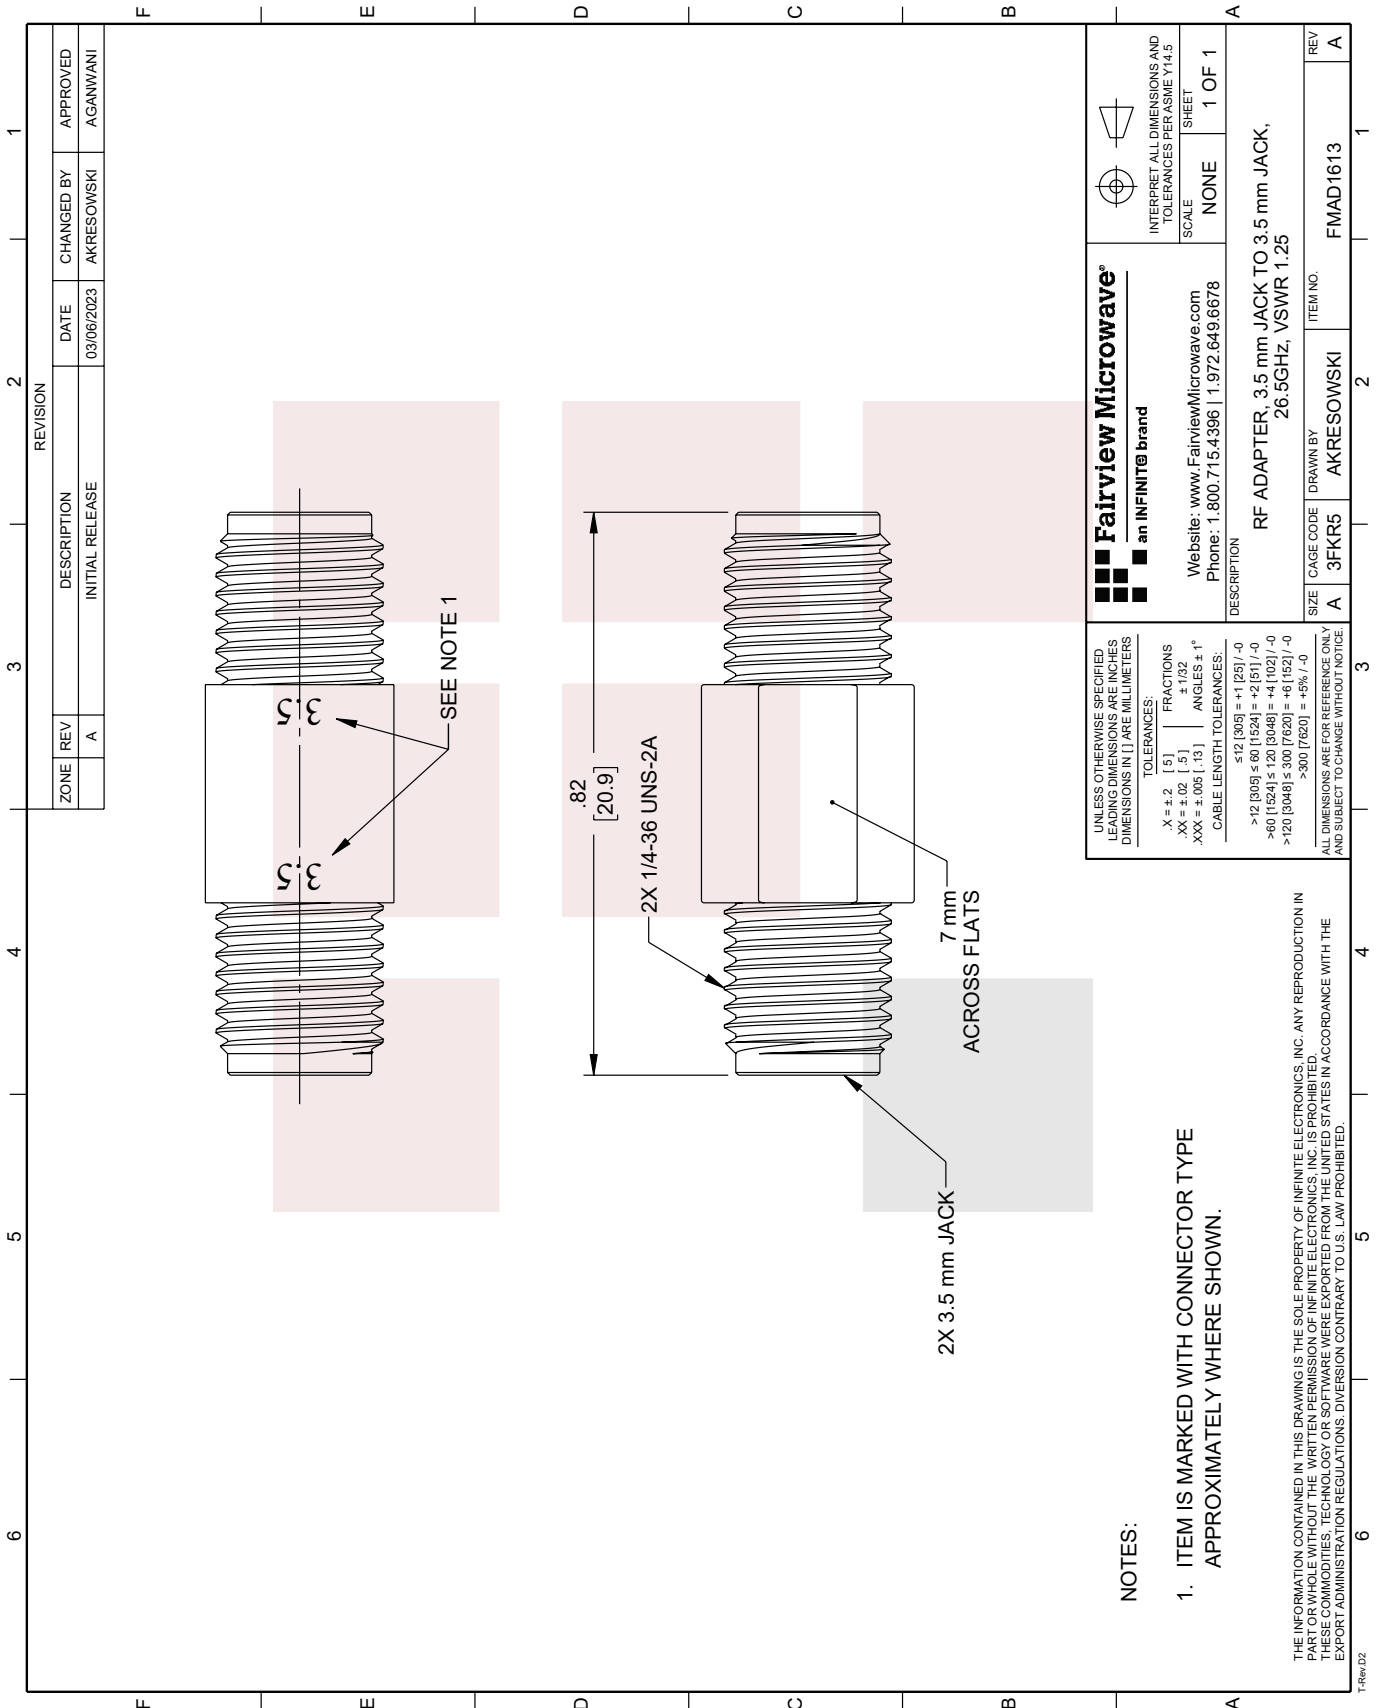

ZONE		REVISION		DATE		APPROVED	
A	REV	DESCRIPTION	CHANGED BY	DATE	CHANGED BY	APPROVED	
	A	INITIAL RELEASE	AKRESOWSKI	03/06/2023	AKRESOWSKI	AGANWANI	

<p>Fairview Microwave® an INFINITE® brand</p> <p>Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678</p>		<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>	
<p>UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>.X = ±.2 [.5] FRACTIONS ± 1/32</p> <p>.XX = ±.02 [.5] ANGLES ± 1°</p> <p>.XXX = ±.005 [.13] CABLE LENGTH TOLERANCES:</p> <p>≤ 12 [305] = +1 [25] / -0</p> <p>> 12 [305] ≤ 60 [1524] = +2 [51] / -0</p> <p>> 60 [1524] ≤ 120 [3048] = +4 [102] / -0</p> <p>> 120 [3048] ≤ 300 [7620] = +6 [152] / -0</p> <p>> 300 [7620] = +5% / -0</p>		<p>DESCRIPTION</p> <p>RF ADAPTER, 3.5 mm JACK TO 3.5 mm JACK, 26.5GHz, VSWR 1.25</p>	
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	3FKR5	AKRESOWSKI	FMAD1613
REV			A

- NOTES:
1. ITEM IS MARKED WITH CONNECTOR TYPE APPROXIMATELY WHERE SHOWN.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.