

Low PIM 10 dB Fixed Attenuator 4.3-10 Female (Jack)
to 4.3-10 Female (Jack) 0.6 GHz to 6 GHz Rated
to 100 Watts Anodized Aluminum 1.3:1 VSWR



FMAT7483-10

Features

- 0.6 to 6 GHz Frequency Range
- 4.3-10 Connectorized Design
- Attenuation 10 dB \pm 2 dB
- Max Power 100 Watt (CW)
- Typical VSWR of 1.3:1
- PIM rating -168 dBc typical

Applications

- Instrumentation
- Precision Measurements
- Prototyping and Characterization
- Production Systems

Description

Fairview Microwave carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The 10 dB Fixed Attenuator FMAT7483-10 is rated to 100 Watts and operates from 0.6 to 6 GHz. The fixed attenuator offers 1.3:1 VSWR and low PIM (passive intermodulation) rating of -168 dBc typical. The versatile coaxial package uses 4.3-10 female to 4.3-10 female connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.6		6	GHz
Impedance		50		Ohms
Nominal Attenuation		10		dB
Attenuation Accuracy		2		dB
VSWR		1.3:1		
Passive Intermodulation		-168	-160	dBc
2x43dBm				
Input Power, CW			100	Watts
Input Power, Peak			1	kWatts
8% duty cycle, 20us PW				

Mechanical Specifications

Size

Length	6.69 in [169.93 mm]
Width/Diameter	5.12 in [130.05 mm]
Height	2.8 in [71.12 mm]
Weight	1.88 lbs [852.75 g]
Body Material and Plating	Black Anodized Aluminum Heatsink

Configuration

Design	Fixed, Directional
--------	--------------------

Low PIM 10 dB Fixed Attenuator 4.3-10 Female (Jack) to 4.3-10 Female (Jack) 0.6 GHz to 6 GHz Rated to 100 Watts Anodized Aluminum 1.3:1 VSWR



FMAT7483-10

Design Type	Low PIM
Package Style	Connectorized

Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Female	4.3-10 Female
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

Environmental Specifications

Temperature

Operating Range	-40 to +75 deg C
Storage Range	-50 to +85 deg C
Humidity	<95%
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6-Fc
Altitude	<5000m
Thermal Shock	IEC 60068 -2-14-Na

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

Low PIM 10 dB Fixed Attenuator 4.3-10 Female (Jack) to 4.3-10 Female (Jack) 0.6 GHz to 6 GHz Rated to 100 Watts Anodized Aluminum 1.3:1 VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [Low PIM 10 dB Fixed Attenuator 4.3-10 Female \(Jack\) to 4.3-10 Female \(Jack\) 0.6 GHz to 6 GHz Rated to 100 Watts Anodized Aluminum 1.3:1 VSWR FMAT7483-10](#)

URL: <https://www.fairviewmicrowave.com/10db-fixed-attenuator-4.3-10-female-4.3-10-female-100-watts-fmat7483-10-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

FMAT7483-10 CAD Drawing

Low PIM 10 dB Fixed Attenuator 4.3-10 Female (Jack) to 4.3-10 Female (Jack)
0.6 GHz to 6 GHz Rated to 100 Watts Anodized Aluminum 1.3:1 VSWR

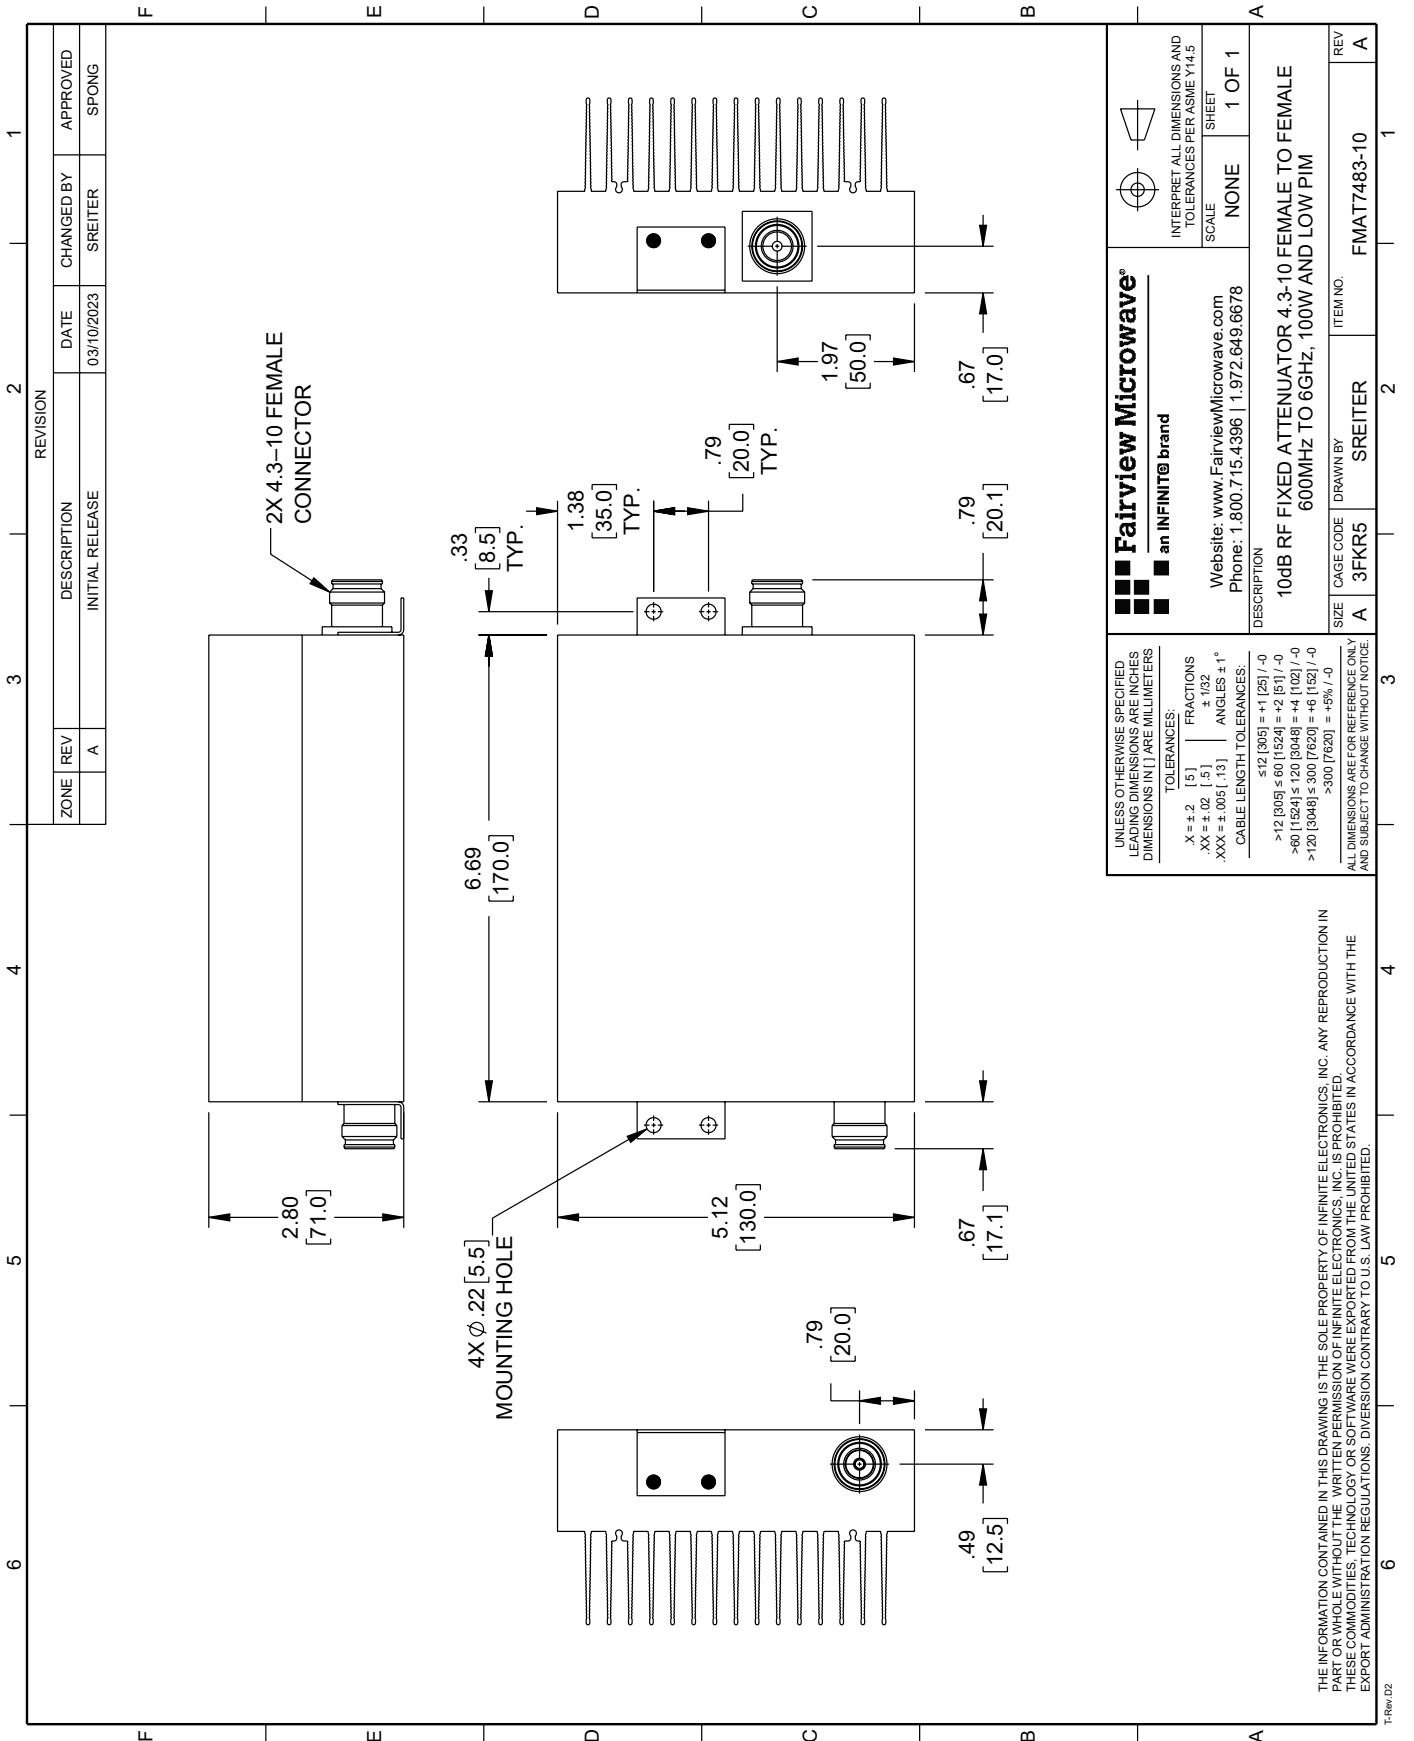

ZONE		REVISION		CHANGED BY		APPROVED	
	REV	DESCRIPTION	DATE				
	A	INITIAL RELEASE	03/10/2023	SREITER		SPONG	

Fairview Microwave
an INFINIT® brand

Website: www.FairviewMicrowave.com
Phone: 1.800.715.4396 | 1.972.649.6678

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [.5] ±.132
.XXX = ±.005 [0.13] ANGLES ±1°
CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +8 [152] / -0
>300 [7620] = +8% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
SCALE NONE
SHEET 1 OF 1

DESCRIPTION
10dB RF FIXED ATTENUATOR 4.3-10 FEMALE TO FEMALE
600MHz TO 6GHz, 100W AND LOW PIM

SIZE A CAGE CODE 3FKR5 DRAWN BY SREITER ITEM NO. FMAT7483-10 REV A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TRev_02