



# SMA Male to RA SMA Male Cable FM086FLEX Coax with LF Solder

The SMA male to RA SMA male cable using FM086FLEX coax, part number FMCA1040, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to male gender configuration with 50 ohm. flexible FM086FLEX coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1040 SMA male to SMA male cable assembly operates to 27 GHz. The right angle SMA interface on the FM086FLEX cable allows for easier connections in tight spaces. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB. Our new series of flexible cables use high performance FM086FLEX coax and are terminated with a new low profile connector design. These high performance flexible cables are an ideal choice for many applications including in-rack RF devices where tight bends and continual flexure might be required. Our FM086FLEX is a flexible coax alternative to semirigid coax and has a solid PTFE resulting in a 69.5% phase velocity. This series features a smooth wall formed by the braid-over-sprial-ribbon design and has similar performance to a solid wall RG405 semi-rigid RG405 cable.

These FM086FLEX cables are similar to our existing SCA1814 cables. The heavier duty SCA1814 test cables have similar electrical performance, but include a heavy duty strain relief mechanism and extra booting material as well as a thick wall SMA connector to increase the ruggedness of the SCA1814 cables for use in more demanding test environments.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

## **Electrical Specifications**

		_			
Description	Min	Тур	Max	Units	
Frequency Range	DC		27	GHz	
VSWR			1.4:1		
Return Loss			15.56	dB	
Velocity of Propagation		69.5		%	
RF Shielding	90			dB	
Group Delay		1.47 [4.82]		ns/ft [ns/m]	
Capacitance		29.4 [96.46	]	pF/ft [pF/m]	
Operating Voltage (AC)			250	Vrms	

#### **Performance by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	3	6	12	18	27	GHz
Insertion Loss (Max.)	0.6	0.86	1.22	1.52	1.86	dB/ft
	1.97	2.82	4	4.99	6.1	dB/m



## **Configuration:**

- SMA Male
- SMA Male Right Angle
- FM086FLEX

#### Features:

- Max Frequency 27 GHz
- Shielding Effectivity > 90 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket
- 500 Mating Cycles
- Low Profile Right Angle SMA Design operates to 27 GHz
   Typical Right Angle SMA VSWR less than 1.22:1 to 27 GHz
   Shielding effectivity > 90dB
   One time minimum bend radius: 0.24 inch

### **Applications:**

- General Purpose
- Laboratory Use
- High Performance RF equipment interconnect
- Flexible in cabinet or in the rack requirements
- Inside the box RF routing
- General purpose lighter duty lab use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





VSWR (Max.)	1.08:1	1.12:1	1.2:1	1.3:1	1.4:1	
Power Handling (Max	(.) 81	50	40	33	26	W

#### **Mechanical Specifications**

**Cable Assembly** 

Length\* 0 in [0 mm]

Cable

Cable Type FM086FLEX Impedance 50 Ohms

Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type PTFE Number of Shields 2

Shield Layer 1 Silver Plated Copper Tape
Shield Layer 2 Silver Plated Copper Braid
Outer Conductor Material and Plating Silver Plated Copper Tape

Outer Conductor Material and Plating

Silver Plated Copper Tape
FEP

FEP

Jacket Diameter 0.104 in [2.64 mm]

One Time Minimum Bend Radius Repeated Minimum Bend Radius

0.23 in [5.84 mm] 0.78 in [19.81 mm]

#### **Connectors**

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material & Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material & Plating	Stainless Steel, Gold	Stainless Steel, Gold
Coupling Nut Material & Pla	iting Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 Inch	5/16 Inch

## **Environmental Specifications Temperature**

Operating Range -40 to +150 deg C

**Compliance Certifications** (see product page for current document)

**Plotted and Other Data** 

Notes:

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2020 REV 1.2 Page 2 of 4





#### **How to Order**

Part Number Configuration:	FMCA1040	- xx	uu	
			l	cm = Centimeters <blank> = Inches Length</blank>

Example: FMCA1040-12 = 12 inches long cable

FMCA1040-100cm = 100 cm long cable

SMA Male to RA SMA Male Cable FM086FLEX Coax with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male to RA SMA Male Cable FM086FLEX Coax with LF Solder FMCA1040


URL: https://www.fairviewmicrowave.com/sma-male-ra-sma-male-cable-fm086flex-coax-fmca1040-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





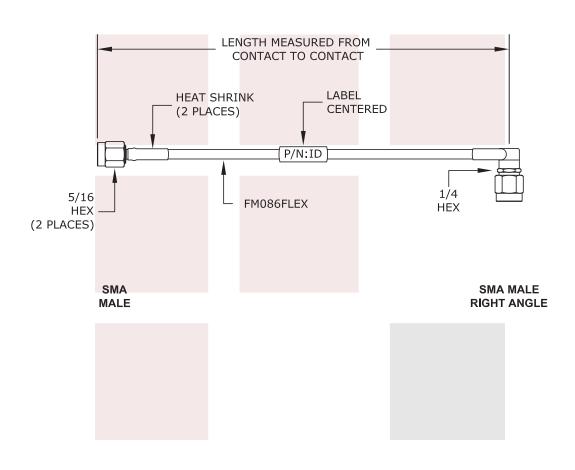

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
SMA Male to RA SMA Male Cable FM086FLEX Coax	DWG NO FMCA1040			CAGE CODE 3FKR5		
with LF Solder	CAD FILE 031715	SHEET	SCALE	≣ N/A	SIZE A	150