



# Low Loss 2.92mm Male to 2.92mm Male Cable 086 Coax

The 2.92mm male to 2.92mm male cable using 086 coax, part number FMCA2093, from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid FM-SR086CUTNLL coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2093 2.92mm male to 2.92mm male cable assembly operates to 45 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

# **Electrical Specifications**

Description	Min	Т	ур	Max	Units
Frequency Range	DC			45	GHz
VSWR				1.4:1	
Velocity of Propagation		76.5		%	

# Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	5	10	18	26.5	GHz
Insertion Loss (Max.)	0.12	0.39	0.56	0.77	0.96	dB/ft
	0.39	1.28	1.84	2.53	3.15	dB/m
Insertion Loss (Typ.)	0.12	0.39	0.56	0.77	0.96	dB/ft
	0.39	1.28	1.84	2.53	3.15	dB/m

#### **Electrical Specification Notes:**

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.04\*SQRT(FGHz) dB per connector.

## **Mechanical Specifications**

## **Cable Assembly**

Diameter 0.35 in [8.89 mm]

#### Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Outer Conductor Material and Plating

FM-SR086CUTNLL 50 Ohms Solid Copper, Silver Microporous PTFE 1

Copper, Tin



# **Configuration:**

- 2.92mm Male
- 2.92mm Male
- FM-SR086CUTNLL

## Features:

- Max Frequency 45 GHz
- 76.5% Phase Velocity
- 500 Mating Cycles
- Maximum Cable Assembly Length of 5 Feet

# **Applications:**

- · General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





One Time Minimum Bend Radius

0.25 in [6.35 mm]

#### **Connectors**

Description		Connector 1 Connector 2			or 2			
Туре		2.92mm Male			2.92mm Male			
Impedance		50 Ohms			50 Ohms			
Mating Cycles		500			500			
Contact Material & Plating	Ben	Beryllium Copper, Gold			old Beryllium Copper, Gold			
Contact Plating Spec.		ASTM-B488			ASTM-B488			
Dielectric Type		PTFE			PTFE			
Body Material & Plating	Ber	Beryllium Copper, Gold		old	Beryllium Copper, Gold			
Body Plating Spec.		ASTM-B	488		ASTM-B4	88		
Coupling Nut Material & Pla	ting	Steel			Steel			
Torque	8	in-lbs 0.	9 Nm		8 in-lbs 0.9	Nm		

## **Environmental Specifications**

**Temperature** 


Operating Range -65 to +165 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

## **How to Order**

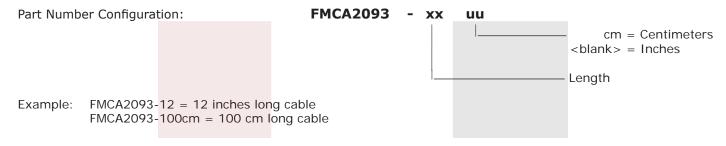

Low Loss 2.92mm Male to 2.92mm Male Cable 086 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Low Loss 2.92mm Male to 2.92mm Male Cable 086 Coax FMCA2093


URL: https://www.fairviewmicrowave.com/low-loss-2.92mm-male-2.92mm-male-cable-086-coax-fmca2093-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





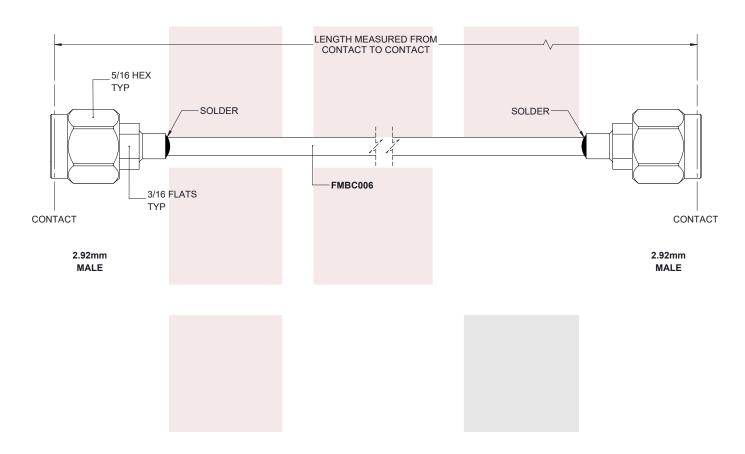

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

Fairview Microwave	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
Low Loss 2.92mm Male to 2.92mm Male Cable 086 Coax	DWG NO FMCA2093				CAGE CODE 3FKR5		
	CAD FILE 09/11/19	SHEET 1 OF 1	SCAL	E N/A	SIZE A	7361	