



2.92mm Male to 2.92mm Male Cable .118 Coax

The 2.92mm male to 2.92mm male cable using .118 coax, part number FMCA2094, from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid FM-SR118CU-COIL coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2094 2.92mm male to 2.92mm male cable assembly operates to 45 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Min | T | ур | Max | Units |
|-----------------|-----|---|----|-------|-------|
| Frequency Range | DC | | | 45 | GHz |
| VSWR | | | | 1.4:1 | |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|-------|-------|----|----|-------|
| Frequency | 1 | 10 | 20 | | | GHz |
| Insertion Loss (Max.) | 0.125 | 0.425 | 0.625 | | | dB/ft |
| | 0.41 | 1.39 | 2.05 | | | dB/m |
| Insertion Loss (Typ.) | 0.125 | 0.425 | 0.625 | | | dB/ft |
| | 0.41 | 1.39 | 2.05 | | | dB/m |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.04*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly

Diameter 0.35 in [8.89 mm]

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1

One Time Minimum Bend Radius

FM-SR118CU-COIL 50 Ohms Solid Copper, Silver PTFE (LD) Copper

0.4 in [10.16 mm]



Configuration:

- 2.92mm Male
- 2.92mm Male
- FM-SR118CU-COIL

Features:

- Max Frequency 45 GHz
- 500 Mating Cycles

Applications:

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

sales@fairviewmicrowave.com





Connectors

| Connector 1 | Connector 2 | | | |
|----------------------|--|--|--|--|
| 2.92mm Male | 2.92mm Male | | | |
| 50 Ohms | 50 Ohms | | | |
| 500 | 500 | | | |
| Beryllium Copper, Go | old Beryllium Copper, Gold | | | |
| ASTM-B488 | ASTM-B488 | | | |
| PTFE | PTFE | | | |
| Beryllium Copper, Go | old Beryllium Copper, Gold | | | |
| ASTM-B488 | ASTM-B488 | | | |
| Steel | Steel | | | |
| 8 in-lbs 0.9 Nm | 8 in-lbs 0.9 Nm | | | |
| | 2.92mm Male 50 Ohms 500 Beryllium Copper, Go ASTM-B488 PTFE Beryllium Copper, Go ASTM-B488 Steel | | | |

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range


-55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

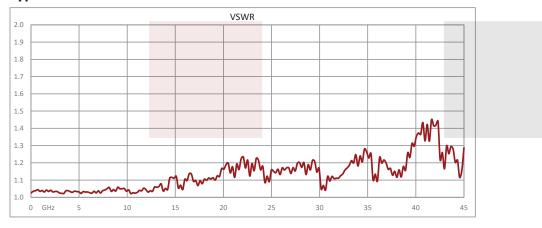

How to Order

Part Number Configuration:



Example: FMCA2094-12 = 12 inches long cable

FMCA2094-100cm = 100 cm long cable

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2019

REV 1.0 Page 2 of 4

^{*}All cable assemblies have a length tolerance of 1.5% or \pm 3/8", whichever is greater.





2.92mm Male to 2.92mm Male Cable .118 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: 2.92mm Male to 2.92mm Male Cable .118 Coax FMCA2094

URL: https://www.fairviewmicrowave.com/2.92mm-male-2.92mm-male-cable-.118-coax-fmca2094-p.aspx







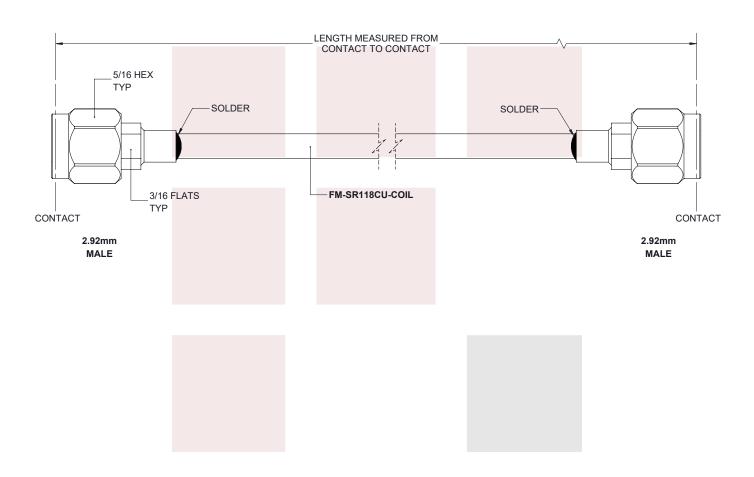

STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| Fairview Microwave | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | | |
|--|---|--------------|-------|-------|-----------------|------|--|
| TITLE | DWG NO FMCA2094 | | | | CAGE CODE 3FKR5 | | |
| 2.92mm Male to 2.92mm Male Cable .118 Coax | CAD FILE 09/11/19 | SHEET 1 OF 1 | SCALE | E N/A | SIZE A | 7361 | |