

## FMCA2680-50CM DATA SHEET

# N Female to BNC Male Cable in 50 CM Length Using RG223 Coax

The type N female to BNC male cable using RG223 coax, part number FMCA2680-50CM, from Fairview Microwave is in-stock and ships same day. This Fairview type N to BNC cable assembly has a female to male gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA2680-50CM type N female to BNC male cable assembly operates to 4 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### **Electrical Specifications**

Description	Min	Т	ур	Max	U	nits
Frequency Range	DC			4	(	GHz
VSWR				1.4:1		
Velocity of Propagation		(	66			%
Capacitance		30.8 [101.05] p		pF/ft	[pF/m]	
Operating Voltage (AC)				500	V	rms

#### **Performance by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.27	0.31	0.35	0.42	0.68	dB/ft
	0.89	1.02	1.15	1.38	2.23	dB/m

#### **Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

#### **Mechanical Specifications**

#### **Cable Assembly**

Length\* 19.68 in [499.87 mm] Weight 0.1269 lbs [57.56 q]

#### **Cable**

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1

RG223 50 Ohms Solid Copper, Silver

PE ...

Silver Plated Copper Braid



## **Configuration:**

- N Female
- BNC Male
- RG223

#### **Features:**

- Max Frequency 4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

## **Applications:**

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Shield Layer 2 Silver Plated Copper Braid

Jacket Material PVC, Black

Jacket Diameter 0.21 in [5.33 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

#### **Connectors**

Description	Description Connector 1	
Туре	N Female	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Brass, Gold	Brass, Gold
Contact Plating Spec.	30μ in. minimum	30µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material & Plating	Brass, Nickel	Brass, Nickel
Body Plating Spec.	100μ in. minimum	n 100µ in. minimum


**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:

• Values at 25°C, sea level.

#### **How to Order**

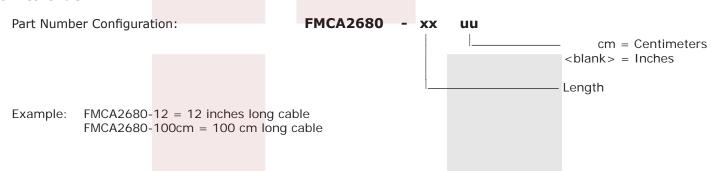

N Female to BNC Male Cable in 50 CM Length Using RG223 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Female to BNC Male Cable in 50 CM Length Using RG223 Coax FMCA2680-50CM

URL: https://www.fairviewmicrowave.com/n-female-to-bnc-male-cable-rg223-coax-in-50-cm-and-rohs-fmca2680-50cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





