



# WR-75 Waveguide Termination 2 Watts With a 10 GHz to 15 GHz Frequency Range

### **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	10		15	GHz
VSWR			1.04:1	
Input Power (CW)			2	Watts
Input Power (Peak)			2	KWatts



## **Mechanical Specifications**

Size

 Length
 5 in [127 mm]

 Width/Dia.
 1.5 in [38.1 mm]

 Height
 1.5 in [38.1 mm]

Weight 0.17108 lbs [77.6 g]

Description	Flange	Waveguide
Designation	None	WR-75
Туре	Square Cover	
Material	Aluminum	

## **Compliance Certifications** (visit www.FairviewMicrowave.com for current

document)

RoHS Compliant Yes

REACH Compliant 12/17/2015

#### **Plotted and Other Data**

Notes:

WR-75 Waveguide Termination 2 Watts With a 10 GHz to 15 GHz Frequency Range from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: WR-75 Waveguide Termination 2 Watts With a 10 GHz to 15 GHz Frequency Range STWR75

URL: https://www.fairviewmicrowave.com/wr-75-waveguide-termination-2-watts-from-10-15-ghz-stwr75-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





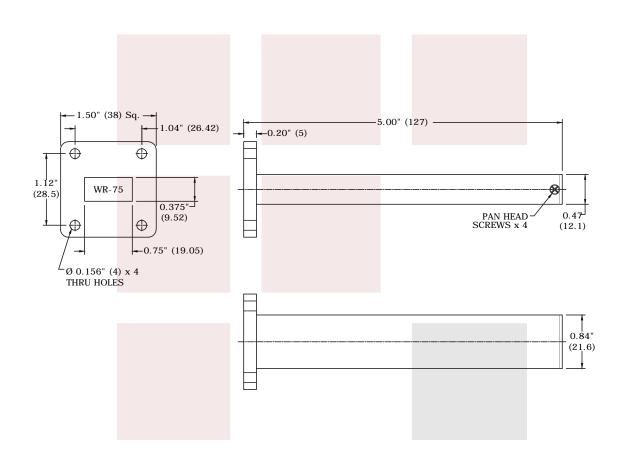

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
WR-75 Waveguide Termination 2 Watts With a 10 GHz to 15 GHz Frequency Range	DWG NO STWR75			CAGE CODE 3FKR5		
to 10 of 12 moquency manage	CAD FILE 011415	SHEET	SCALE N	/A SIZE A	5568	