

N Female Connector Crimp/Non-Solder Contact Attachment for LMR-240, LMR-240-DB, LMR-240-UF, LMR-240-FR, RG8X Cable

Times Microwave Systems Connector Specification

EZ-240-NF-X N female coaxial connector has an interface type of N female which is compatible with LMR-240, LMR-240-DB, LMR-240-UF, LMR-240-FR, and RG8X cables and a 50 Ohms impedance. Fairview Microwave's N female connector uses crimp/non-solder contact as an attachment method. Our female N coaxial connector operates at a maximum frequency of 6 GHz.

The Fairview Microwave N female coaxial connector has a teflon dielectric type and a VSWR of 1.3. Fairview Microwave's N coaxial connector has a brass body with tri-metal plating. Our EZ-240-NF-X N connector uses phosphor bronze contact. This threaded RF connector can operate at temperatures ranging from -55 to 155 degrees C. Additional RF connector specs and dimensions for this component can be found on its PDF specification datasheet and CAD drawings above.

The radio frequency connector is made from brass along with a contact life of 500 cycles or more. Our high-quality EZ-240-NF-X connector features an 80 µin minimum body plating specification. This N connector has a gold over nickel inner contact plating.

This Fairview Microwave female N connector will ship the same business day as purchased. Our N female connector is part of over 40,000 RF, microwave, and millimeter wave components in stock for worldwide shipment. For further information on similar products, our expert technical support and trained sales team can get you the ideal RF connector as per your requirements.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		6	GHz
VSWR			1.3:1	
DWV (DC)			1,000	Vdc
Insulation Resistance	5,000			MOhms

Mechanical Specifications

Size	
Length	1.395 in [35.43 mm]
Width/Dia.	0.622 in [15.80 mm]
Height	0.622 in [15.8 mm]
Weight	0.1 lbs [45.36 g]
Mating Cycles	500 Cycles

Material Specifications

Description	Material	Plating
Contact	Phosphor Bronze	Gold over nickel 50 µin minimum
Insulation	Teflon	
Body	Brass	Tri-Metal 80 µin minimum



Configuration:

- N Female Connector
- 50 Ohms
- Straight Body Geometry
- LMR-240, LMR-240-DB, LMR-240-UF, LMR-240-FR, RG8X Interface Type
- Crimp/Non-Solder Contact Attachment

Features:

- Operating Frequency of 6 GHz Max.
- Good VSWR of 1.3:1
- Gold over nickel Plated Phosphor Bronze Contact
- 50 µin minimum contact plating

Applications:

- General Purpose Test
- Custom Cable Assemblies

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Crimp Sleeve	Brass	Tri-Metal 80 µin minimum
--------------	-------	-----------------------------

Environmental Specifications

Temperature

Operating Range	-55 to +155 deg C
Shock	MIL-STD 202G, Meth.213, Cond I
Vibration	MIL-STD 202G, Meth.204, Cond.B
Thermal Shock	MIL-STD 202G, Meth.107, Cond.B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

N Female Connector Crimp/Non-Solder Contact Attachment for LMR-240, LMR-240-DB, LMR-240-UF, LMR-240-FR, RG8X Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [N Female Connector Crimp/Non-Solder Contact Attachment for LMR-240, LMR-240-DB, LMR-240-UF, LMR-240-FR, RG8X Cable EZ-240-NF-X](#)

URL: <https://www.fairviewmicrowave.com/n-female-lmr-240-lmr-240-db-lmr-240-uf-lmr-240-fr-rg8x-connector-ez-240-nf-x-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

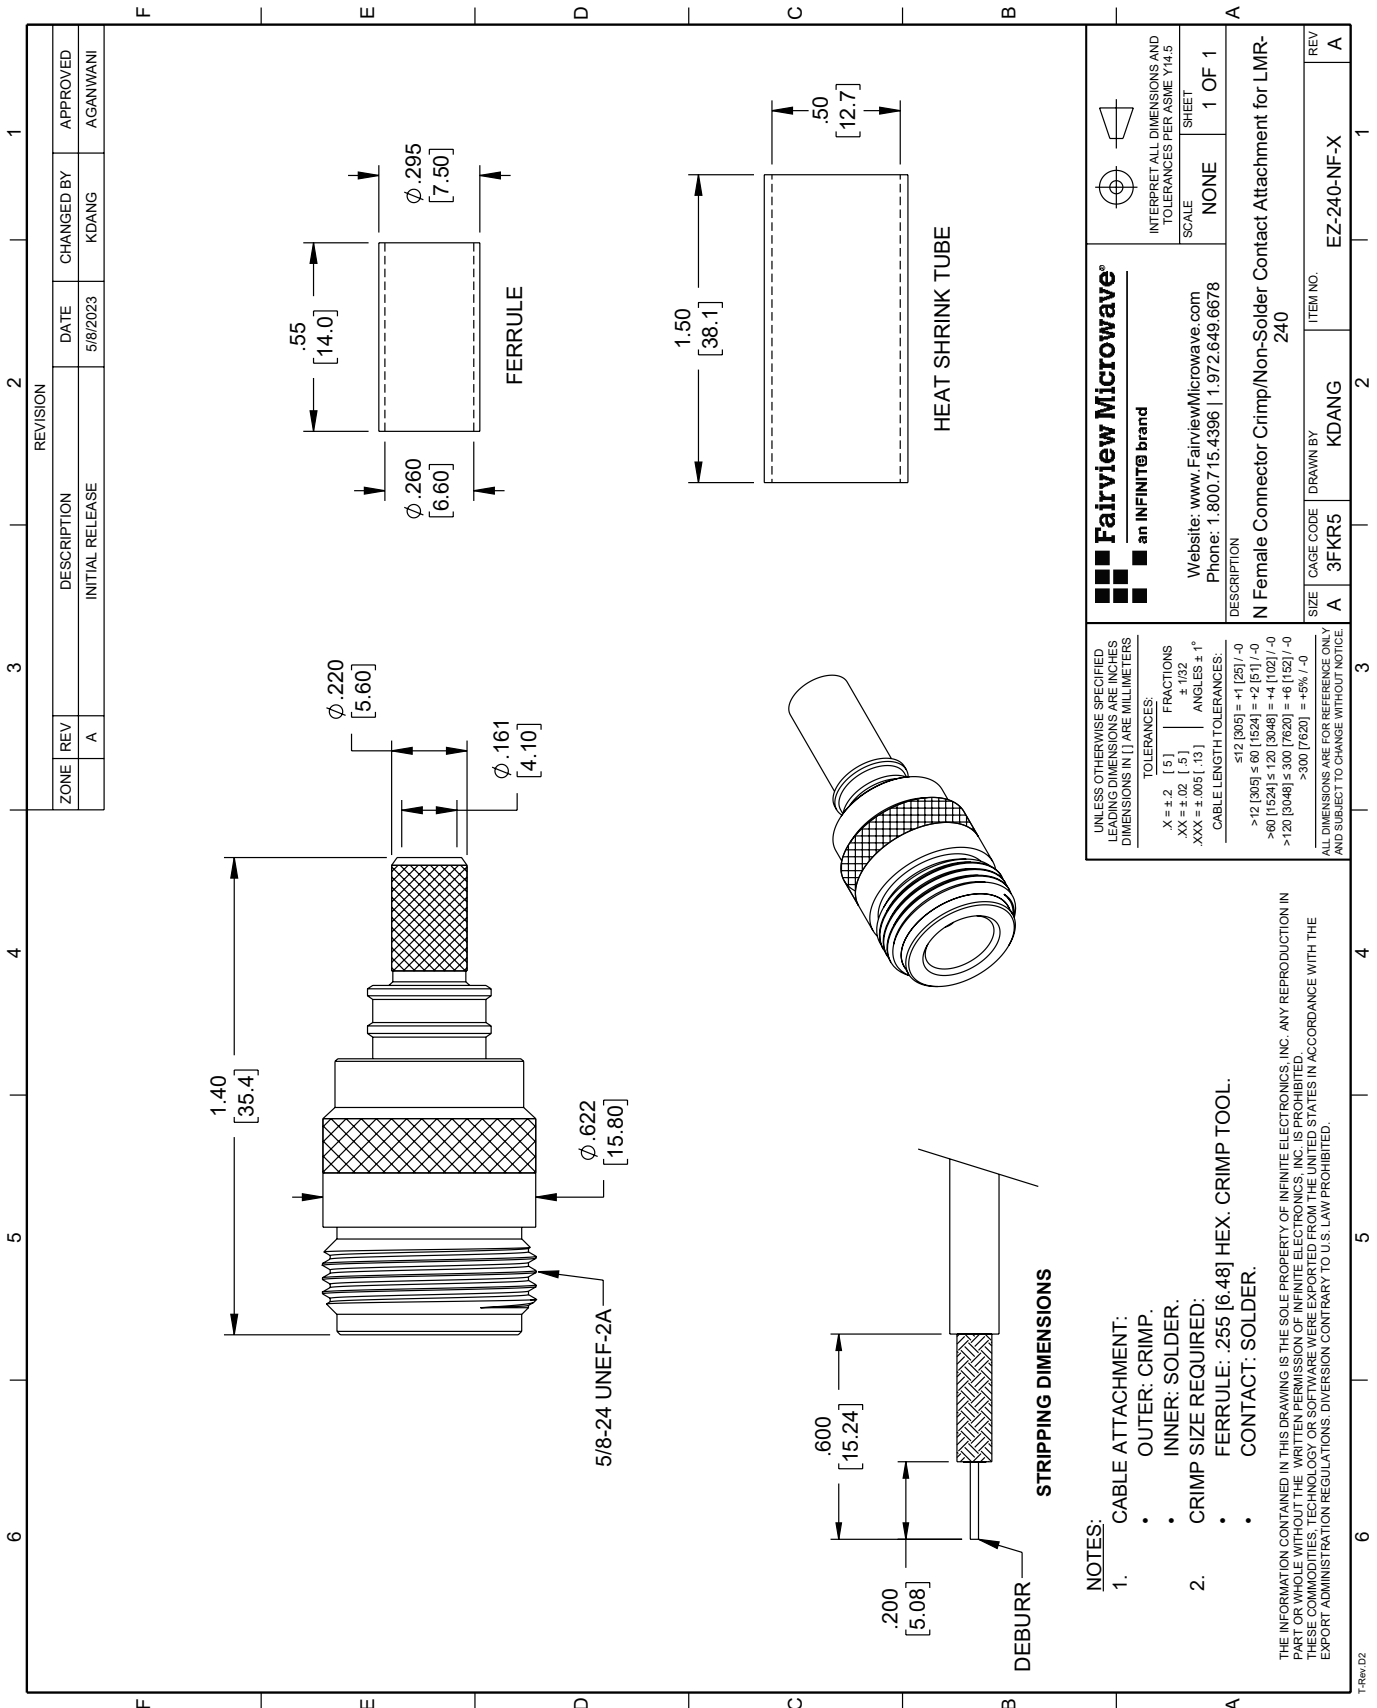

<p>Fairview Microwave® an INFINITE® brand</p> <p>Website: www.FairviewMicrowave.com Phone: 1.800.715.4396 1.972.649.6678</p>		<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>
<p>DESCRIPTION: N Female Connector Crimp/Non-Solder Contact Attachment for LMR-240</p>		
SIZE: A	CAGE CODE: 3FKR5	ITEM NO.: EZ-240-NF-X
REV: A	DRAWN BY: KDANG	REV: A

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X ± .2	[.5]	FRACTIONS
.XX ± .02	[.5]	± 1/32
.XXX ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤ 12 [305]	± 60 [1524]	= +2 [51] / -0
> 60 [1524]	± 120 [3048]	= +4 [102] / -0
> 120 [3048]	± 300 [7620]	= +6 [152] / -0
> 300 [7620]	± 600 [15240]	= +6% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS - DIVISION CONTRARY TO U.S. LAW PROHIBITED.