

2 Way Power Divider N Connectors From 2 GHz to 8 GHz Rated at 30 Watts

Fairview Microwave carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Fairview Microwave's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The MP8769 is a 2 way reactive power divider that operates from 2 to 8 GHz can handle up to 30 Watts (CW) with 1 dB max insertion loss and 15 dB min isolation. The package interface uses N female connectors.

Electrical Specifications

Design				Reactive
Number of Output Ports				2
Description	Min	Typ	Max	Units
Frequency Range	2		8	GHz
Impedance		50		Ohms
Input VSWR			1.45:1	
Output VSWR			1.35:1	
Insertion Loss			1	dB
Isolation	15			dB
Amplitude Balance			0.3	dB
Phase Balance			7	Degrees
Input Power (CW)			30	Watts

Electrical Specification Notes:
 Max input power rated for load VSWR better than 1.20:1.

Mechanical Specifications

Size	
Length	1.73 in [43.94 mm]
Width	2 in [50.8 mm]
Height	1 in [25.4 mm]
Weight	0.45371 lbs [205.8 g]

Configuration

Package Type	Connectorized
Input Connector	N Female
Output Connectors	N Female

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

Plotted and Other Data

Notes:



Features:


- 2-Way Power Divider
- Reactive Design
- 2 to 8 GHz Frequency Range
- Max Power 30 Watts (CW)
- Insertion Loss < 1 dB
- Isolation > 15 dB

Applications:

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

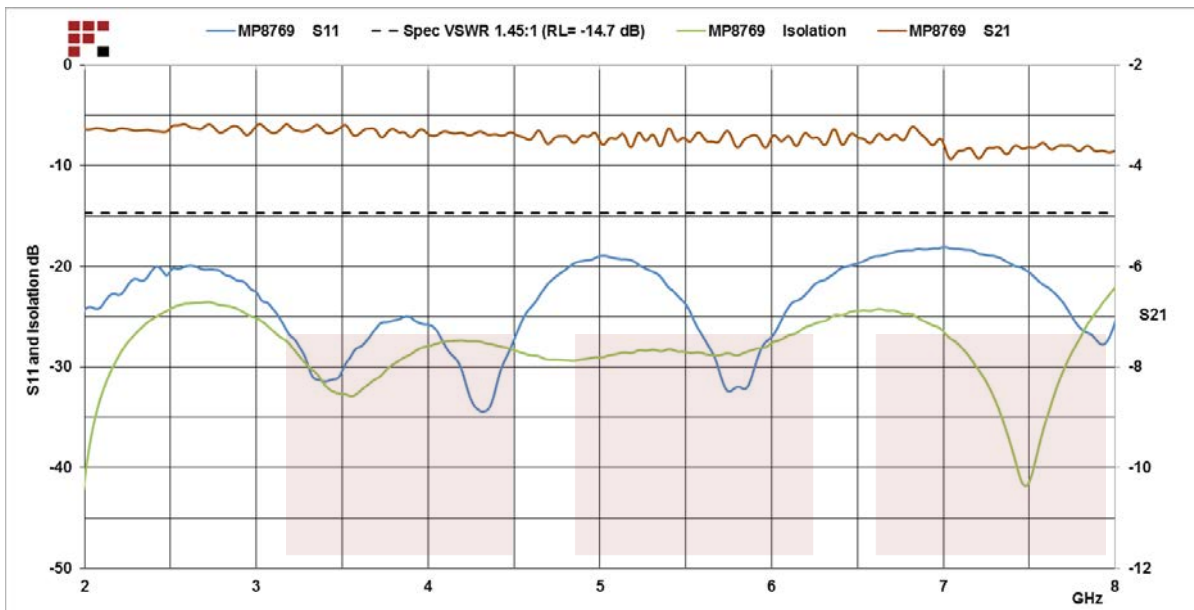


2 Way Power Divider N Connectors From 2 GHz to 8 GHz Rated at 30 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [2 Way Power Divider N Connectors From 2 GHz to 8 GHz Rated at 30 Watts MP8769](#)

URL: <http://www.fairviewmicrowave.com/2-way-power-divider-n-8-ghz-30-watts-mp8769-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

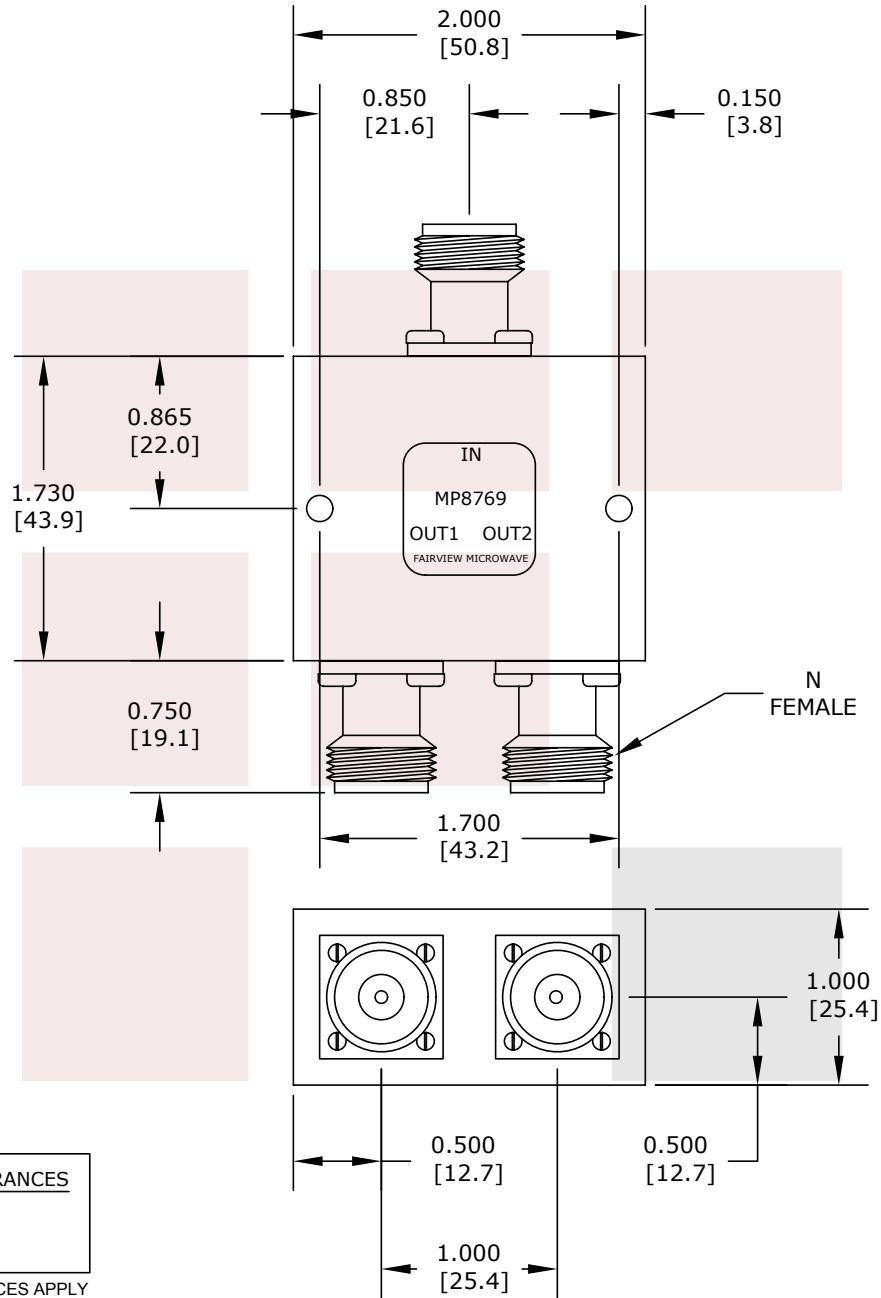

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		DWG NO		CAGE CODE	
TITLE 2 Way Power Divider N Connectors From 2 GHz to 8 GHz Rated at 30 Watts		MP8769		3FKR5	
		CAD FILE	041316	SHEET	SCALE N/A