

Matching Pad 50 Ohm N Female to 75 Ohm F Male Operating from DC to 3 GHz

Fairview Microwave's SI1555 is a 50 ohm type N female to 75 ohm type F male matching pad that operates from DC to 3 GHz. This type N to type F impedance matching pad offers a VSWR of 1.6:1 max. SI1555 50 ohm to 75 ohm minimum loss pad has a maximum CW power rating of 1 Watt.

Matching pads are used to match the different impedance between two devices, maximizing power transfer between the two impedances. Fairview Microwave's minimum loss impedance matching pads are available in various connector combinations to fit your needs, all of which ship the same day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
VSWR			1.6:1	
Attenuation		5.7		dB
Input Power, CW			1	Watt

Electrical Specification Notes:
Values at +25°C, sea level.

Mechanical Specifications

Size	
Length	2.26 in [57.4 mm]
Width	2.75 in [69.85 mm]
Height	0.8 in [20.32 mm]
Weight	0.1047 lbs [47.49 g]
Housing Material and Plating	Brass, Tri-Metal

Connector 1

Description	Connector
Type	N Female
Impedance	50 Ohms
Body Material and Plating	Brass, Tri-Metal

Connector 2

Description	Connector
Type	F Male
Impedance	75 Ohms
Body Material and Plating	Brass, Tri-Metal



Configuration:

- Connector 1: 50 Ohms N Female
- Connector 2: 75 Ohms F Male

Features:

- DC to 3 GHz Frequency Range
- VSWR < 1.6:1
- 1W Max CW Power

Applications:

- CATV / Cable Networks
- Test and Measurement
- Communication Systems
- Wireless Systems

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data





Notes:


Matching Pad 50 Ohm N Female to 75 Ohm F Male Operating from DC to 3 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Matching Pad 50 Ohm N Female to 75 Ohm F Male Operating from DC to 3 GHz SI1555](#)

URL: <https://www.fairviewmicrowave.com/matching-pad-50-ohm-n-female-75-ohm-f-male-3-ghz-si1555-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



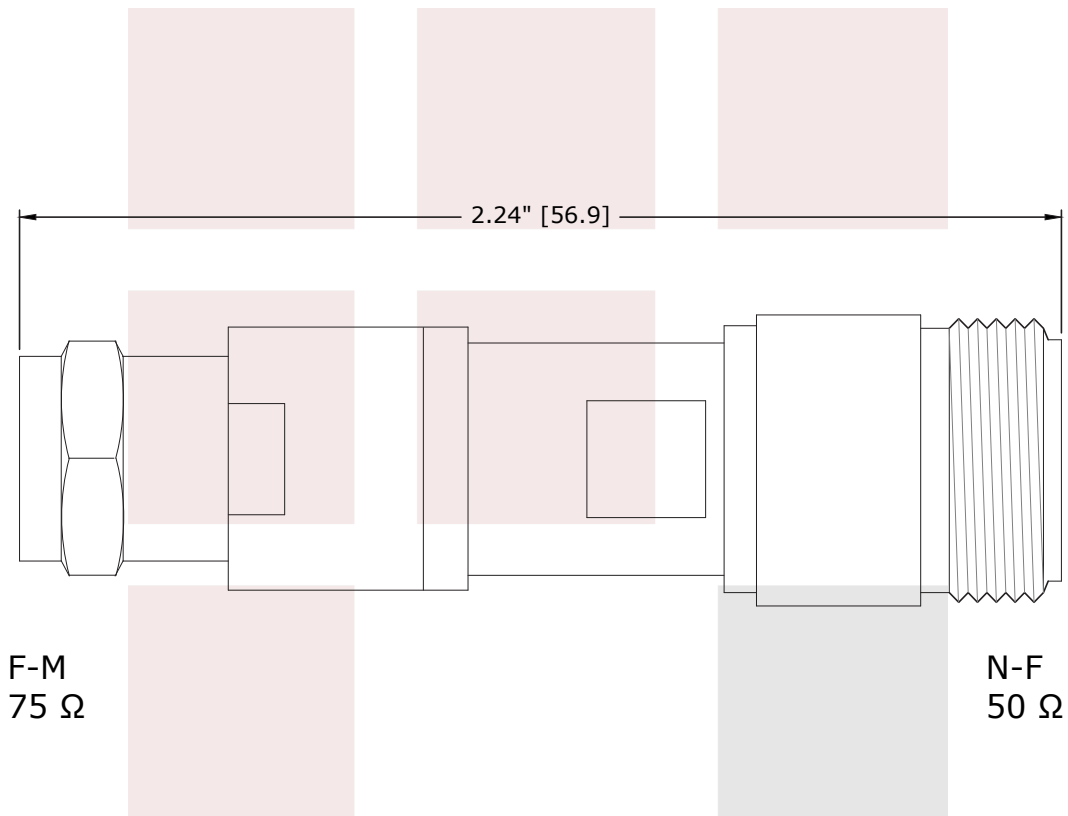

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Matching Pad 50 Ohm N Female to 75 Ohm F Male Operating from DC to 3 GHz		DWG NO SI1555		CAGE CODE 3FKR5	
CAD FILE	101915	SHEET	SCALE	N/A	SIZE A 5568