

SM4152 DATA SHEET

Precision N Male to TNC Male Adapter

Precision type N male to TNC male adapter part number SM4152 from Fairview Microwave is in-stock and ships same day. This Fairview type N to TNC adapter has a male to male gender configuration and is built of durable stainless steel in a precision design. SM4152 type N male to TNC male adapter operates to 18 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.15:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length

1.886 in [47.9 mm]

Weight 0.11817 lbs [53.6 g]

Description	Connector 1	Connector 2		
Туре	N Male	TNC Male		
Polarity	Standard	Standard		
Mating Cycles	500	500		
Mating Torque	12 to 15 in-lbs			
	[1.36 to 1.70 Nm]			

Material Specifications

Description	Connector 1	Connector 2		
Туре	N Male	TNC Male		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold over Nickel	Gold over Nickel		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	Oxide-Noryl	PTFE		
Body Material	Passivated Stainless Steel	Passivated Stainless Steel		
Body Plating Spec.	ASTM A380	ASTM A380		
Coupling Nut Material	Passivated Stainless Steel	Passivated Stainless Steel		
Coupling Nut Plating Spec.	ASTM A380	ASTM A380		



Configuration:

- N Male Connector 1
- TNC Male Connector 2
- 50 Ohms
- Precision Design
- Straight Body Geometry

Features:

- VSWR of 1.15:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test
- Precision Test & Measurement

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

rax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

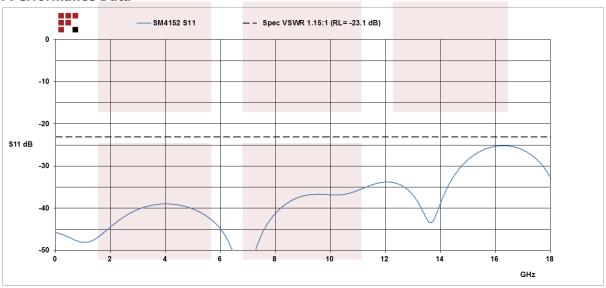

Precision N Male to TNC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Precision N Male to TNC Male Adapter SM4152

URL: https://www.fairviewmicrowave.com/n-male-tnc-male-adapter-sm4152-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 1.1 Page 2 of 3





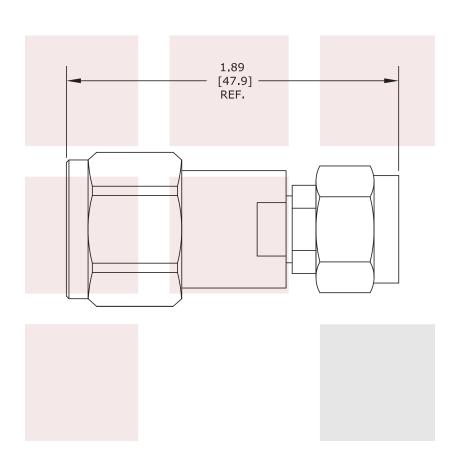

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Precision N Male to TNC Male Adapter	DWG NO SM4152			CAGE CODE 3FKR5		
	CAD FILE 121015	SHEET	SCAL	E N/A	SIZE A	150